


L K HOIST

NO	DESCRIPTION	SIZE	MAT' L	Q' TY	WT (kg)	REMARKS

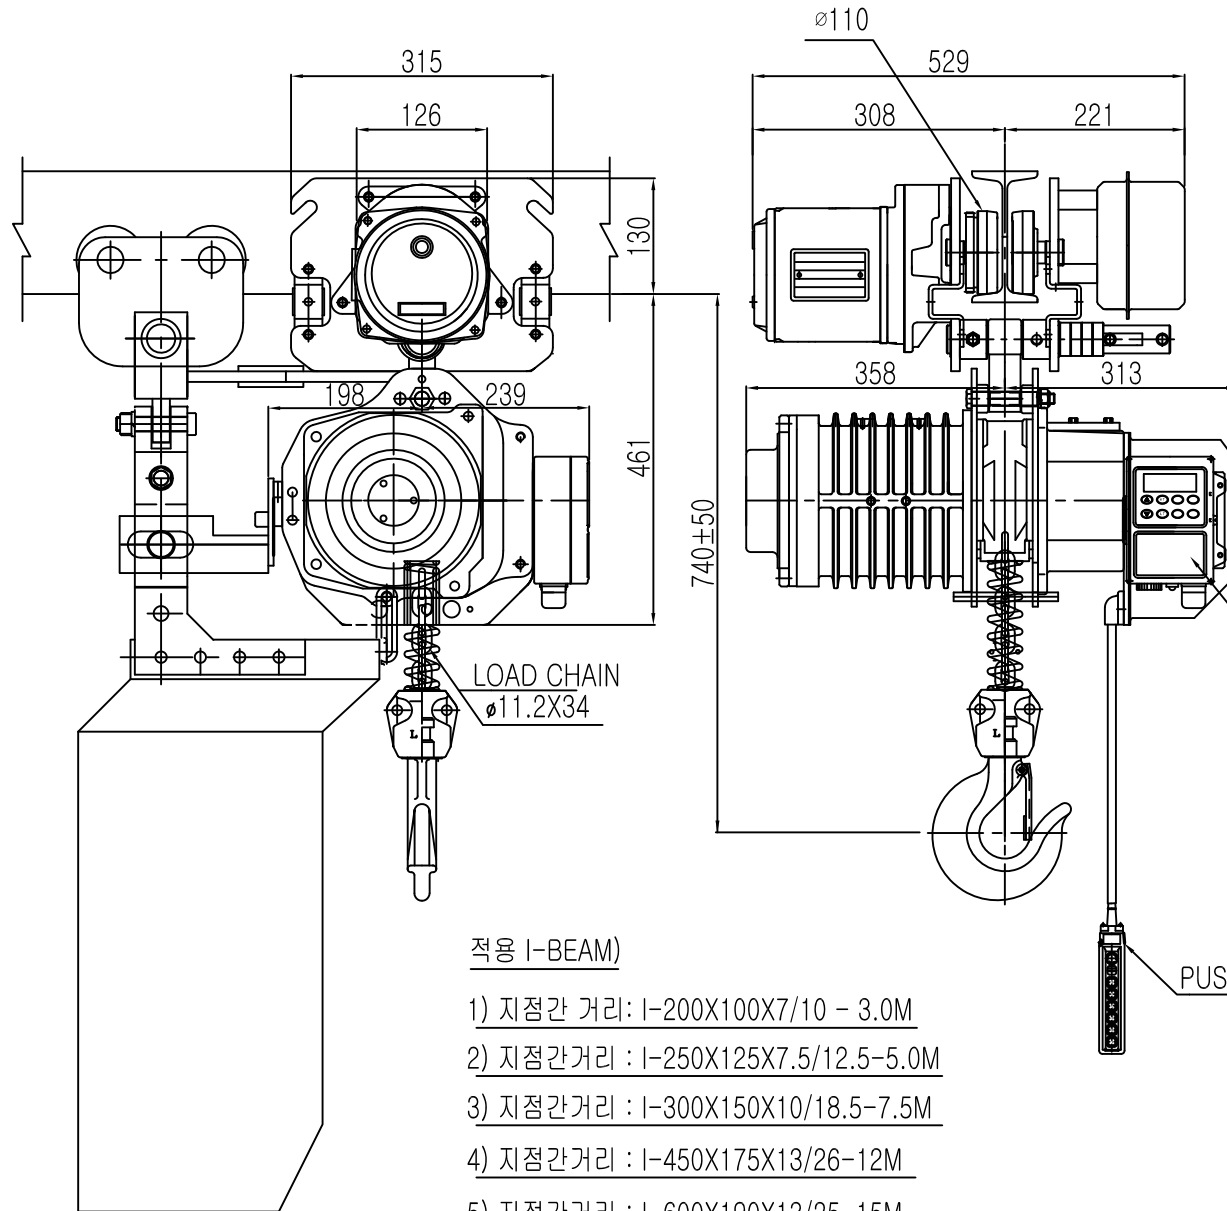

SPECIFICATION

		LK-DAM-2S		
RATED LOAD	(TON)	2.0		
TESTING LOAD	(TON)	2.5		
LIFTING HEIGHT	(M)	50		
HOISTING	SPEED (M/MIN)	8.1		
	MOTOR (KW)	3.5kw x 4p		
TRAVERSING	SPEED (M/MIN)	21	14	21/7
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p	0.75/0.25kw x 4/12p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON . FL		
LOAD CHAIN		ø11.2 X 34 (1FALL)		
WEIGHT (KG)		300KG		
I-BEAM 적용폭		100 ~ 190MM		

LOAD LIMITER


PUSH BUTTON S/W

NOTE)

- 1)점검 설비를 갖출 것
- 2)인허가 서류를 완성검사시 제출 할 것

적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

TITLE					PROJECTION	
ELECTRIC CHAIN HOIST DAM-2S						
WORK	NO	WORK			NAME	
		LK-DAM-2S			SCALE	Q' TY
						1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE	NO	
2010.08.01						
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

L K HOIST


NO	DESCRIPTION	SIZE	MAT' L	Q' TY	WT (kg)	REMARKS

SPECIFICATION

		LK-DAM-2S		
RATED LOAD (TON)		2.0		
TESTING LOAD (TON)		2.5		
LIFTING HEIGHT (M)		50		
HOISTING	SPEED (M/MIN)	8.1		
	MOTOR (KW)	3.5kw x 4p		
TRAVERSING	SPEED (M/MIN)	21	14	21/7
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p	0.75/0.25kw x 4/12p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON . FL		
LOAD CHAIN		ø11.2 X 34 (1FALL)		
WEIGHT (KG)		300KG		
I-BEAM 적용폭		100 ~ 190MM		


NOTE

- 1)점검 설비를 갖출 것
- 2)인허가 서류를 완성검사시 제출 할 것

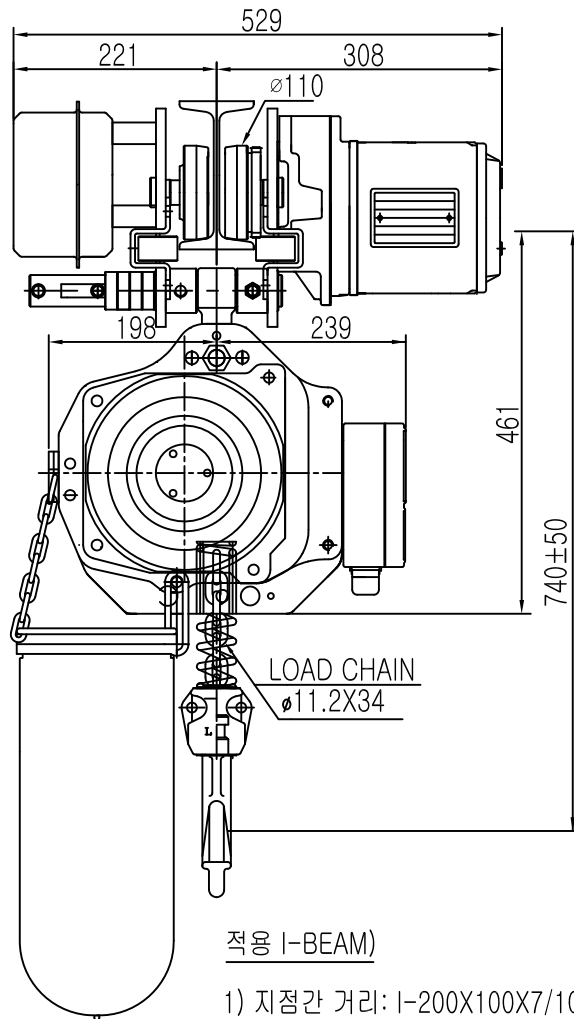


적용 I-BEAM)

- 1) 지점간 거리 : I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

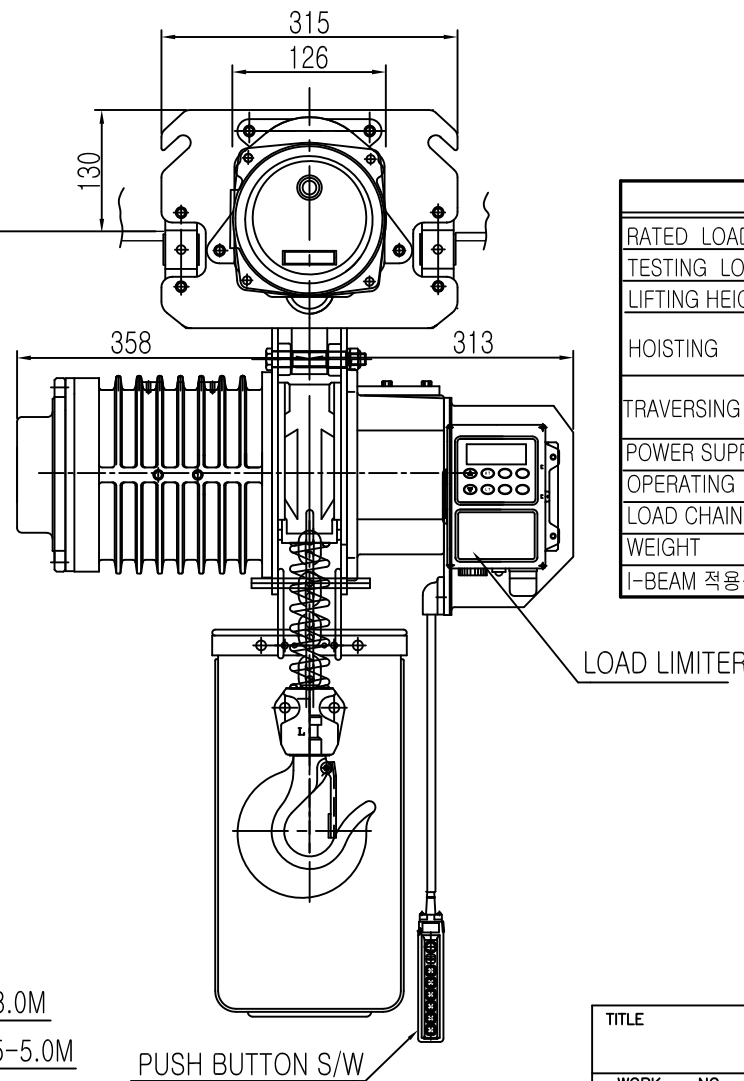

LOAD LIMITER


PUSH BUTTON S/W

TITLE					PROJECTION	
ELECTRIC CHAIN HOIST						
WORK	NO	WORK NAME				
		LK-DAM-2S				
		SCALE	Q' TY			
		N/S 1				
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE NO		
2010.08.01						
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

L K HOIST

NO	DESCRIPTION	SIZE	MAT'L	Q'TY	WT (kg)	REMARKS

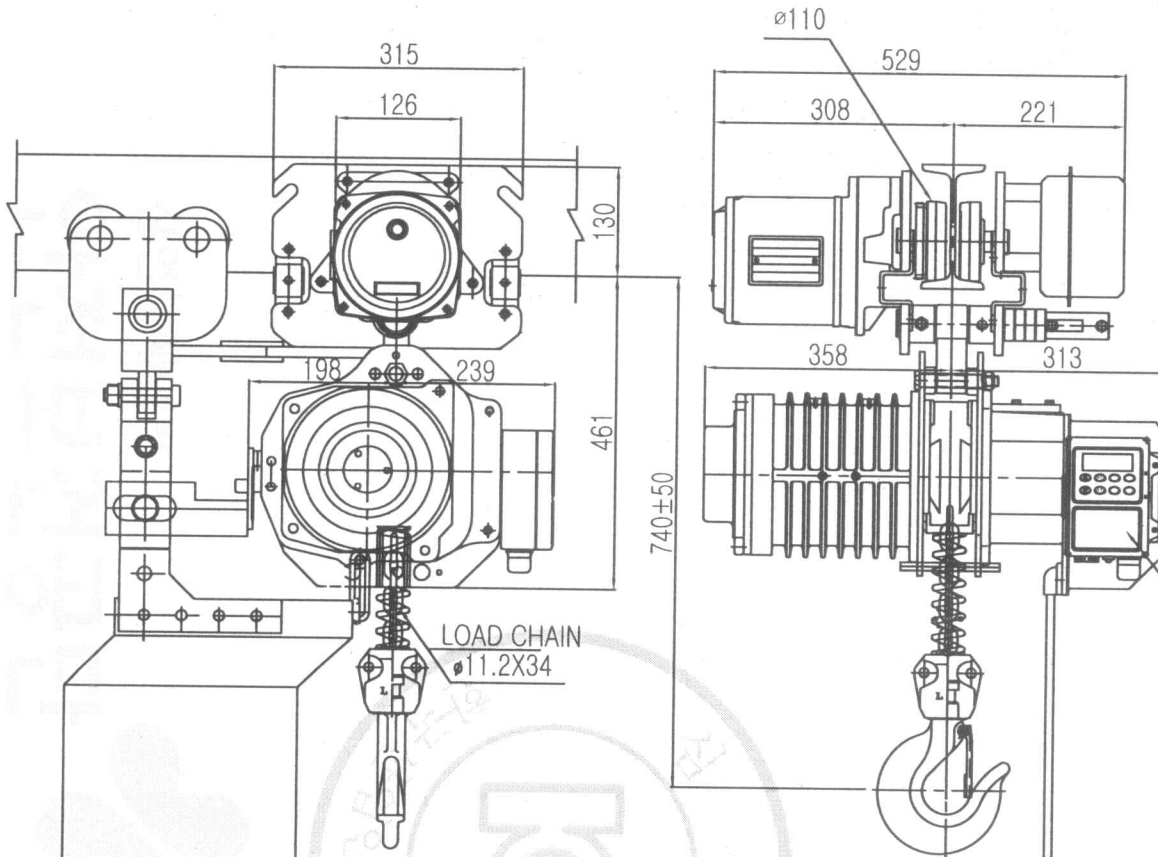

SPECIFICATION

		LK-DAM-2S		
RATED LOAD (TON)		2.0		
TESTING LOAD (TON)		2.5		
LIFTING HEIGHT (M)		50		
HOISTING	SPEED (M/MIN)	8.1		
	MOTOR (KW)	3.5kw x 4p		
TRAVERSING	SPEED (M/MIN)	21	14	21/7
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p	0.75/0.25kw x 4/12p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON , FL		
LOAD CHAIN		ø11.2 X 34 (1FALL)		
WEIGHT (KG)		300KG		
I-BEAM 적용폭		100 ~ 190MM		

NOTE)

- 1)점검 설비를 갖출 것
- 2)인허가 서류를 완성검사시 제출 할 것

적용 I-BEAM)


- 1) 지점간 거리: I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

TITLE				PROJECTION			
ELECTRIC CHAIN HOIST DAM-2S				 			
WORK NO		WORK NAME		SCALE		Q' TY	
		LK-DAM-2S				1	
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
김 창 기				CODE NO			
2010.08.01							
				L K HOIST CO., LTD.			

제출된 설계도면

L K HOIST

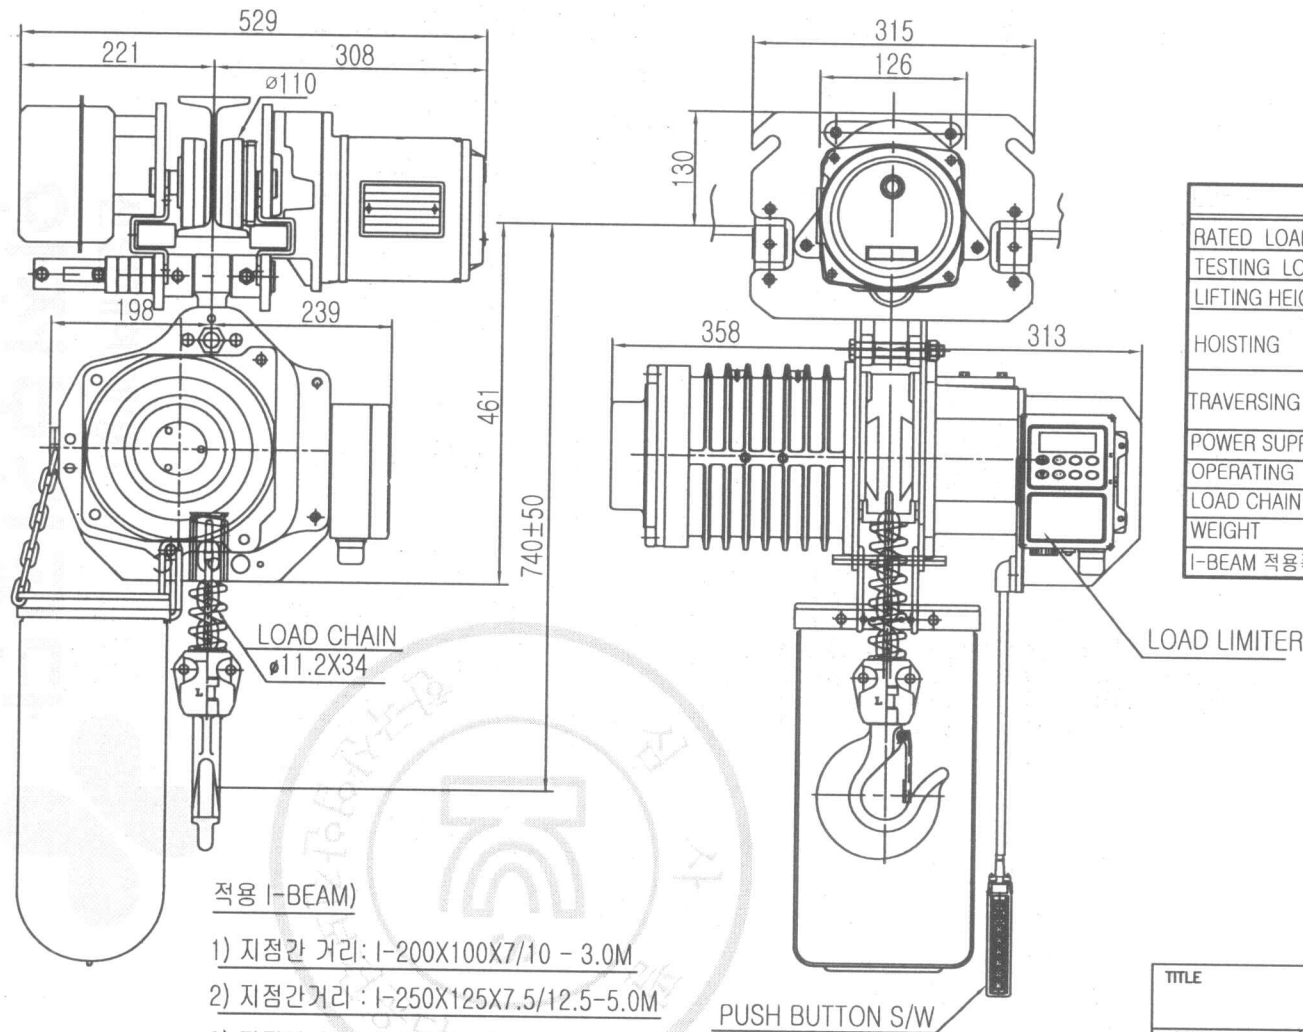

적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

SPECIFICATION

LK-DAM-2S	
RATED LOAD (TON)	2.0
TESTING LOAD (TON)	2.5
LIFTING HEIGHT (M)	50
HOISTING SPEED (M/MIN)	8.1
MOTOR (KW)	3.5kw x 4p
TRAVERSING SPEED (M/MIN)	21
MOTOR (KW)	14
POWER SUPPLY	AC220,380,440,460,480Vx3ø x 60 Hz
OPERATING METHOD	P.B type ON . FL
LOAD CHAIN	ø11.2 X 34 (1FALL)
WEIGHT (KG)	300KG
I-BEAM 적용폭	100 ~ 190MM

NOTE

- 1)점검 설비를 갖출 것
- 2)인허가 서류를 완성검사시 제출 할 것

TITLE				PROJECTION	
ELECTRIC CHAIN HOIST				 	
WORK NO		WORK NAME			
		LK-DAM-2S		SCALE	Q' TY
				N/S	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO	
김 창 기				CODE NO	
2010.08.01					
LK L K HOIST CO., LTD.					

REV. NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED

제 품 명 : 전기 사슬 리프트