

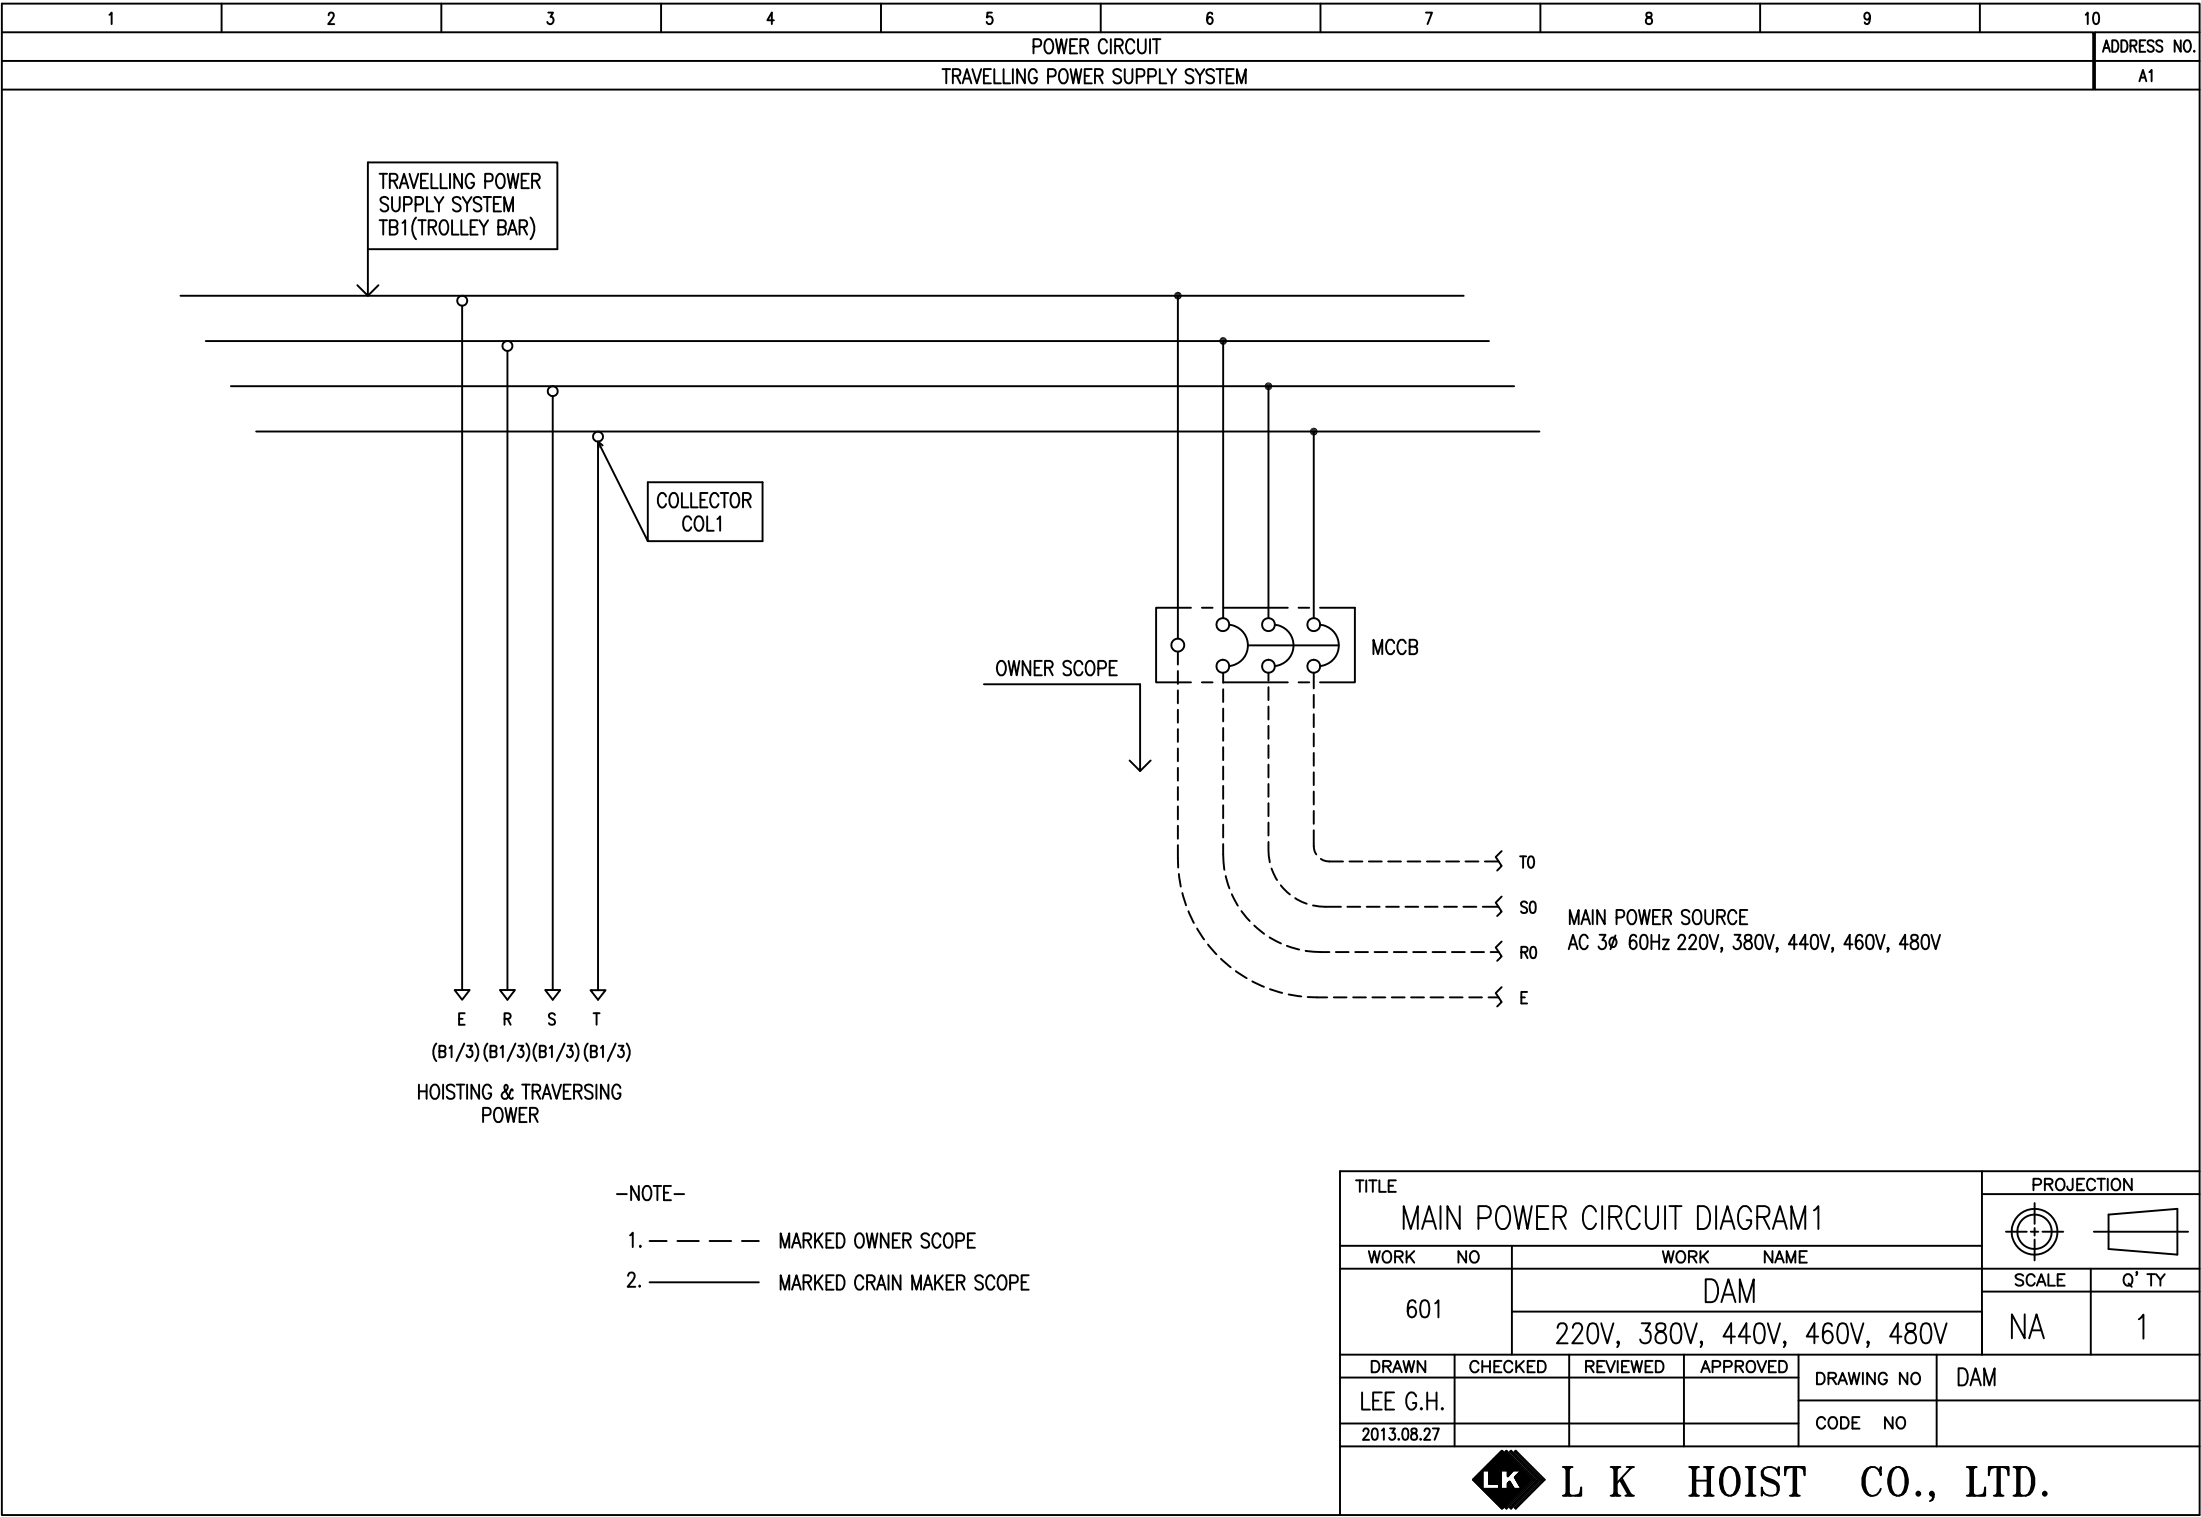


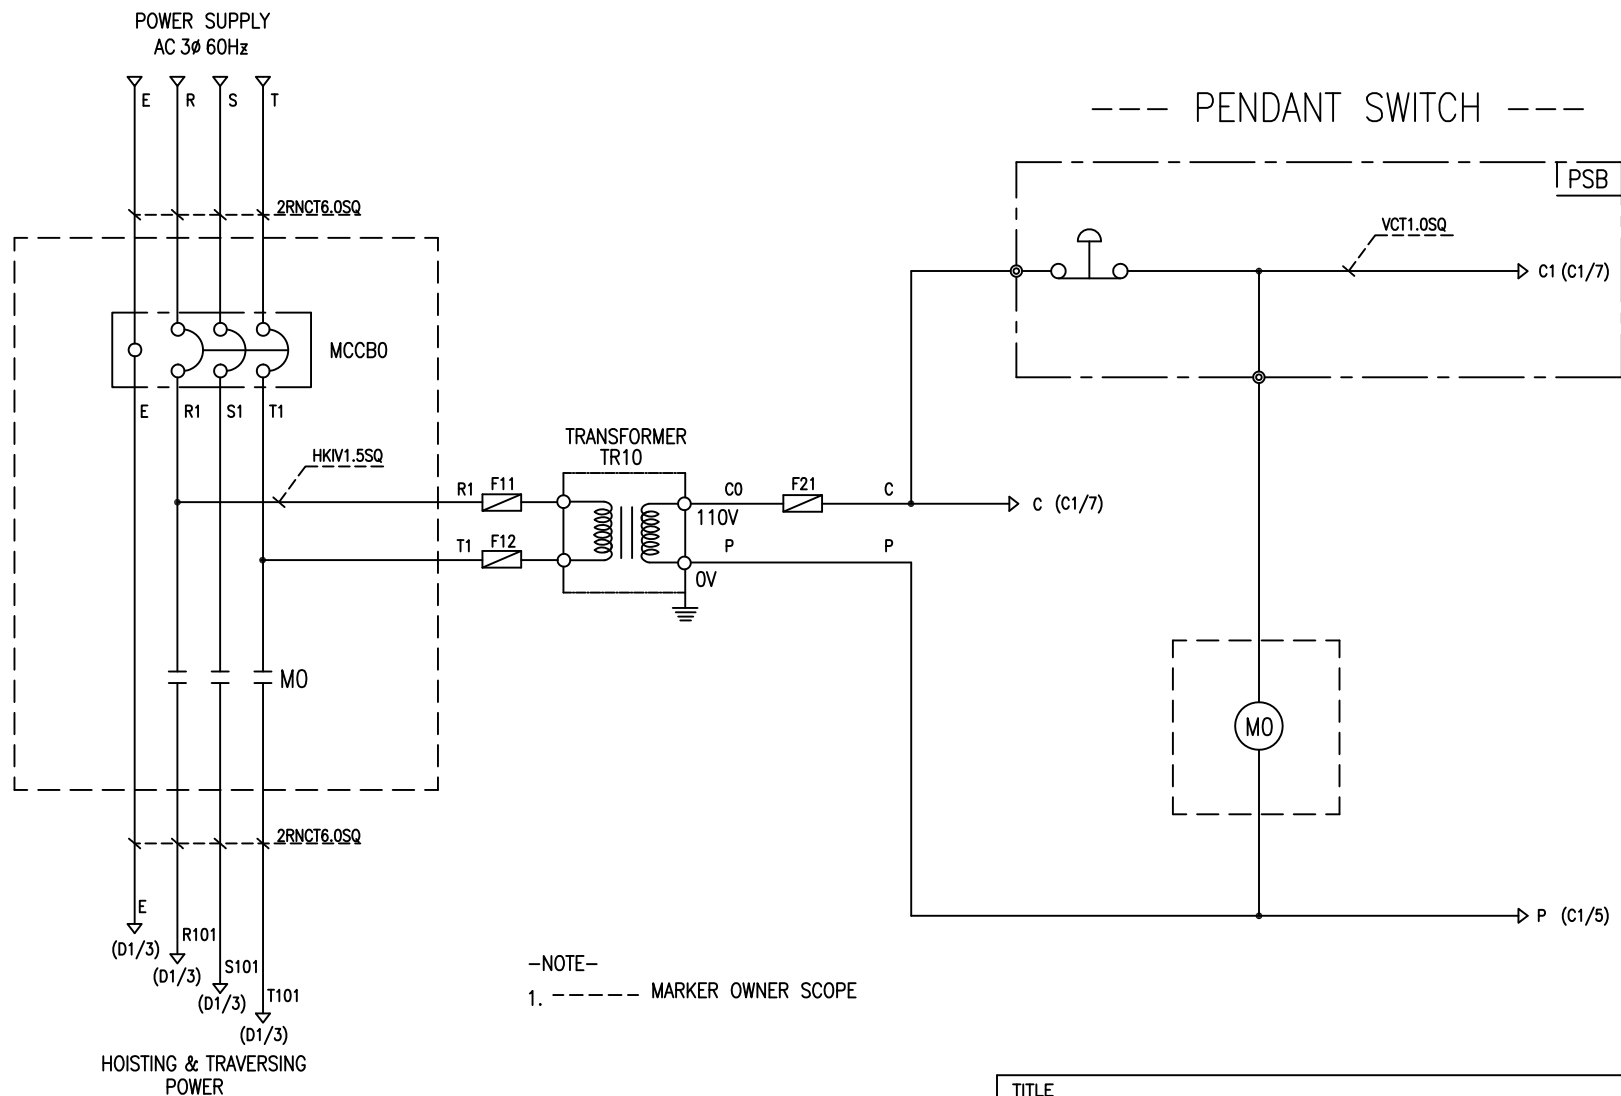


1	2	3	4	5	6	7	8	9	10		
POWER CIRCUIT					CONTROL CIRCUIT					ADDRESS NO.	B1



SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACT		TRANSFORMER	FUSE
SYMBOLS	MCCB0		M0		TR10	F11, F12, F21
DESCRIPTION	220V	50A	GMC22	DMC-22	40VA	1A
	380V	30A				
	440V	20A				
	460V	20A				
	480V	20A				
MAKER	LS		LS	DONGA	LK	-


TITLE					PROJECTION	
MAIN POWER & CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK			NAME	
602		DAM			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			NA	1
DRAWN	CHECKED	REVISED	APPROVED	MODEL	DAM	
LEE.G.H				CODE NO		
2013.08.27						
 L K HOIST CO., LTD.						

1	2	3	4	5	6	7	8	9	10		
HOIST POWER CIRCUIT					HOIST CONTROL CIRCUIT					ADDRESS NO.	C1

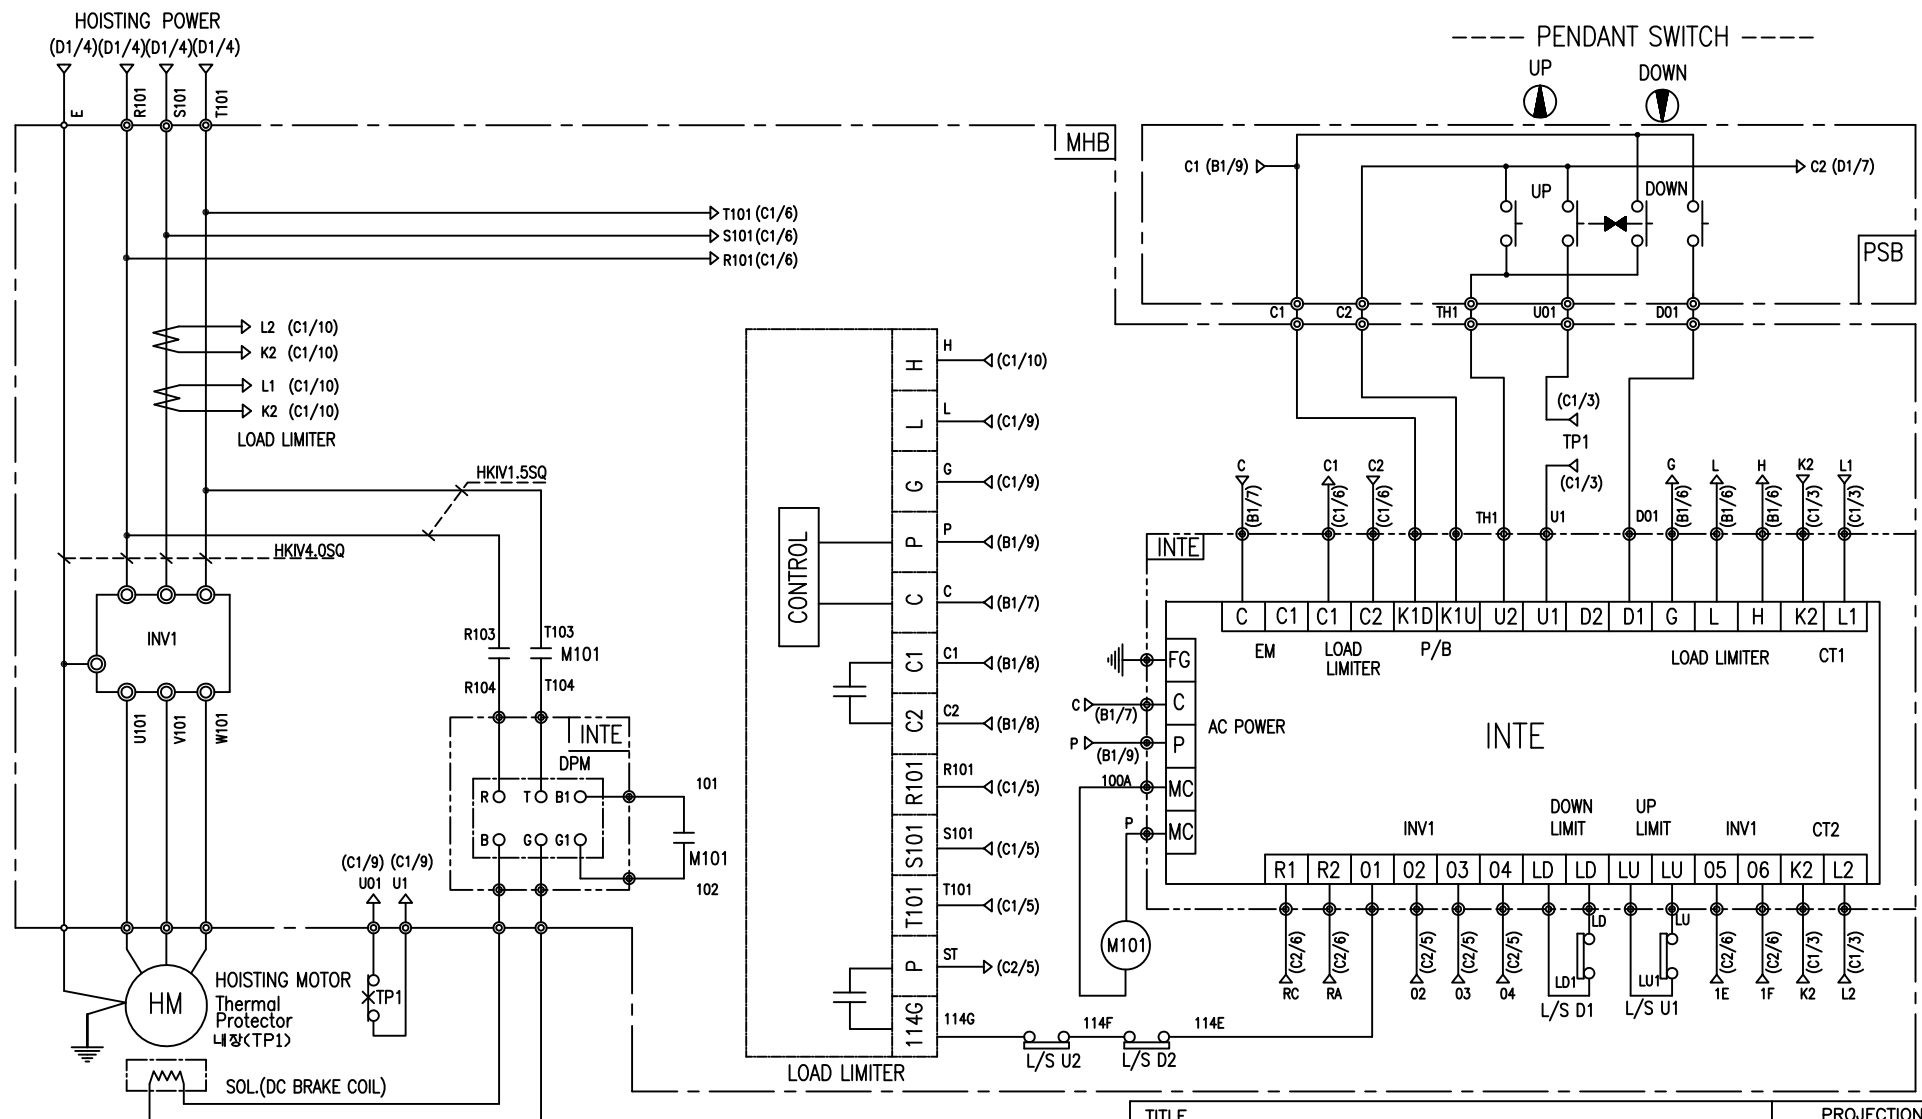


—NOTE—
1. —— : Mechanical Interlock

SPECIFICATION	MAGNET CONTACT	LOAD LIMITER	SILICON RECTIFIER					Thermal Protector	HOIST MOTOR
SYMBOLS	M101	—	DPM					TP1	HM
DESCRIPTION	DMC25C	LKDL-60	AC220V	AC380V	AC440V	AC460V	AC480V	17AM032	3.5Kw * 4P
			DC99V	DC171V	DC198V	DC207V	DC216V		
MAKER	DONG-A	LK	LK					Texas Instruments	LK

TITLE					PROJECTION	
HOIST POWER & CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK NAME				
603		DAM			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			NA	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	DAM	
LEE.G.H				CODE NO		
2013.08.27						
 L K HOIST CO., LTD.						


1	2	3	4	5	6	7	8	9	10	
HOIST CONTROL CIRCUIT									ADDRESS NO.	C2

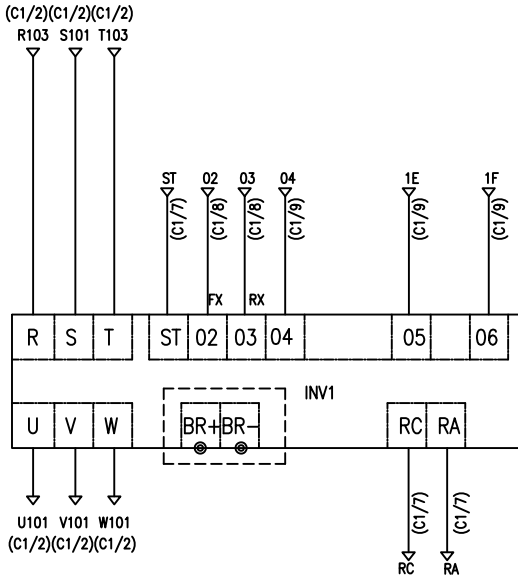


-NOTE-


1. ---- : OPTION SCOPE

SPECIFICATION	INVERTER	BRAKING RESISTOR
SYMBOLS	INV1	BR
DESCRIPTION	3.7KW	400W 150 OHM
MAKER	ROCKWELL	—

TITLE						PROJECTION	
INVERTER CONTROL CIRCUIT DIAGRAM							
WORK NO		WORK NAME					
604		HOISTING				SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V				NA	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL		DAM	
LEE.G.H							
2013.08.27				CODE NO			
 L K HOIST CO., LTD.							

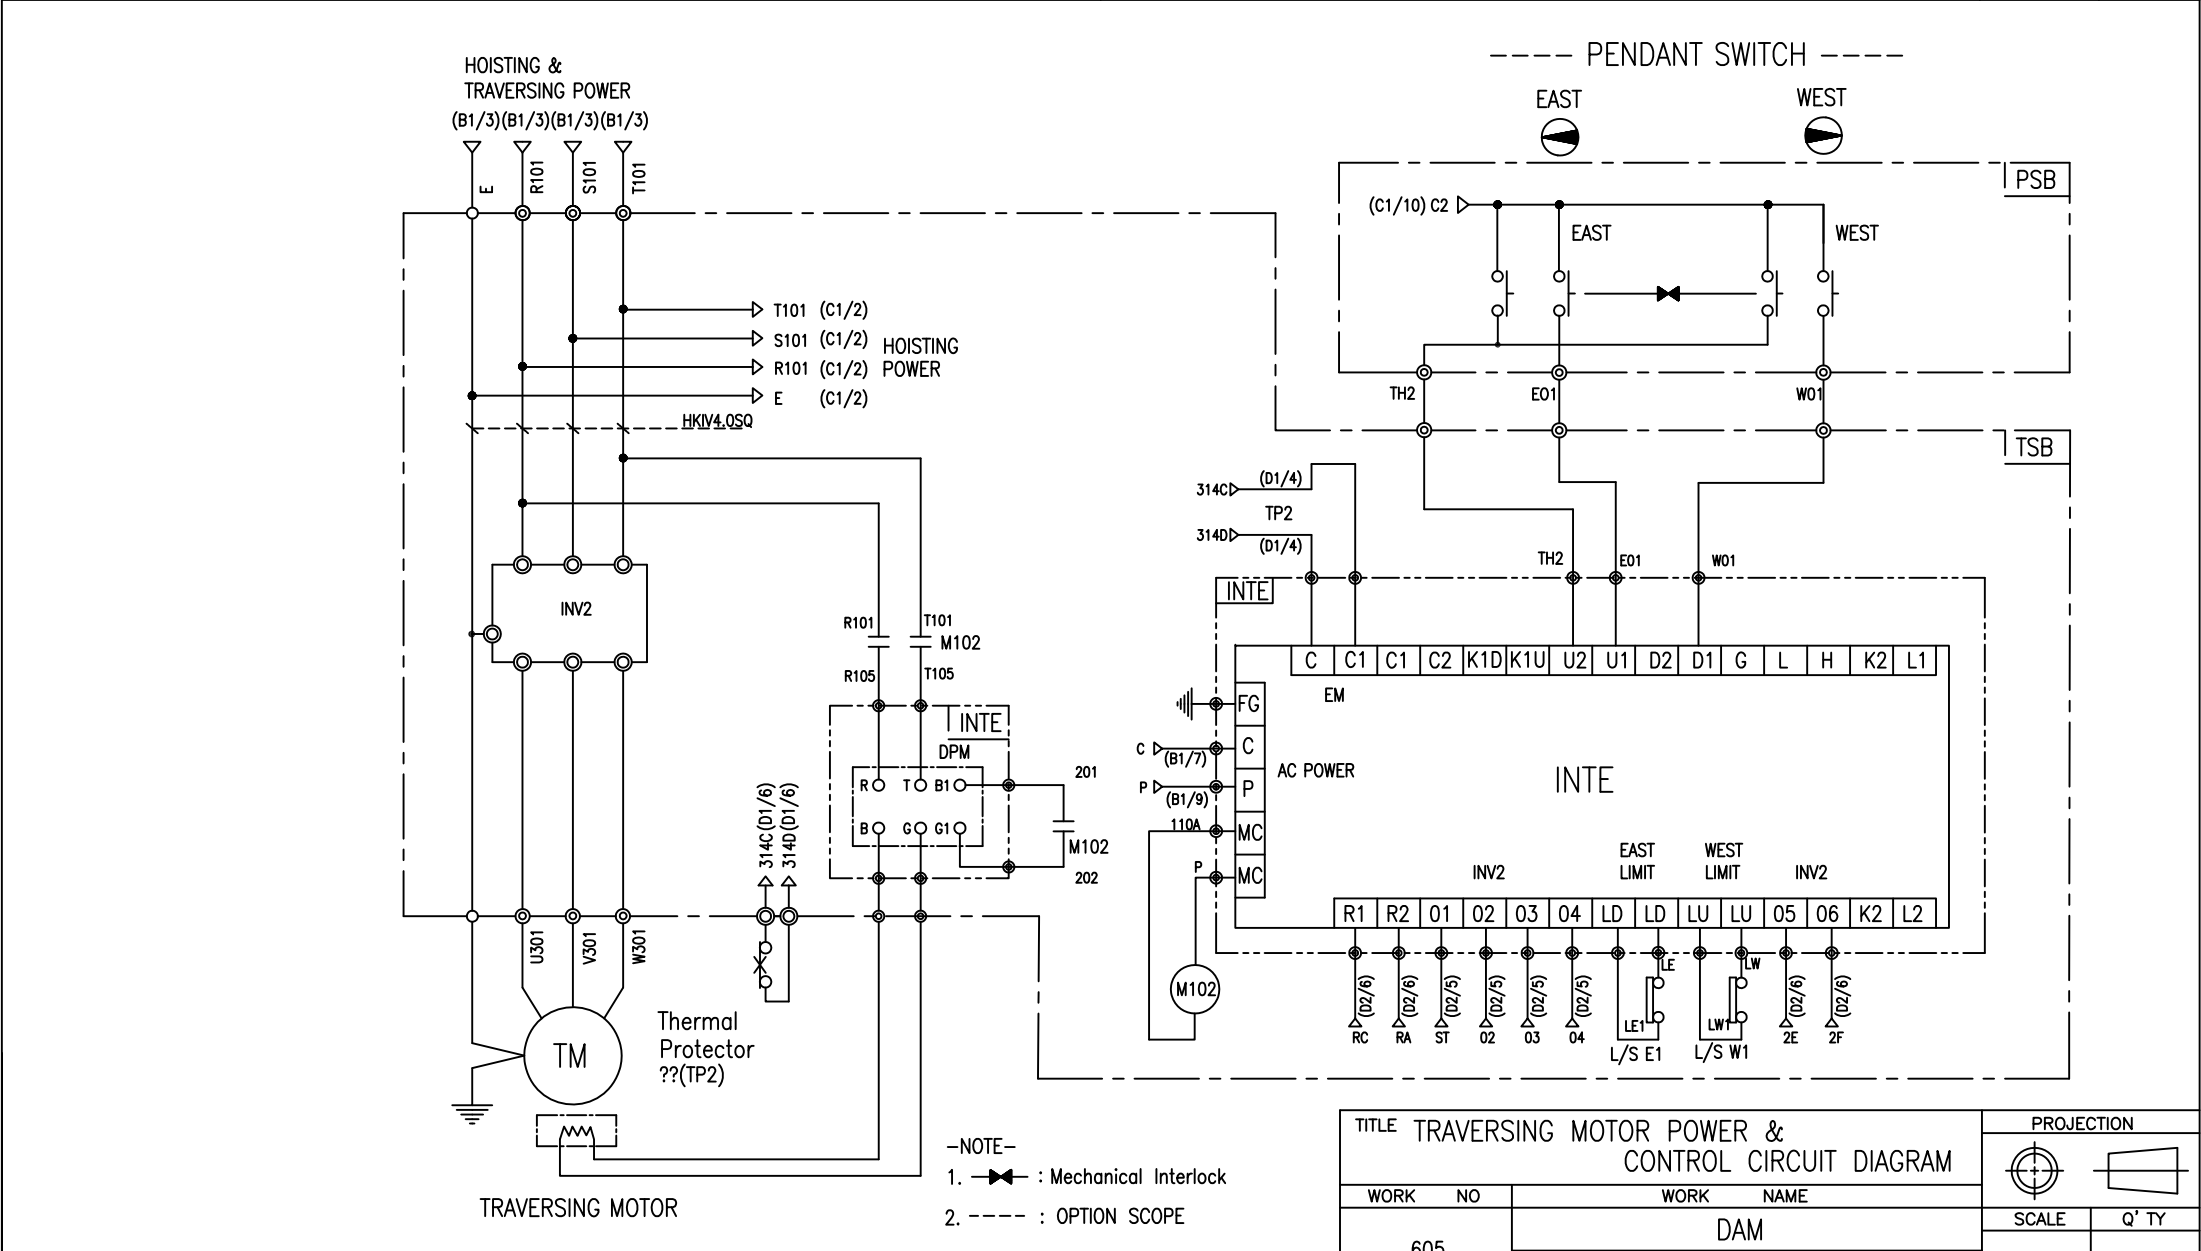


1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

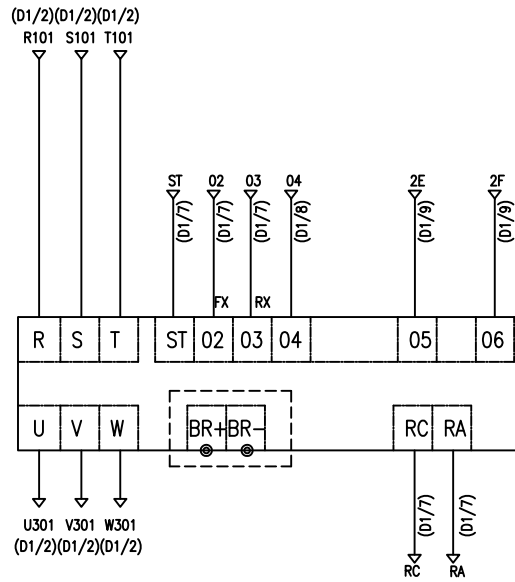

1. ---- : OPTION SCOPE

SPECIFICATION	INVERTER	BRAKING RESISTOR
SYMBOLS	INV2	BR
DESCRIPTION	0.75KW	80W 750 OHM
MAKER	ROCKWELL	—

TITLE					PROJECTION	
INVERTER CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK NAME				
606		TRAVERSING			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			NA	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	DAM	
LEE.G.H				CODE NO		
2013.08.27						
 L K HOIST CO., LTD.						

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	3.5 - 4 - 48	
4. RATED POWER	3.5 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	480 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	1740 RPM	
12. FULL LOAD CURRENT	7.9 A	
13. STARTING CURRENT AT RATED VOLTAGE	38.5 A	
14. MINIMUM STARTING VOLTAGE	432 V	
15. EFFICIENCY AT 100% RATED LOAD	73.5 %	
16. POWER FACTOR AT 100% RATED LOAD	73.0 %	
17. STARTING TORQUE	247 %	
18. TYPE OF ENCLOSURE	전폐형(IP-54)	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75 - 4 - 48	
4. RATED POWER	0.75 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	480 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1670 RPM	
12. FULL LOAD CURRENT	2.2 A	
13. STARTING CURRENT AT RATED VOLTAGE	12.1 A	
14. MINIMUM STARTING VOLTAGE	432 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.4 - 6 - 48	
4. RATED POWER	0.4 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	480 V	60HZ
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	1.47 A	
13. STARTING CURRENT AT RATED VOLTAGE	8.1 A	
14. MINIMUM STARTING VOLTAGE	432 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	