





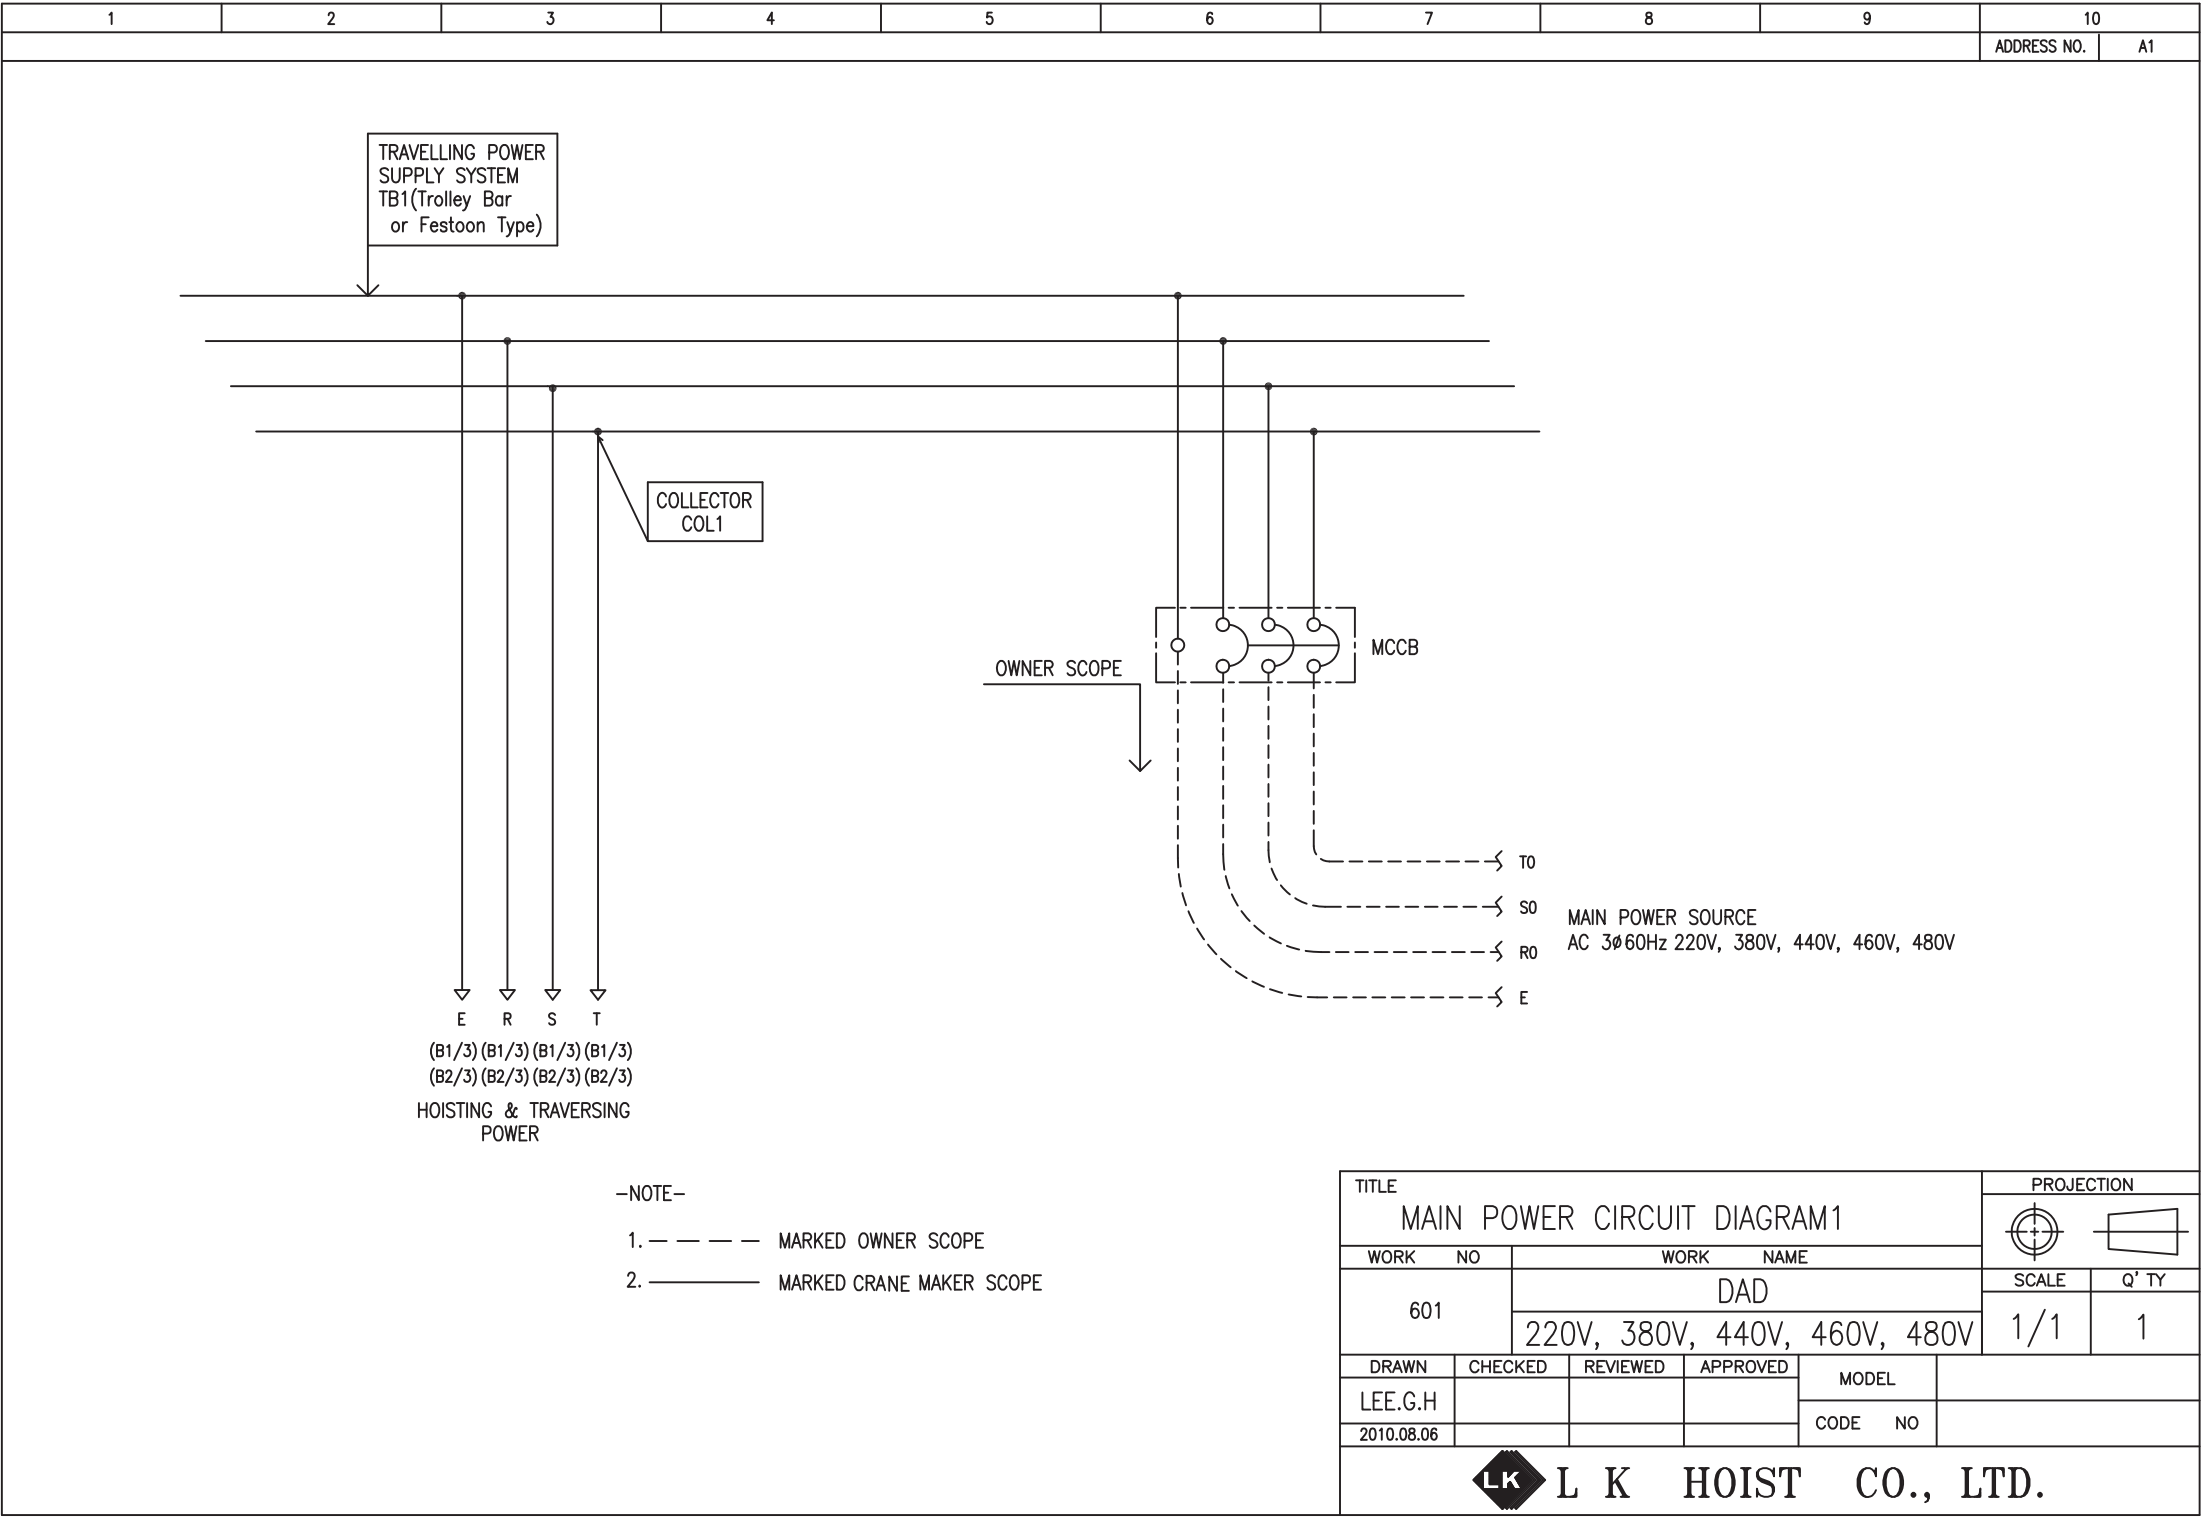


TITLE					PROJECTION	
HOISTING POWER CIRCUIT DIAGRAM						
WORK NO		WORK NAME			SCALE	
603		DAD			Q' TY	
		380V				
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL		
LEE.G.H				CODE NO	CODE_NO	
2010.08.06						
 L K HOIST CO., LTD.						

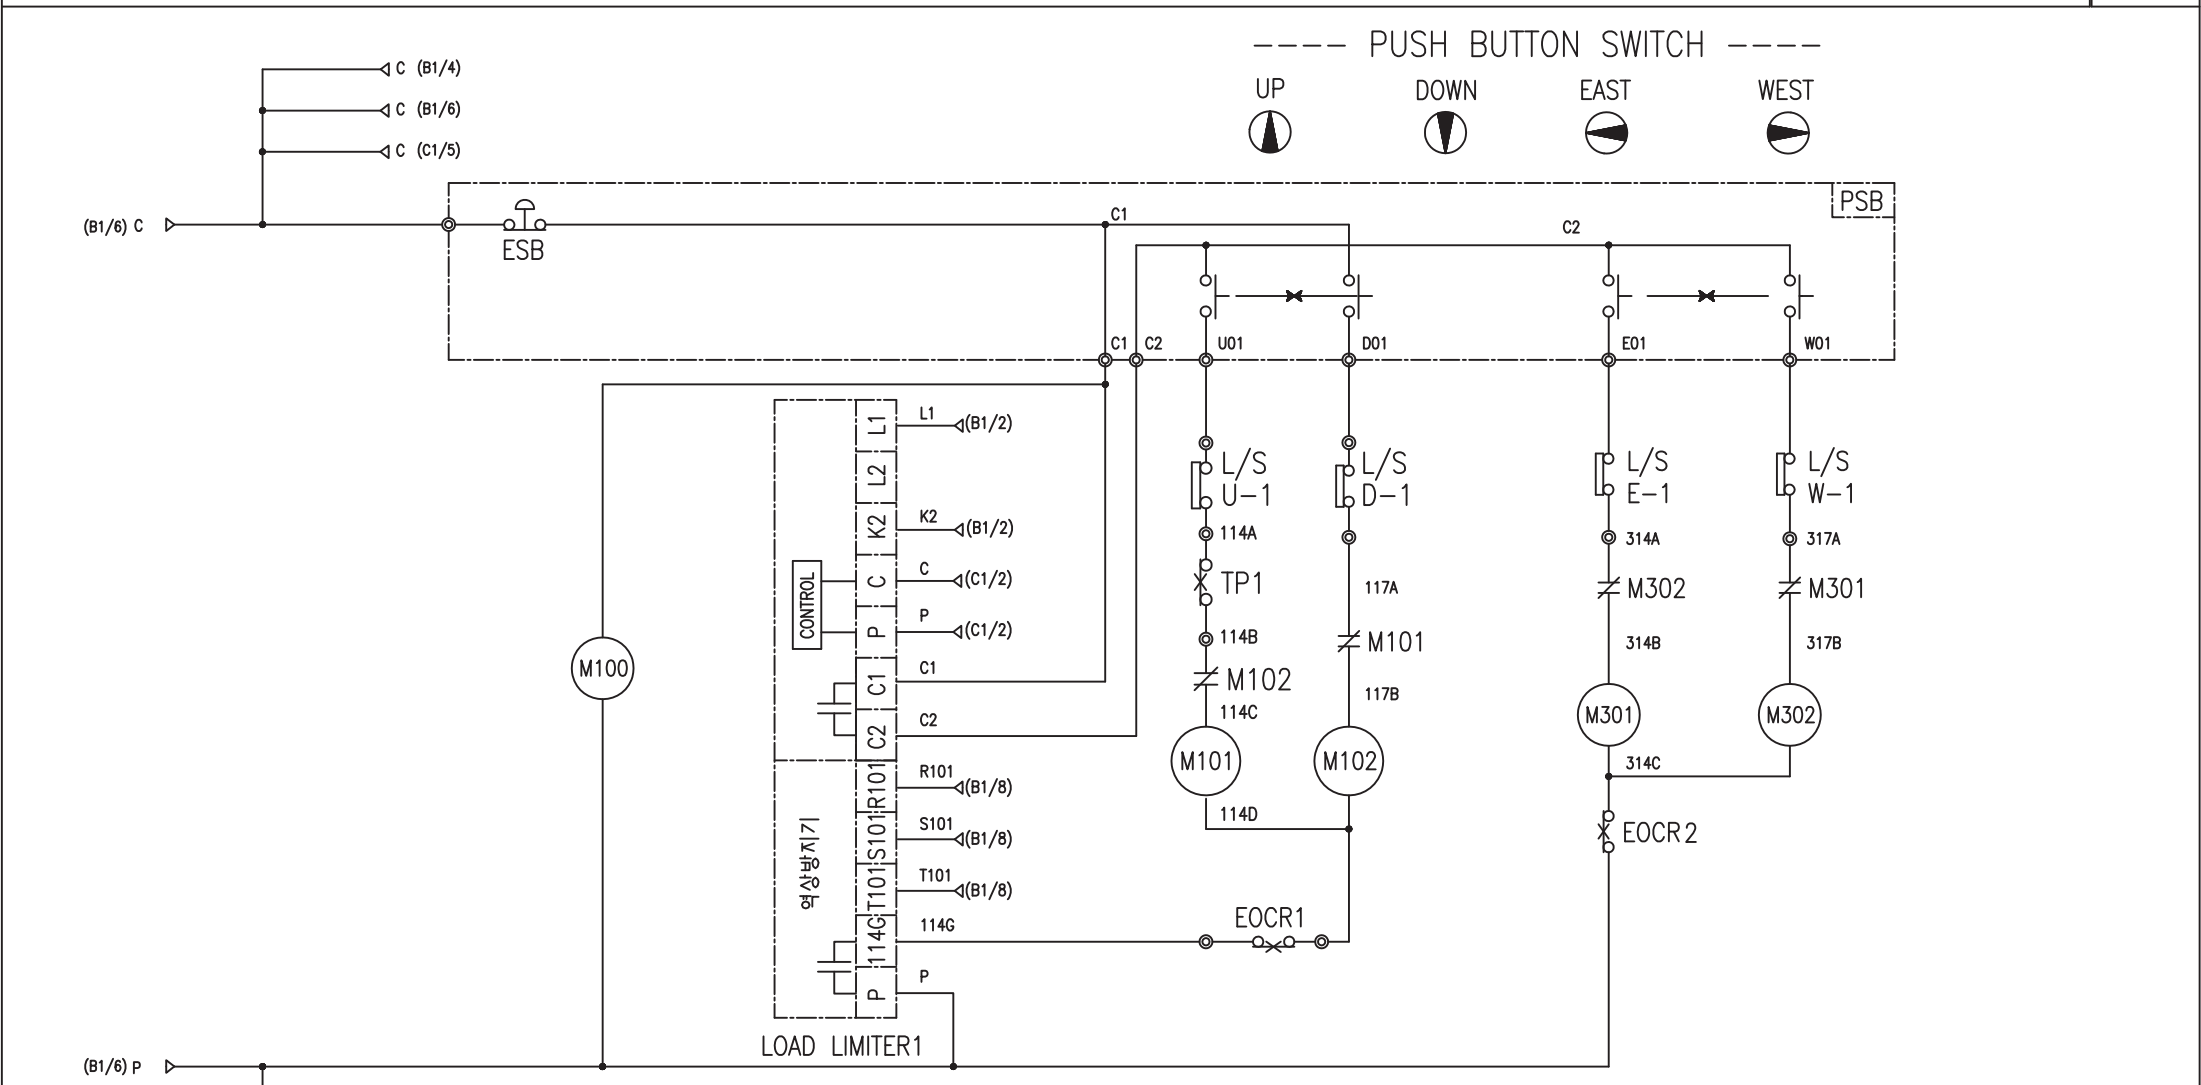

SPECIFICATION	LOAD LIMITER
SYMBOLS	LKDL601
DESCRIPTION	1A - 50A
MAKER	LK

—NOTE—
1. —X— : Mechanical Interlock

TITLE				PROJECTION	
HOISTING CONTROL CIRCUIT DIAGRAM				1st Angle	
WORK NO.	WORK NAME			SCALE	Q' TY
604	DAD				
220V, 380V, 440V, 460V, 480V					
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	
LEE.G.H					
2010.08.06				CODE NO	CODE_NO
L K HOIST CO., LTD.					

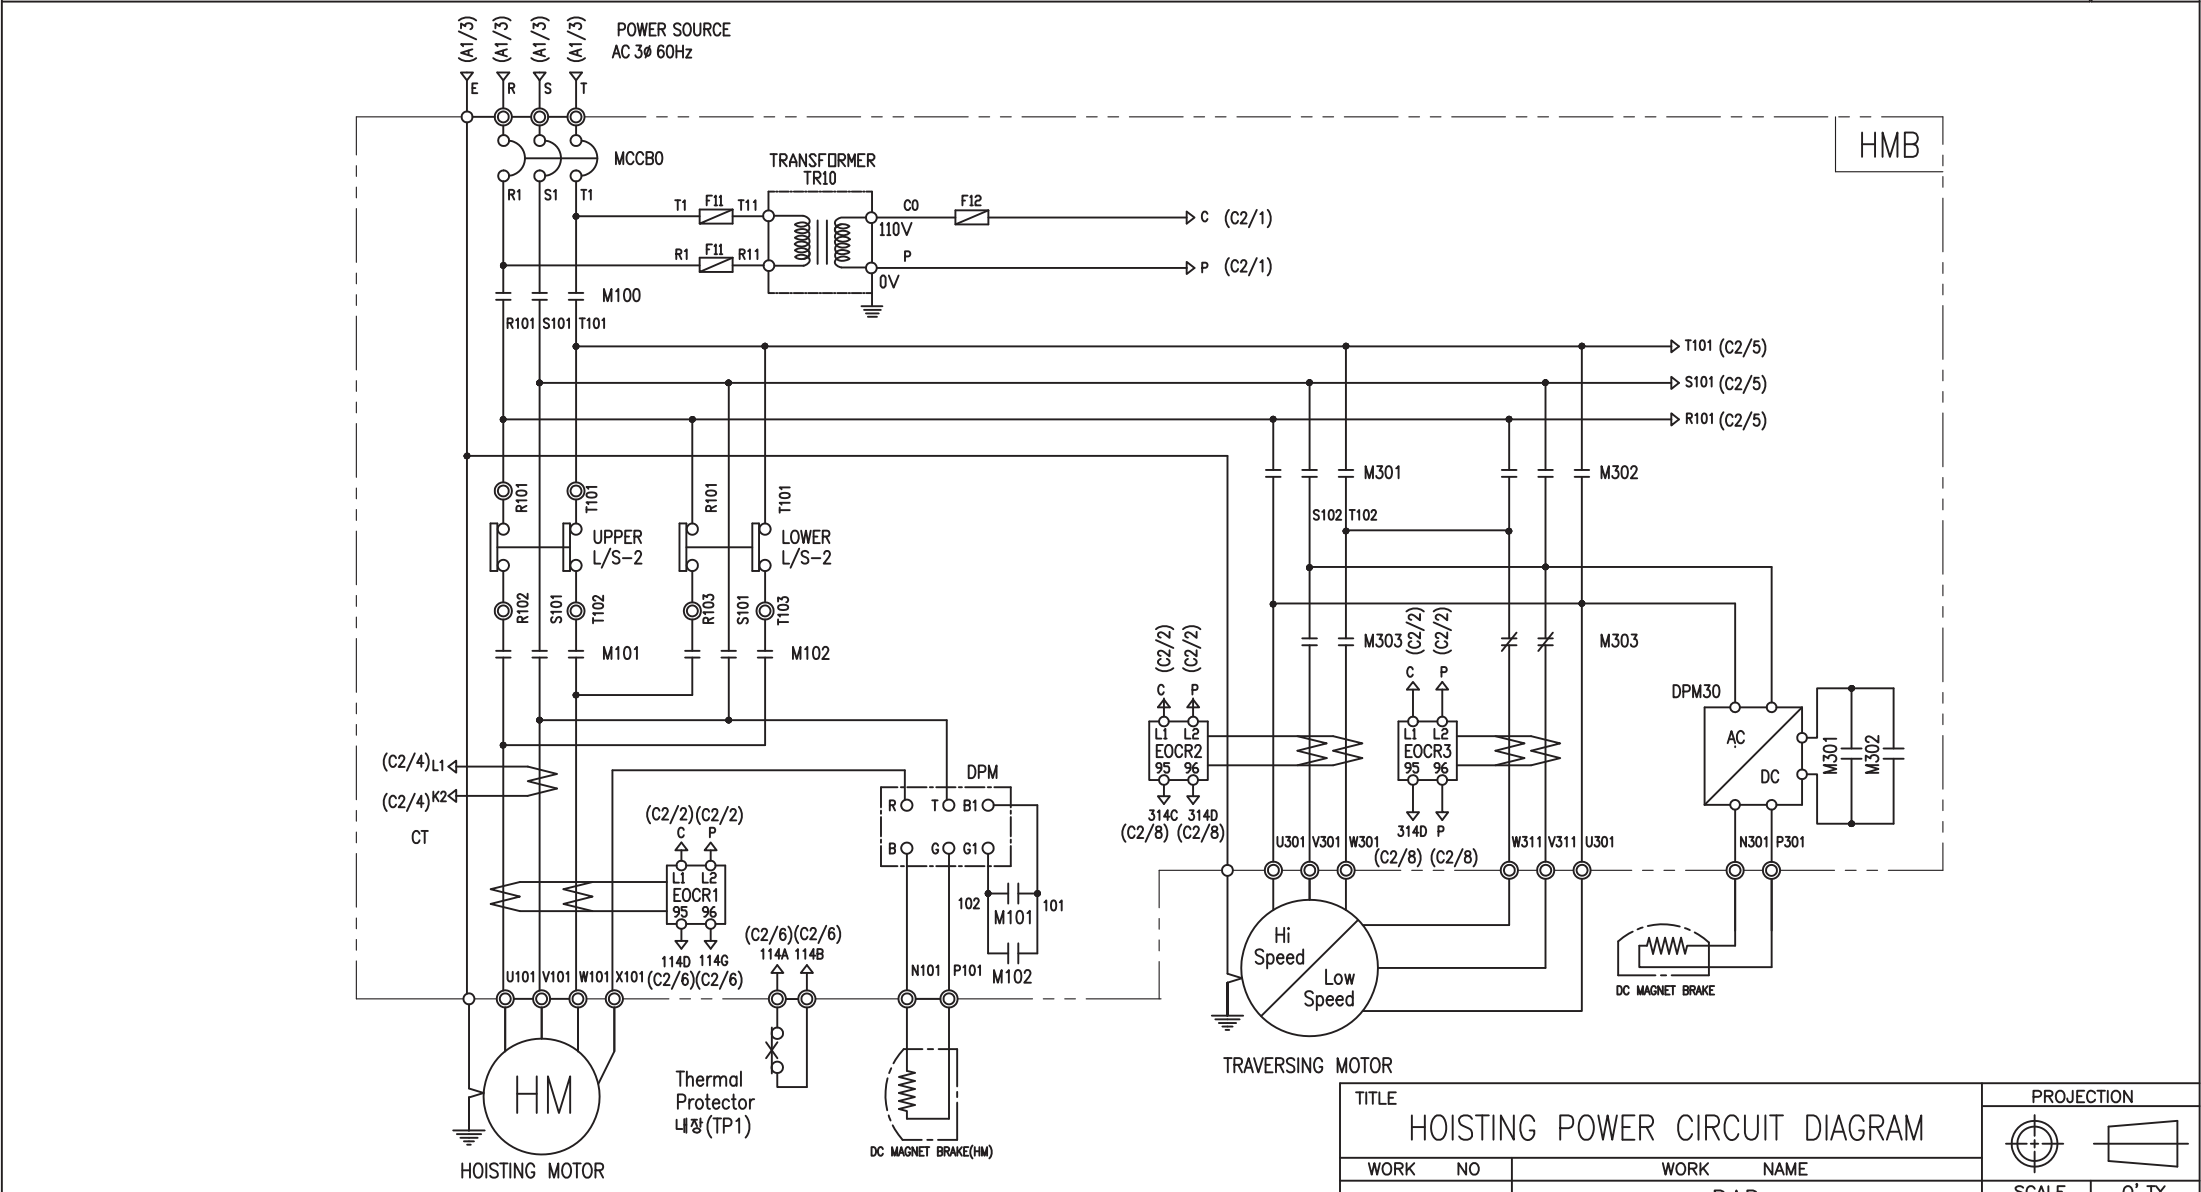

SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACTOR		TRANSFORMER	SILICON RECTIFIER		과전류계전기		FUSE		HOISTING MOTOR	TRAVERSING MOTOR
SYMBOLS	MCCB0		M100, M101, M102	M301, M302	TR10	DPM	DPM30	EOCR1	EOCR2 EOCR3	F11	F12	HM	TM
DESCRIPTION	380V	30A	DMC22	DMC22	60 VA	AC220V DC99V	AC380V DC171V	SS-30	SS-06	1A	2A	3.5Kw x 4P	0.75Kw * 4P /0.25Kw * 6P
MAKER	LS		DONGA		YOUNG DONG	LK		SAMWHA		-		LK	LK

TITLE

HOISTING POWER CIRCUIT DIAGRAM

WORK NO

606

WORK NAME

DAD

380V

PROJECTION

SCALE

Q' TY

DRAWN

LEE.G.H

2010.08.06

CHECKED

REVIEWED


APPROVED

MODEL

CODE NO

CODE_NO

L K HOIST CO., LTD.

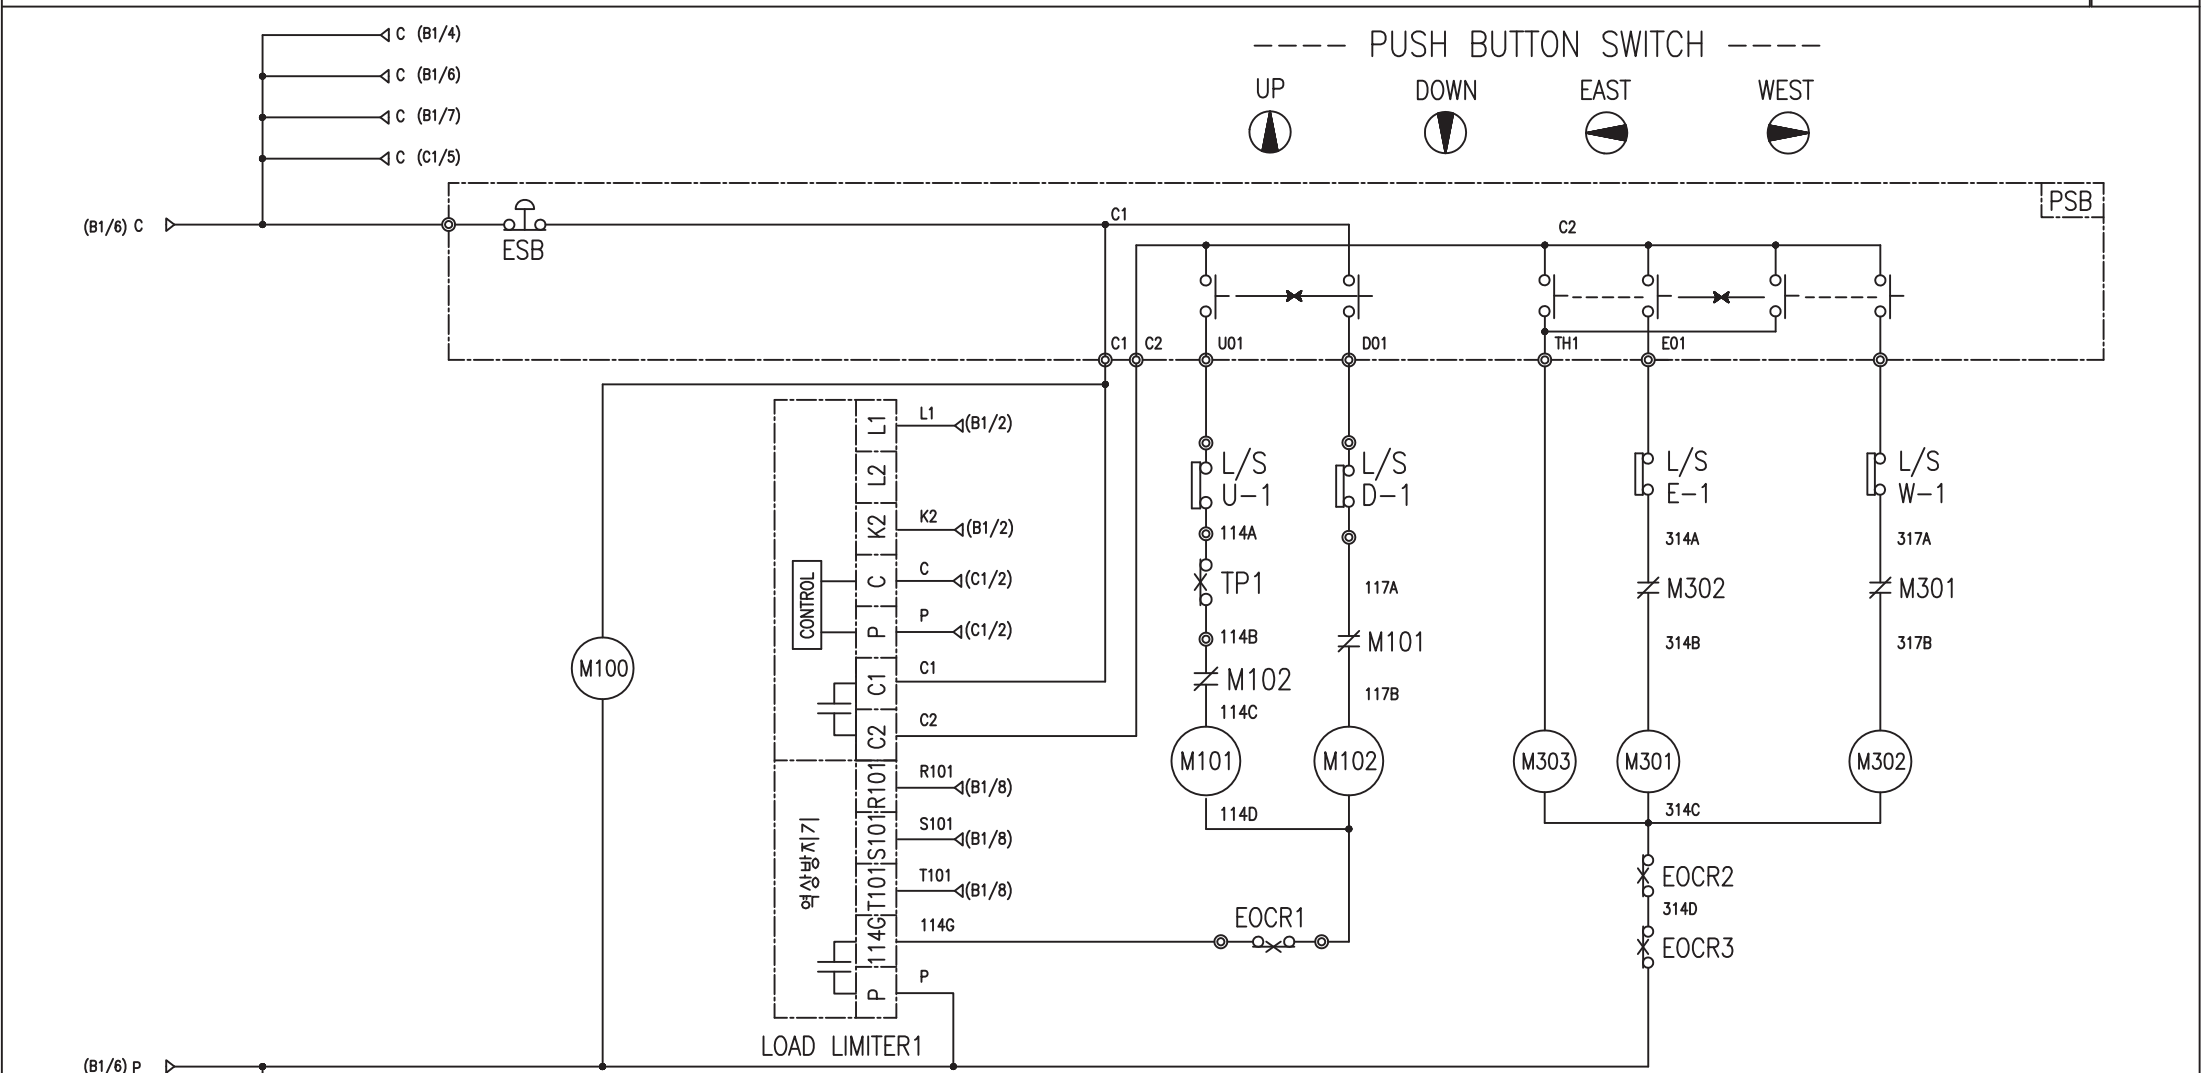

SPECIFICATION		LOAD LIMITER
SYMBOLS		LKDL601
DESCRIPTION		1A - 50A
MAKER		LK

1. : Mechanical Interlock

TITLE

HOISTING CONTROL CIRCUIT DIAGRAM

WORK NO

607

WORK NAME

DAD

220V, 380V, 440V, 460V, 480V

DRAWN

LEE.G.H

2010.08.06

CHECKED

REVIEWED

APPROVED

MODEL

CODE NO

CODE_NO

PROJECTION

SCALE

Q' TY

L K

L K HOIST CO., LTD.

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	3.5 - 4 - 38	
4. RATED POWER	3.5 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	380 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	1740 RPM	
12. FULL LOAD CURRENT	10 A	
13. STARTING CURRENT AT RATED VOLTAGE	49.2 A	
14. MINIMUM STARTING VOLTAGE	342 V	
15. EFFICIENCY AT 100% RATED LOAD	73 %	
16. POWER FACTOR AT 100% RATED LOAD	72.8 %	
17. STARTING TORQUE	242 %	
18. TYPE OF ENCLOSURE	전폐형(IP-54)	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75 - 4 - 38	
4. RATED POWER	0.75 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	380 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 RPM	
12. FULL LOAD CURRENT	2.77 A	
13. STARTING CURRENT AT RATED VOLTAGE	15.2 A	
14. MINIMUM STARTING VOLTAGE	342 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.5 - 6 - 38	
4. RATED POWER	0.5 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	380 V	60HZ
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	1.85 A	
13. STARTING CURRENT AT RATED VOLTAGE	10.5 A	
14. MINIMUM STARTING VOLTAGE	342 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75/0.25 - 4/12 - 38	
4. RATED POWER	0.75/0.25 KW × 4/12 P	
5. RATED VOLTAGE AND FREQUENCY	380 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 / 550 RPM	
12. FULL LOAD CURRENT	2.77 / 1.74 A	
13. STARTING CURRENT AT RATED VOLTAGE	15.3 / 9.57 A	
14. MINIMUM STARTING VOLTAGE	342 V	
15. EFFICIENCY AT 100% RATED LOAD	65 / 48 %	
16. POWER FACTOR AT 100% RATED LOAD	63 / 46 %	
17. STARTING TORQUE	249/ 245 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	