


L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

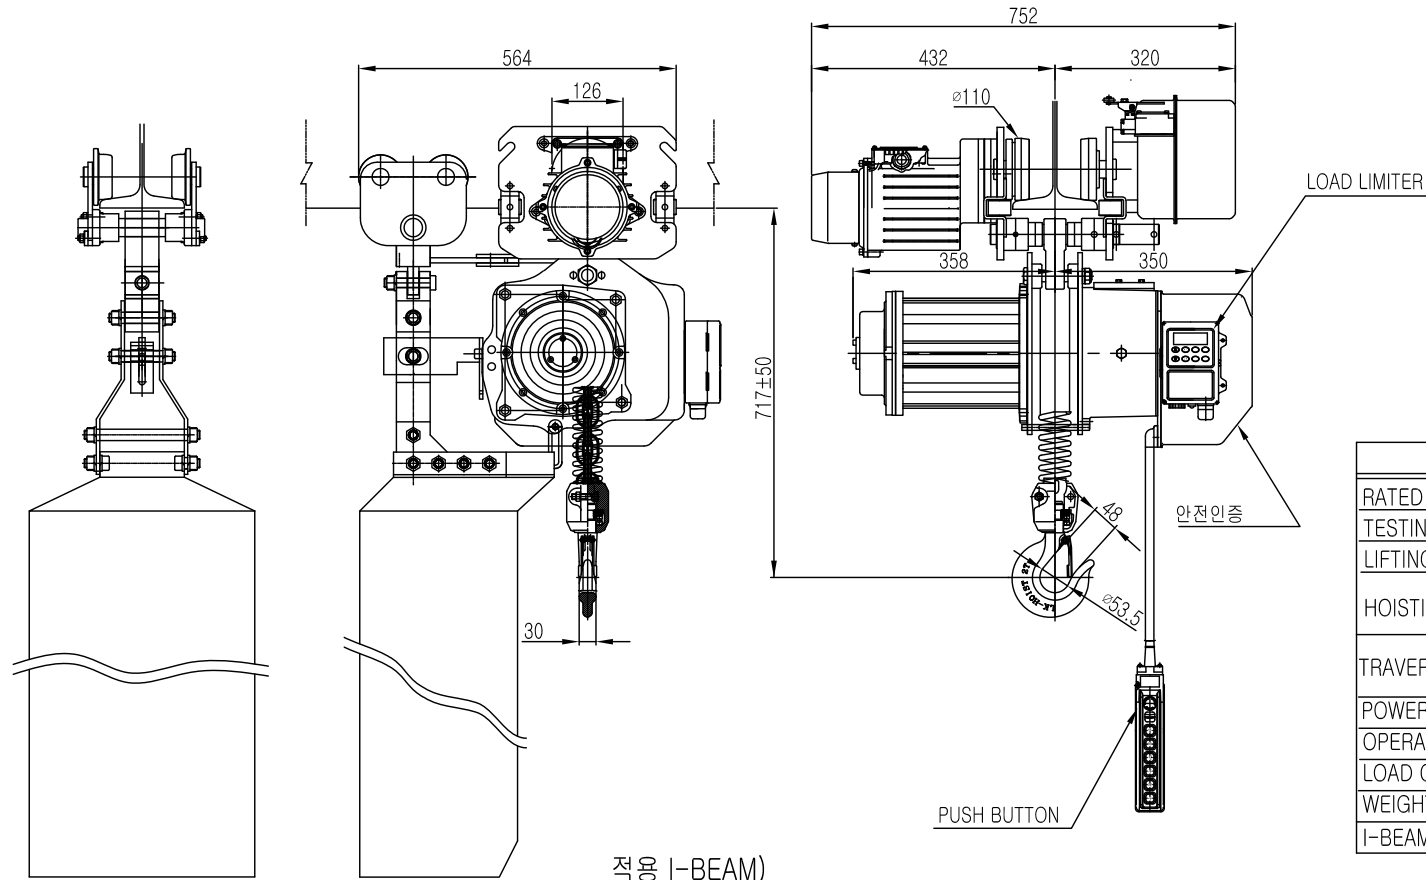


SPECIFICATION

		LK-EDAM-2S	
RATED LOAD (TON)		2.0	
TESTING LOAD (TON)		2.5	
LIFTING HEIGHT (M)		50	
HOISTING	SPEED (M/MIN)	8.1	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	21	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT (KG)		265KG	
I-BEAM 적용폭		100 ~ 190MM	

적용 I-BEAM)



- 1) 지점간 거리: I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

TITLE ELECTRIC CHAIN HOIST LK-EDAM-2S					PROJECTION 	
WORK NO		WORK NAME			SCALE	Q' TY
4		LK-EDAM-2S				
					1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE NO		
2013.11.05						
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

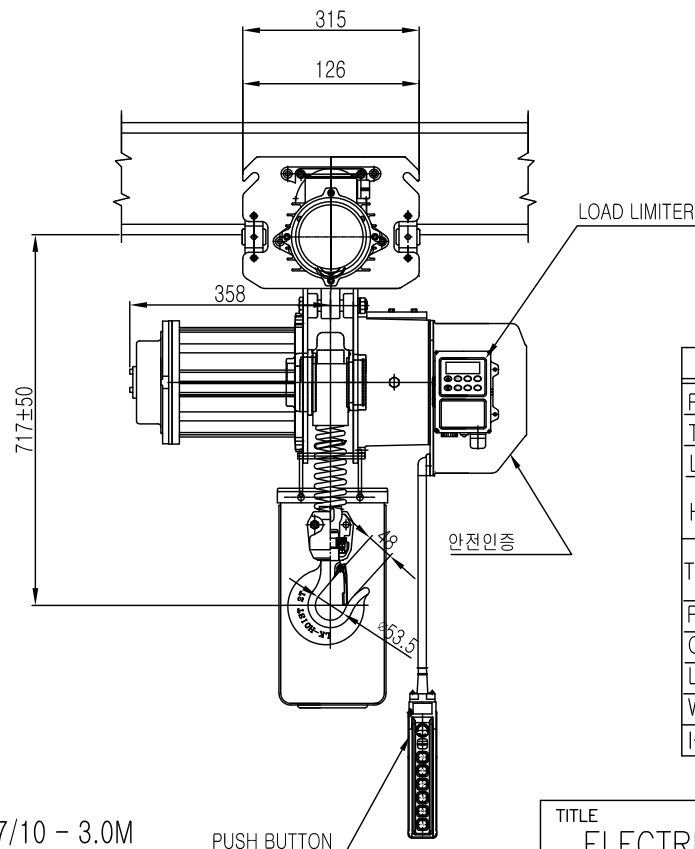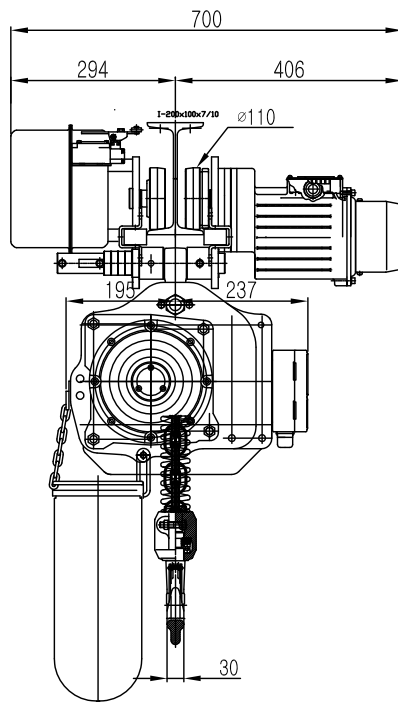

SPECIFICATION

		LK-EDAM-2S	
RATED LOAD (TON)		2.0	
TESTING LOAD (TON)		2.5	
LIFTING HEIGHT (M)		50	
HOISTING	SPEED (M/MIN)	8.1	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	21	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT (KG)		265KG	
I-BEAM 적용폭		100 ~ 190MM	

적용 I-BEAM)


- 지점간 거리: I-200X100X7/10 - 3.0M
- 지점간거리 : I-250X125X7.5/12.5-5.0M
- 지점간거리 : I-300X150X10/18.5-7.5M
- 지점간거리 : I-450X175X13/26-12M
- 지점간거리 : I-600X190X13/25-15M

TITLE				PROJECTION	
ELECTRIC CHAIN HOIST LK-EDAM-2S					
WORK NO	WORK NAME			SCALE	Q' TY
4	LK-EDAM-2S			1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO	
김 창 기				CODE NO	
2013.11.05					
L K HOIST CO., LTD.					

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED


L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

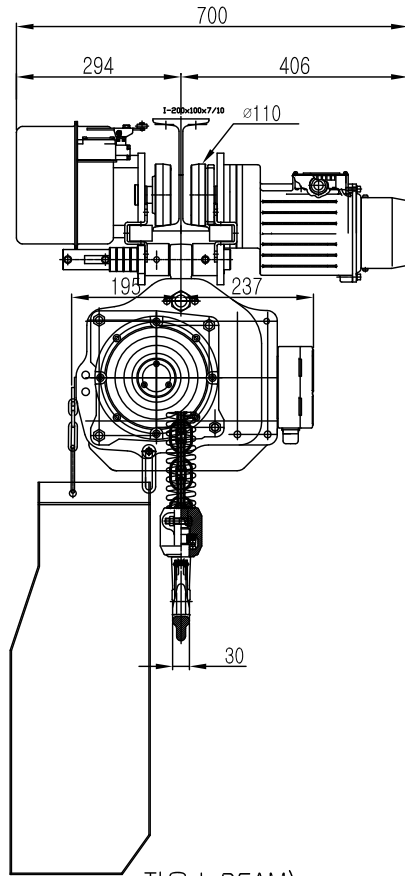

적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 3.0M
- 2) 지점간거리 : I-250X125X7.5/12.5-5.0M
- 3) 지점간거리 : I-300X150X10/18.5-7.5M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

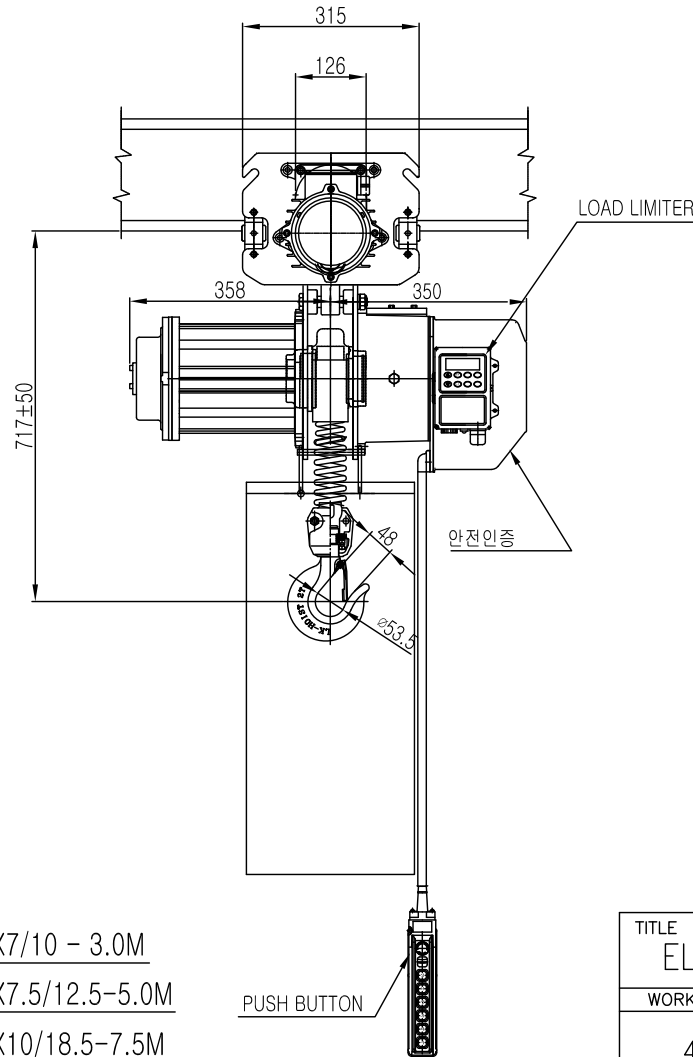

SPECIFICATION

		LK-EDAM-2S	
RATED LOAD (TON)		2.0	
TESTING LOAD (TON)		2.5	
LIFTING HEIGHT (M)		50	
HOISTING	SPEED (M/MIN)	8.1	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	21	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460,480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT (KG)		265KG	
I-BEAM 적용폭		100 ~ 190MM	

TITLE				PROJECTION	
ELECTRIC CHAIN HOIST LK-EDAM-2S				 	
WORK NO		WORK NAME			
4		LK-EDAM-2S		SCALE	Q' TY
				1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO	
김 창 기				CODE NO	
2013.11.05					



L K HOIST CO., LTD.

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED