


L K HOIST

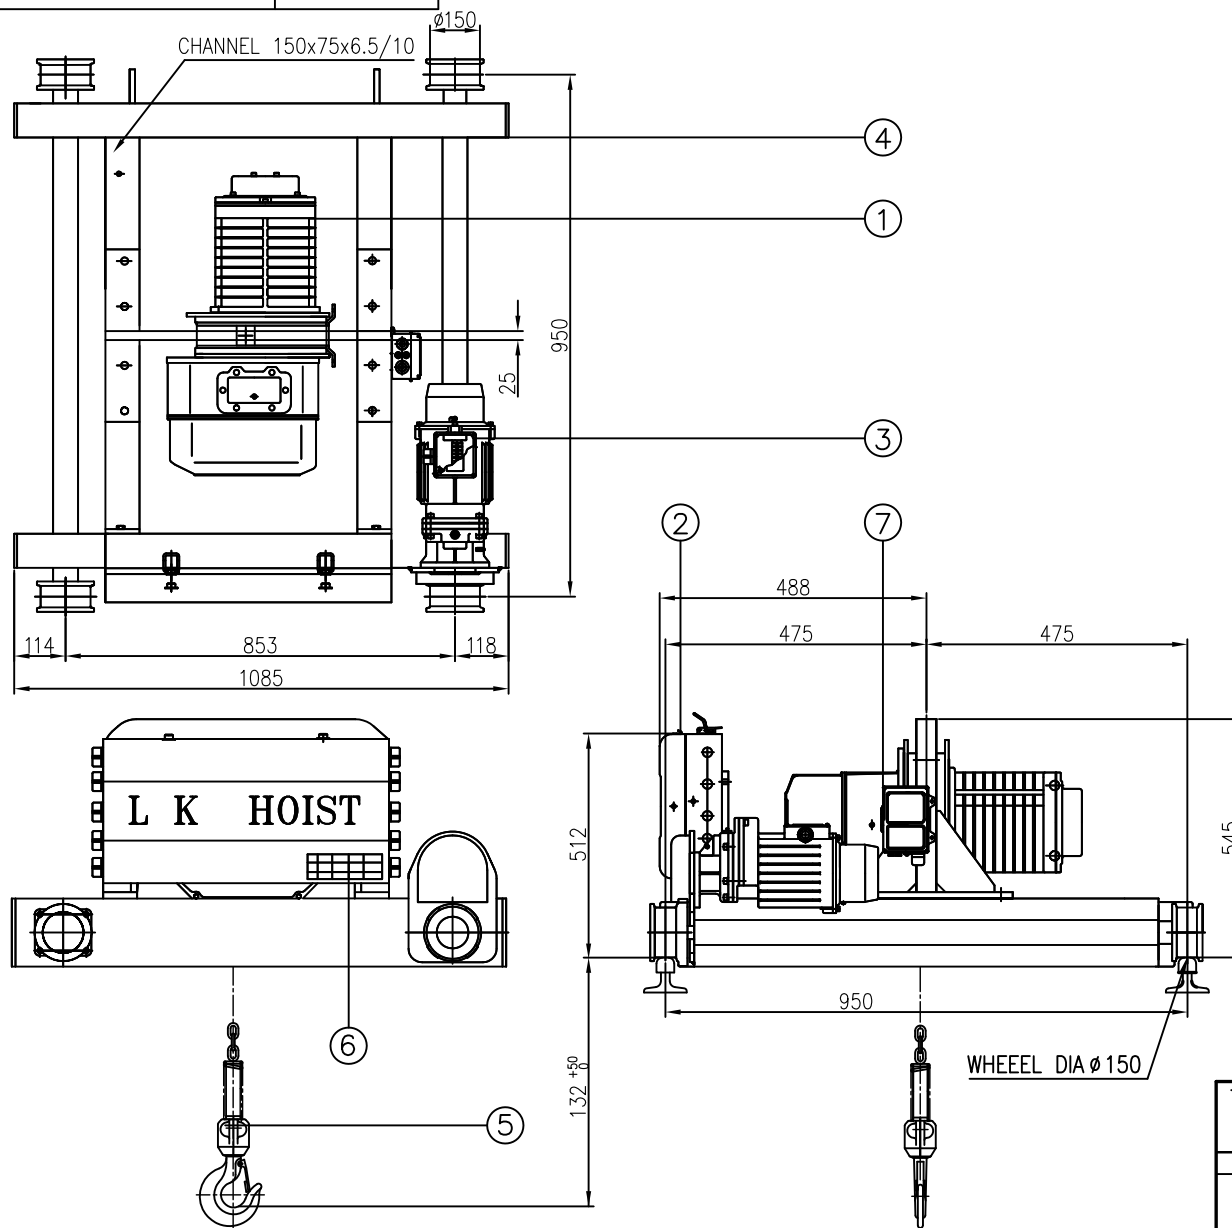

	DESCRIPTION	SIZE	MAT'	REMARKS
1	HOISTING MOTOR ASS'Y		1	
2	HOISTING CONTROL ASS'Y		1	
3	GEARD MOTOR ASS'Y		1	
4	GRAB PART ASS'Y		1	
5	BOTTOM HOOK ASS'Y		1	
6	NAME PLATE		1	
7	LOAD LIMITEER		1	

SPECIFICATION				
RATED LOAD		1.9 TON		
TESTING LOAD		2.375 TON		
LIFTING HEIGHT		30 M		
HOISTING	SPEED/MOTOR	8.1m/min	3.5KW(4P)	
TRAVERSING	SPEED/MOTOR	24m/min	0.75KW(4P)	
		16m/min	0.5KW(6P)	
		17/5.4m/min * 0.75/0.25kw * 4/12p		
POWER SUPPLY		AC220,380,440,460V,480Vx 3ø x 60 Hz		
OPERATING METHOD		P.B type ON . FL		
WIEGHT		333kg		
RAIL		15KG/M		
CHAIN 사양		ø11.2 X 34(1줄)		
RAIL GgeR		950		

NOTE)

1.점검 설비를 갖출 것.

2.인허가 서류를 완성 검사시 제출 할 것.

TITLE					PROJECTION	
DAD-1.9S CHAIN HOIST					 	
WORK NO		WORK NAME				
		LK-DAD-1.9S			SCALE	Q' TY
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE NO		
2010.09.16						


가공별 치수	3-6	6-30	30-120	120-315	315-1000
선	±0.1	±0.2	±0.3	±0.5	±0.8
구멍간 거리	±0.1	±0.2	±0.3	±0.5	±0.8

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED



L K HOIST CO., LTD.

L K HOIST-

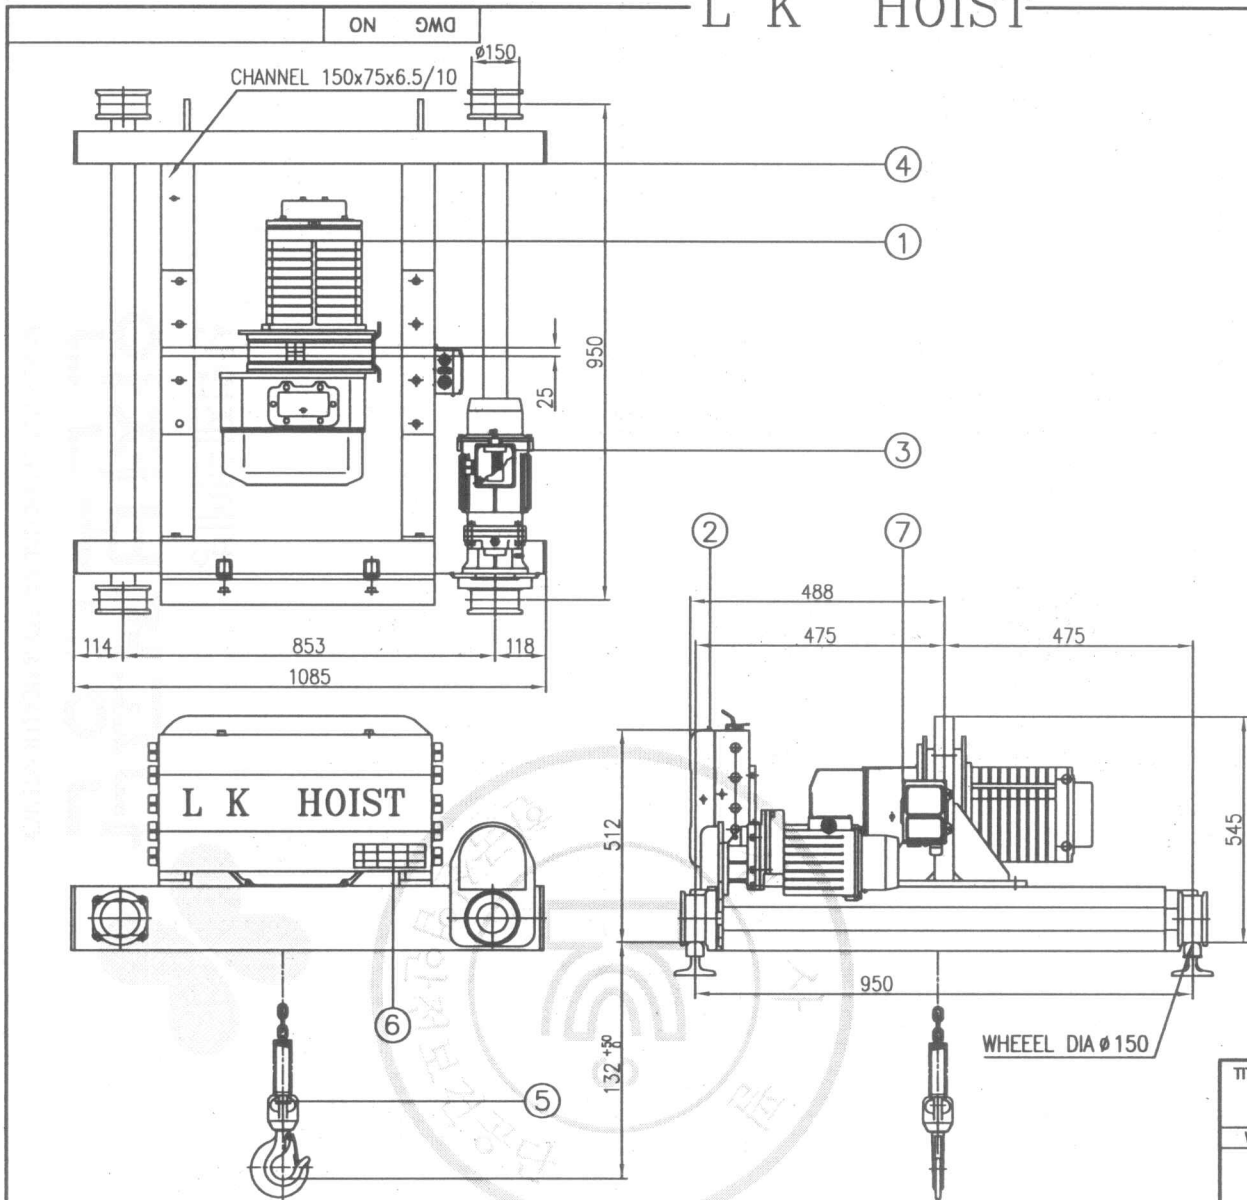

	DESCRIPTION	SIZE	MAT'	REMARKS
1	HOISTING MOTOR ASS'Y		1	
2	HOISTING CONTROL ASS'Y		1	
3	GEARD MOTOR ASS'Y		1	
4	GRAB PART ASS'Y		1	
5	BOTTOM HOOK ASS'Y		1	
6	NAME PLATE		1	
7	LOAD LIMITEER		1	

SPECIFICATION			
RATED LOAD		1.9 TON	
TESTING LOAD		2.375 TON	
LIFTING HEIGHT		30 M	
HOISTING	SPEED/MOTOR	8.1m/min	3.5KW(4P)
		24m/min	0.75KW(4P)
TRAVERSING	SPEED/MOTOR	16m/min	0.5KW(6P)
		17/5.4m/min * 0.75/0.25kw * 4/12p	
POWER SUPPLY		AC220,380,440,460V,480Vx 3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
WIEGHT		333kg	
RAIL		15KG/M	
CHAIN 사양		ø11.2 X 34(1#)	
RAIL GgeR		950	

NOTE)

- 1.점검 설비를 갖추는 것.
- 2.인허가 서류를 완성 검사시 제출 할 것.

TITLE		DAD-1.9S CHAIN HOIST				PROJECTION	
WORK NO		WORK NAME					
		LK-DAD-1.9S				SCALE	
						Q' TY	
DRAWN		CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기					CODE NO		
2010.09.16							
 L K HOIST CO., LTD.							

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED APPROVED

기공별	치수	3-6	6-30	30-120	120-315	315-1000
선	삭					
구명간	거리	±0.1	±0.2	±0.3	±0.5	±0.8