



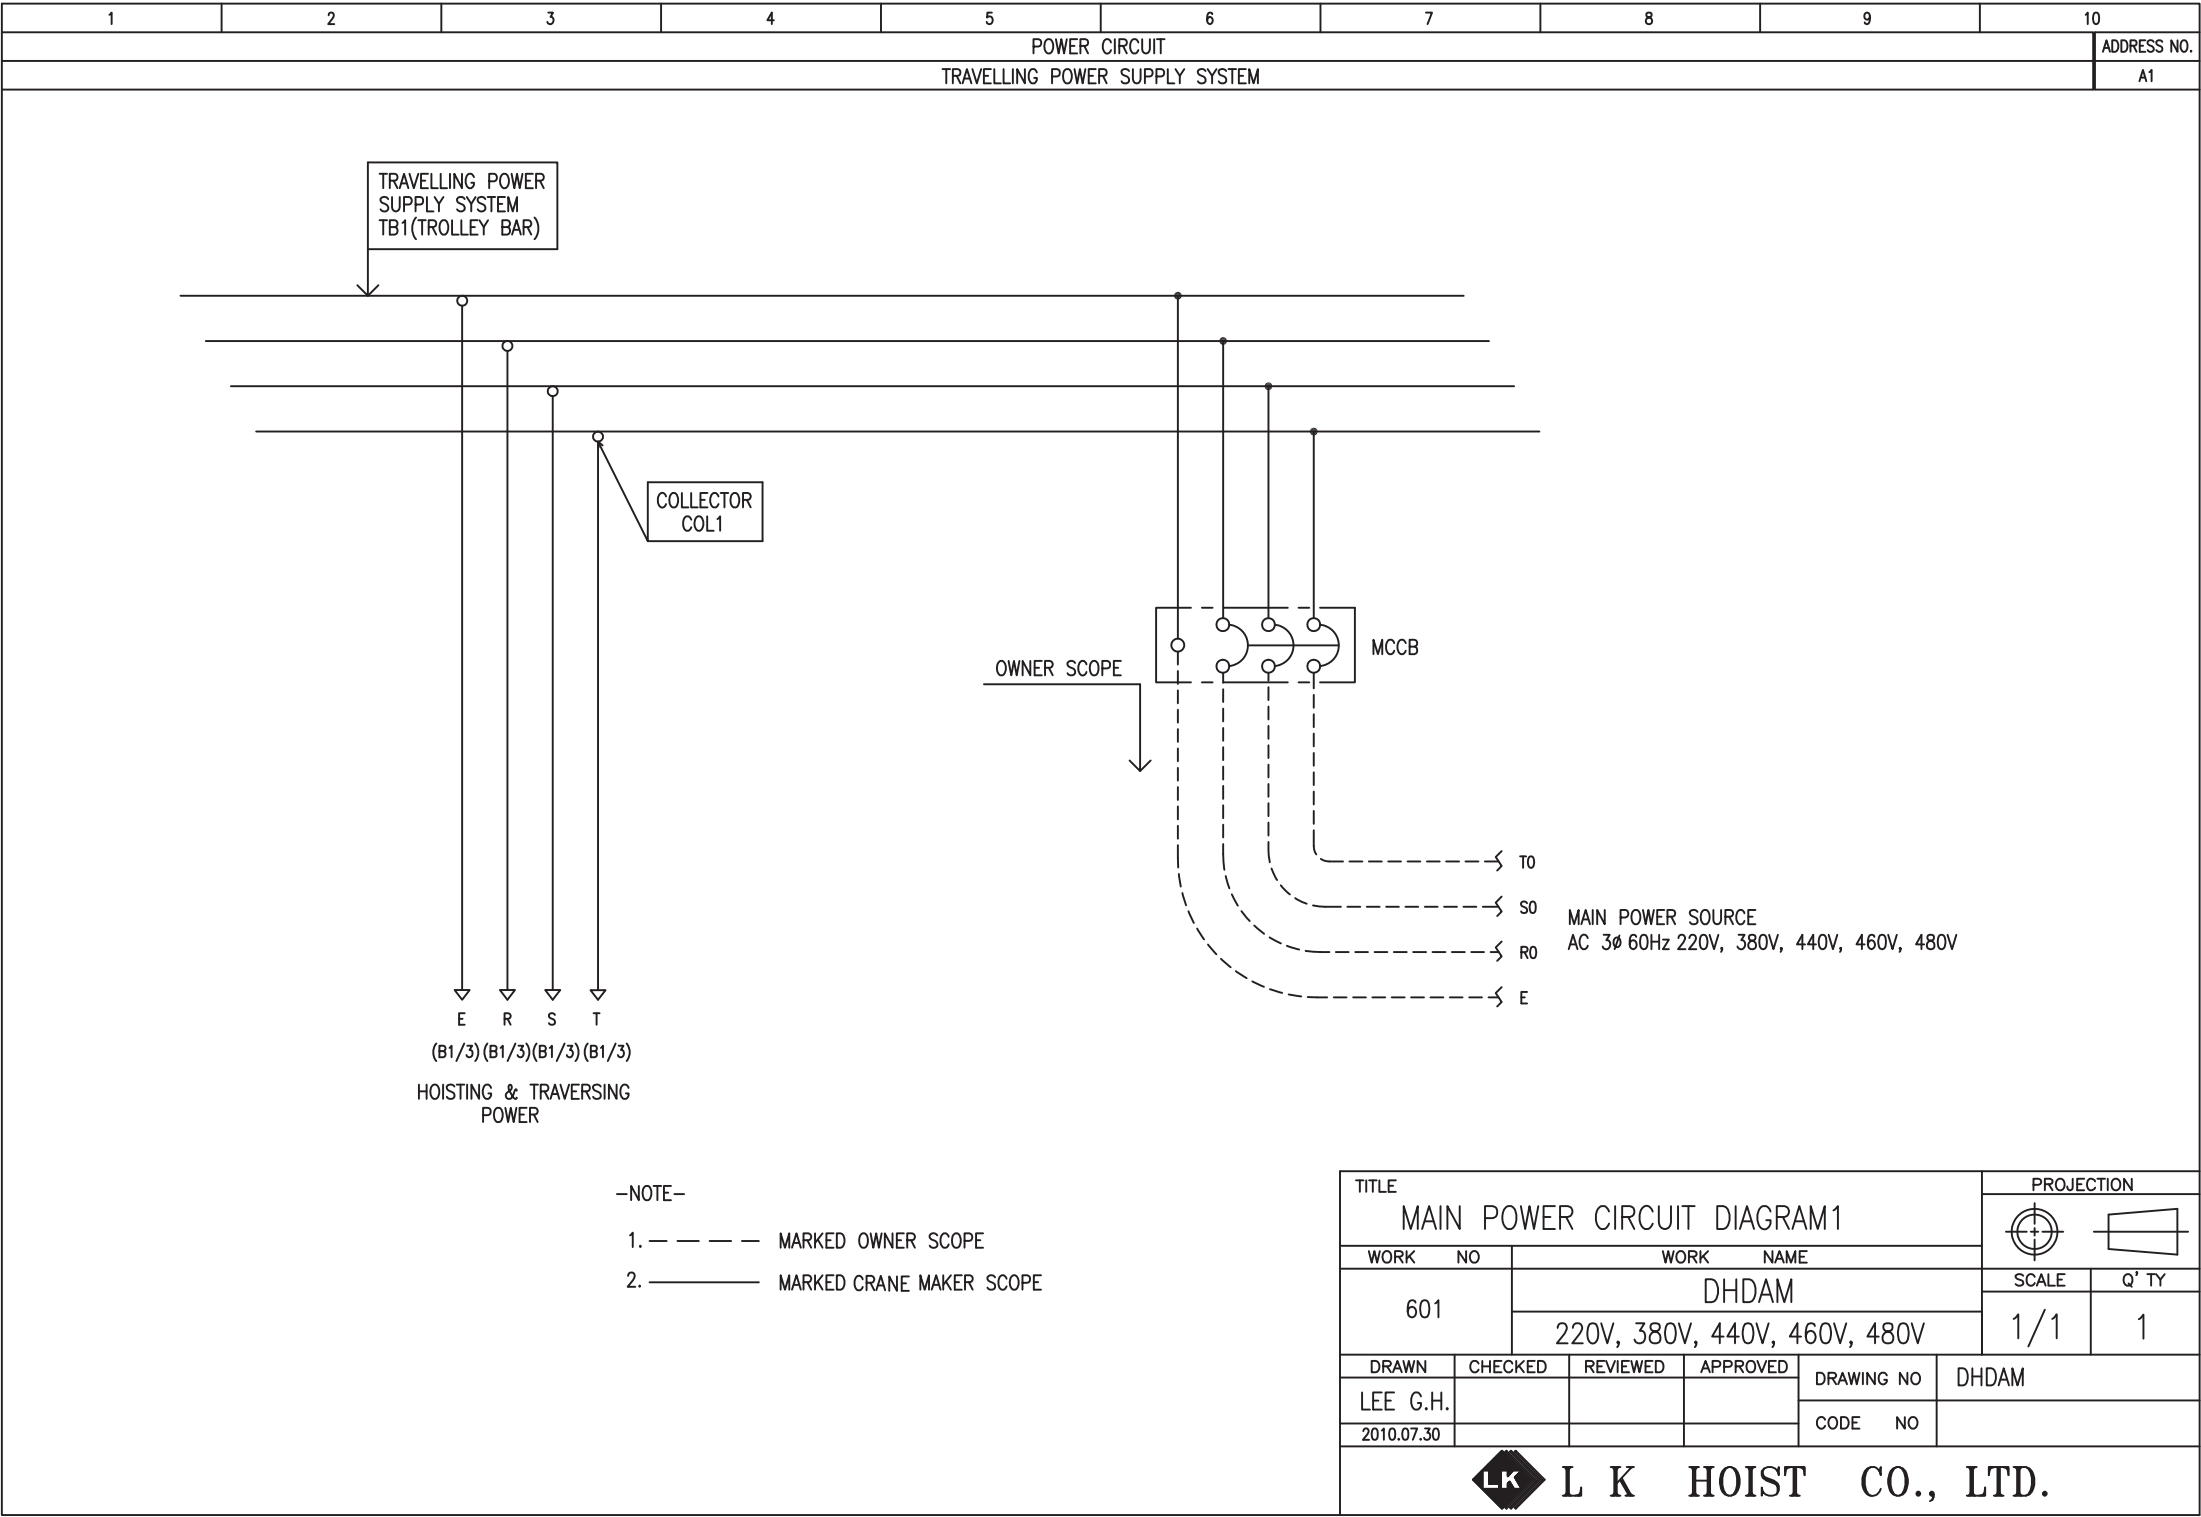


1	2	3	4	5	6	7	8	9	10		
POWER CIRCUIT					CONTROL CIRCUIT					ADDRESS NO.	B1

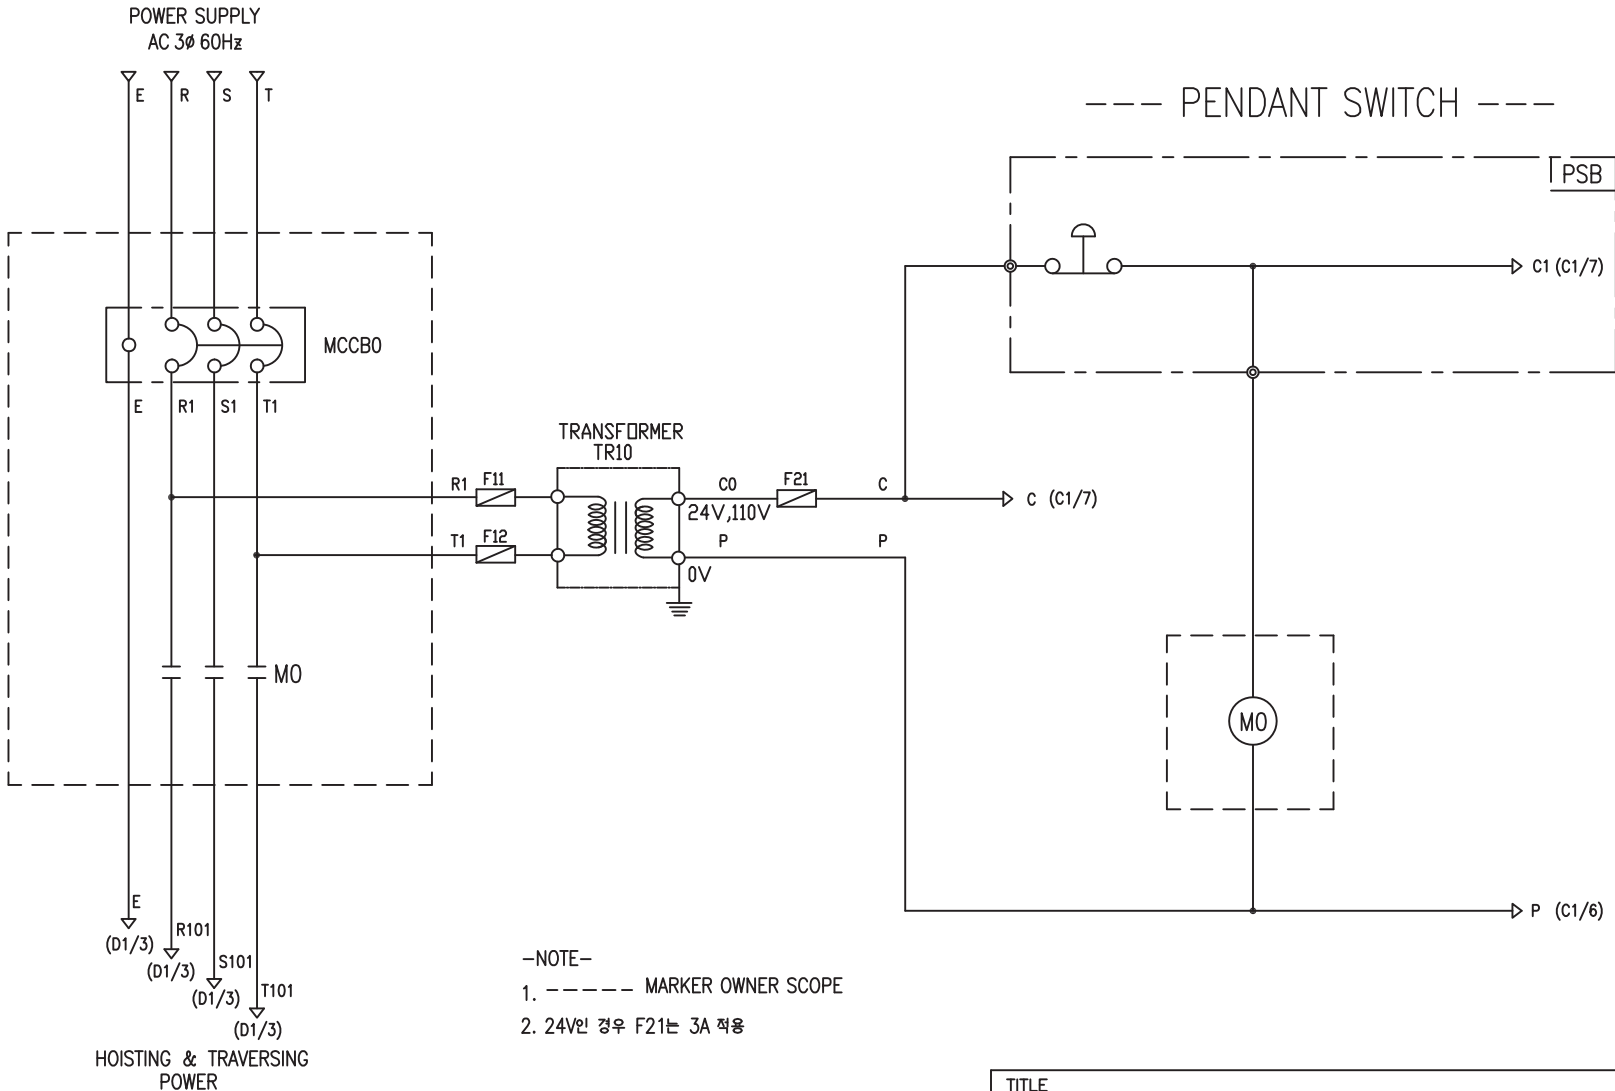


-NOTE-

1. ----- MARKER OWNER SCOPE
2. 24V인 경우 F21는 3A 적용

SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACT		TRANSFORMER	FUSE
SYMBOLS	MCCB0		M0		TR10	F11, F12, F21
DESCRIPTION	220V	30A	GMC22	DMC-22	30VA	1A
	380V	15A				
	440V	15A				
	460V	15A				
	480V	15A				
MAKER	LS		LS	DONGA	LK	—

TITLE					PROJECTION	
MAIN POWER & CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK			NAME	
602		DHDAM			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	DHDAM	
LEE.G.H				CODE	NO	
2010.07.30						
 L K HOIST CO., LTD.						

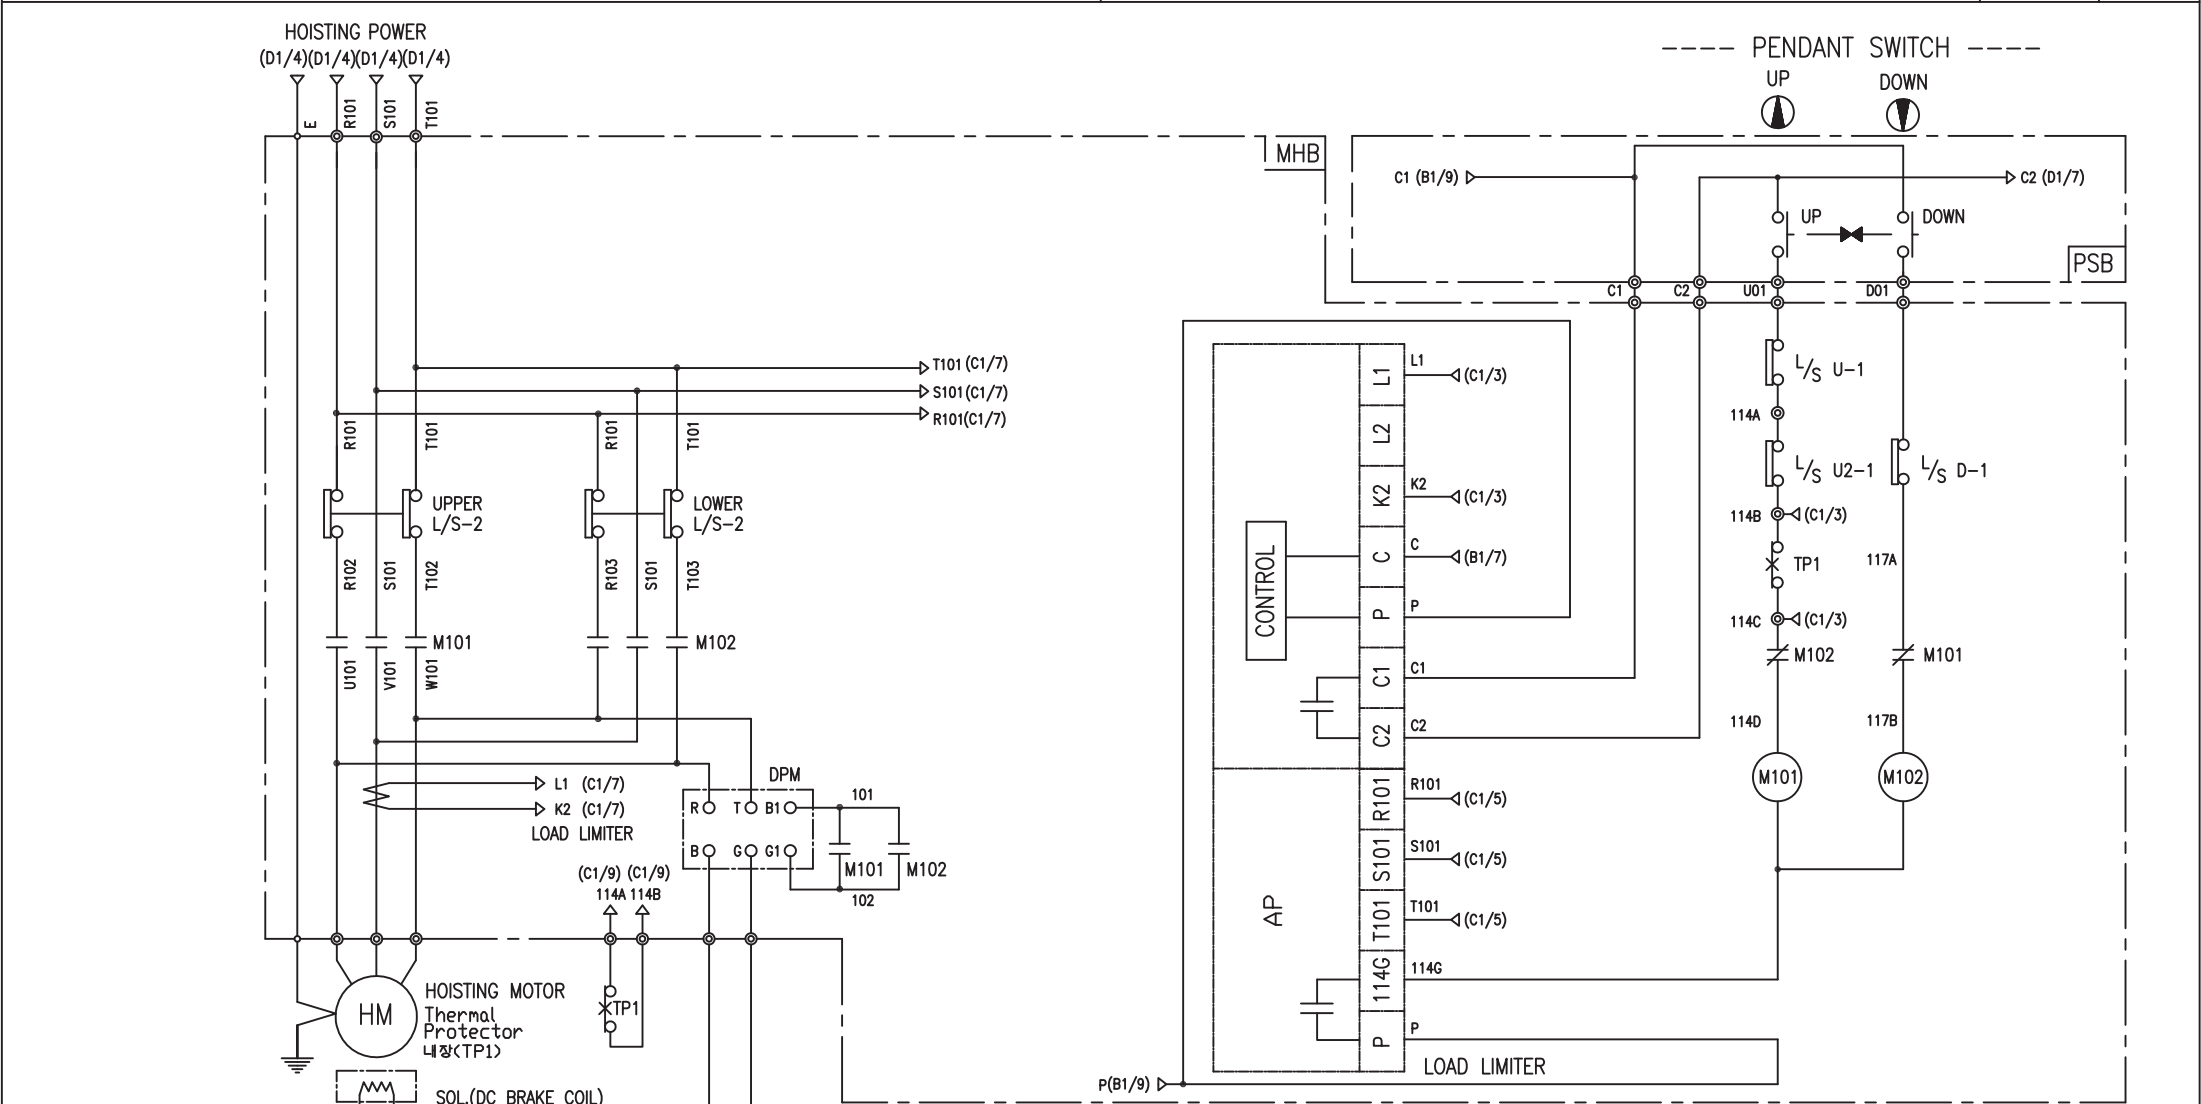

SPECIFICATION	MAGNET CONTACT		LOAD LIMITER	SILICON RECTIFIER				Thermal Protector	HOIST MOTOR
SYMBOLS	M101, M102		—	DPM				TP1	HM
DESCRIPTION	DMC-12	GMC-12	LKDL-601	AC220V	AC440V	AC460V	AC480V	17AM032	1.8Kw * 4P
				DC99V	DC198V	DC207V	DC216V		
MAKER	DONG-A	LS	LK	LK				Texas Instruments	LK

TITLE

HOIST POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

603

WORK NAME

DHDAM

220V, 440V, 460V, 480V

PROJECTION

SCALE

1/1

Q' TY

1

DRAWN

LEE.G.H

2010.07.30

CHECKED

REVIEWED


APPROVED

MODEL

DHDAM

LK

L K HOIST CO., LTD.

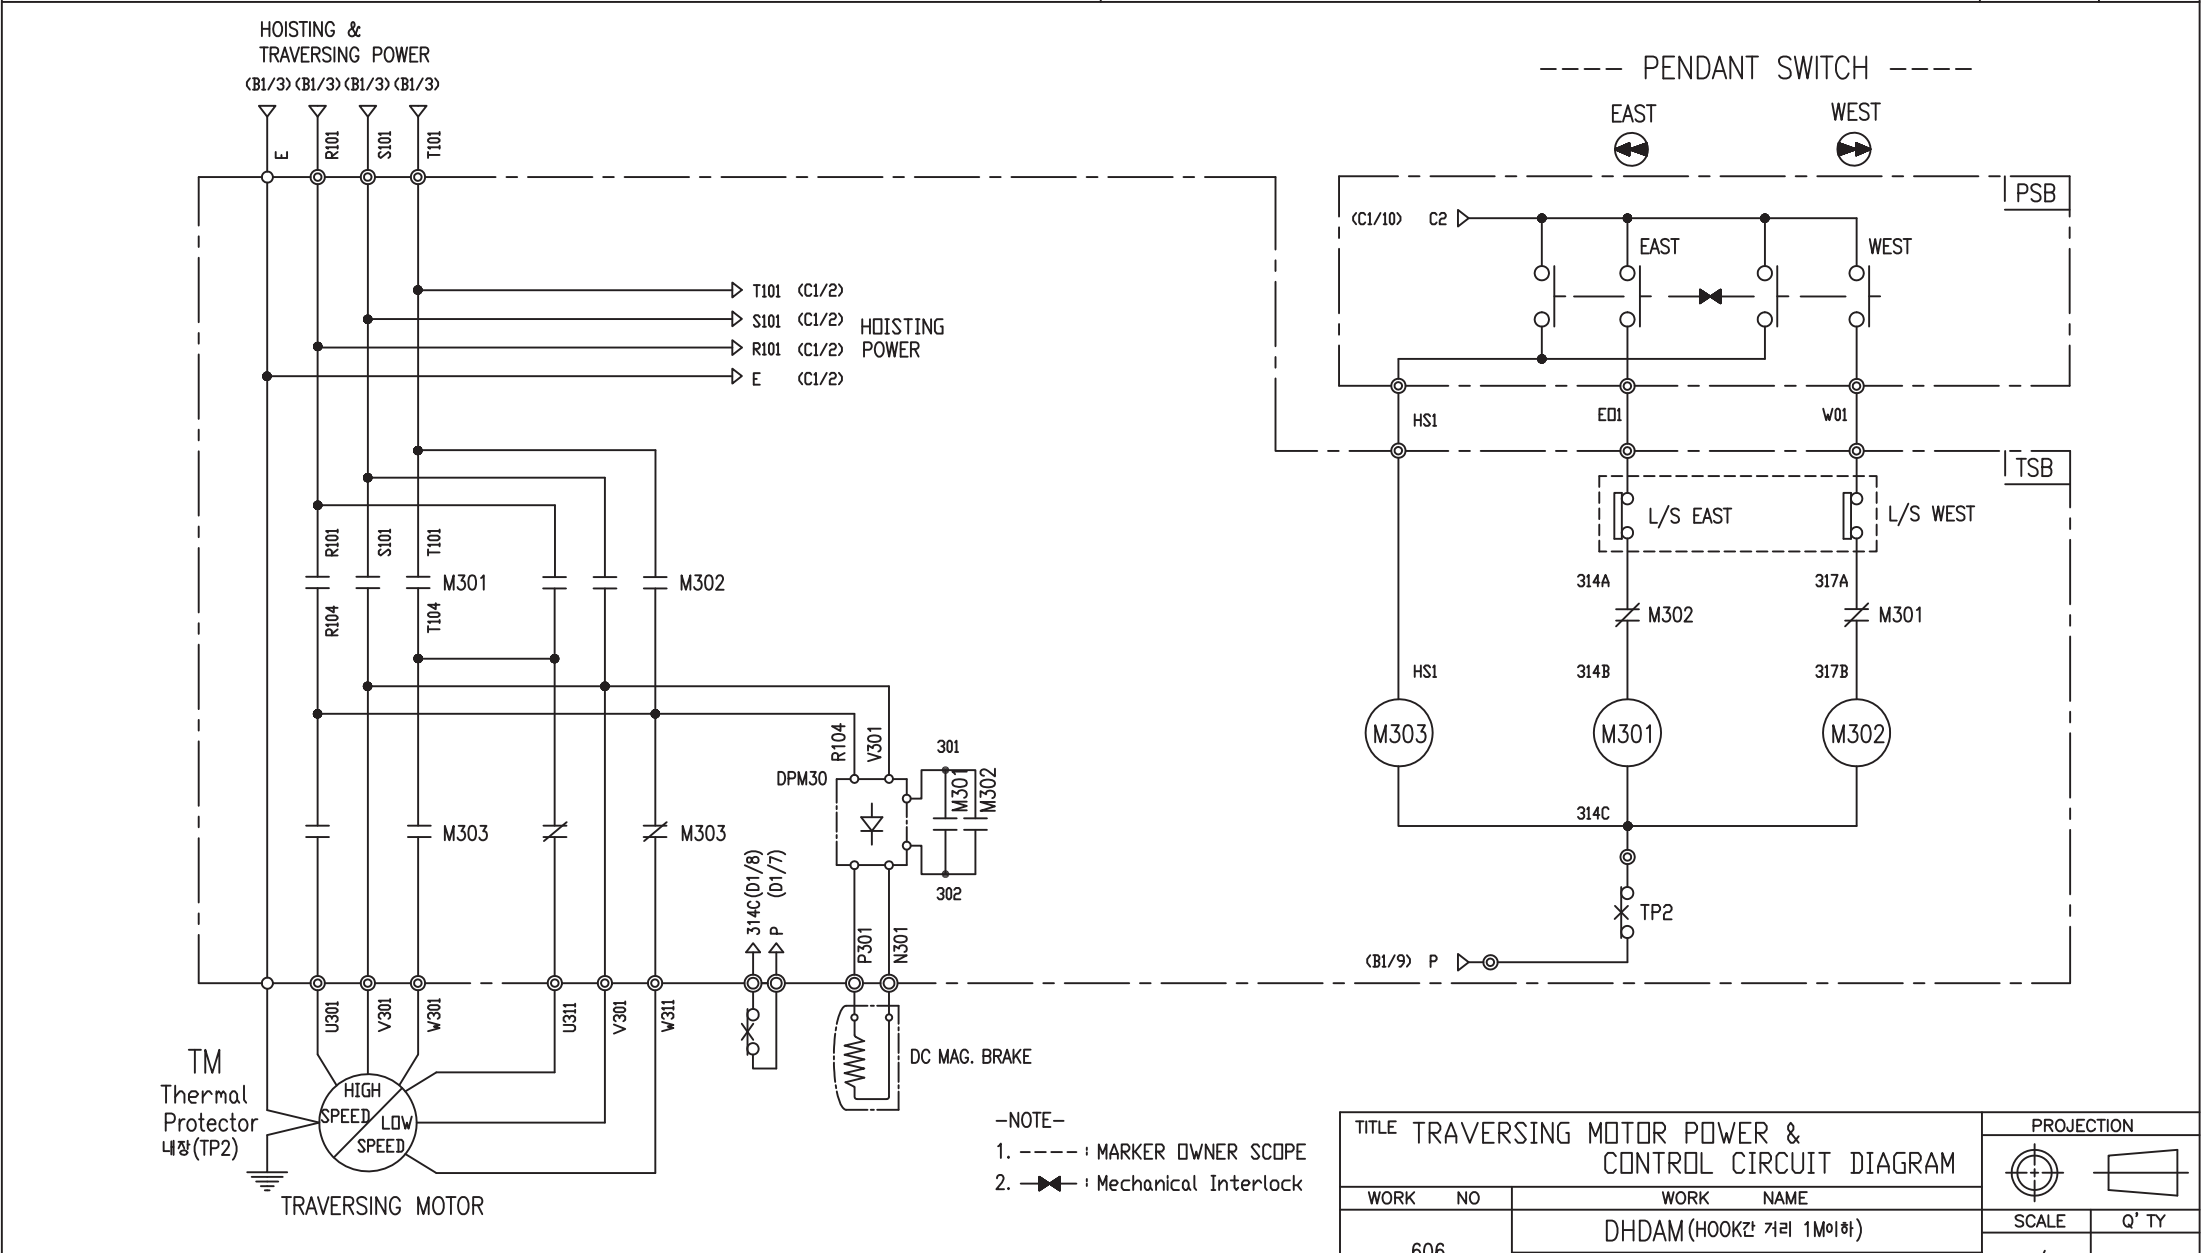

SPECIFICATION	MAGNET CONTACT		Thermal Protector	SILICON RECTIFIER					TRAVERSING MOTOR
SYMBOLS	M301, M302, M303		TP2	DPM30					TM
DESCRIPTION	GMC12	DMC12	17AM032	AC220V	AC380V	AC440V	AC460V	AC480V	0.4/0.14KW ※4/12P
				DC99V	DC171V	DC198V	DC207V	DC216V	
MAKER	LS	DONGA	Texas Instruments	LK					LK

TITLE

TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

606

WORK NAME

DHDAM(HOOK간 거리 1M이하)

220V, 380V, 440V, 460V, 480V

PROJECTION

SCALE

1/1

Q' TY

1

DRAWN

LEE.G.H

2010.07.30

CHECKED

REVIEWED

APPROVED


MODEL

DHDAM

CODE NO

LK

L K HOIST CO., LTD.

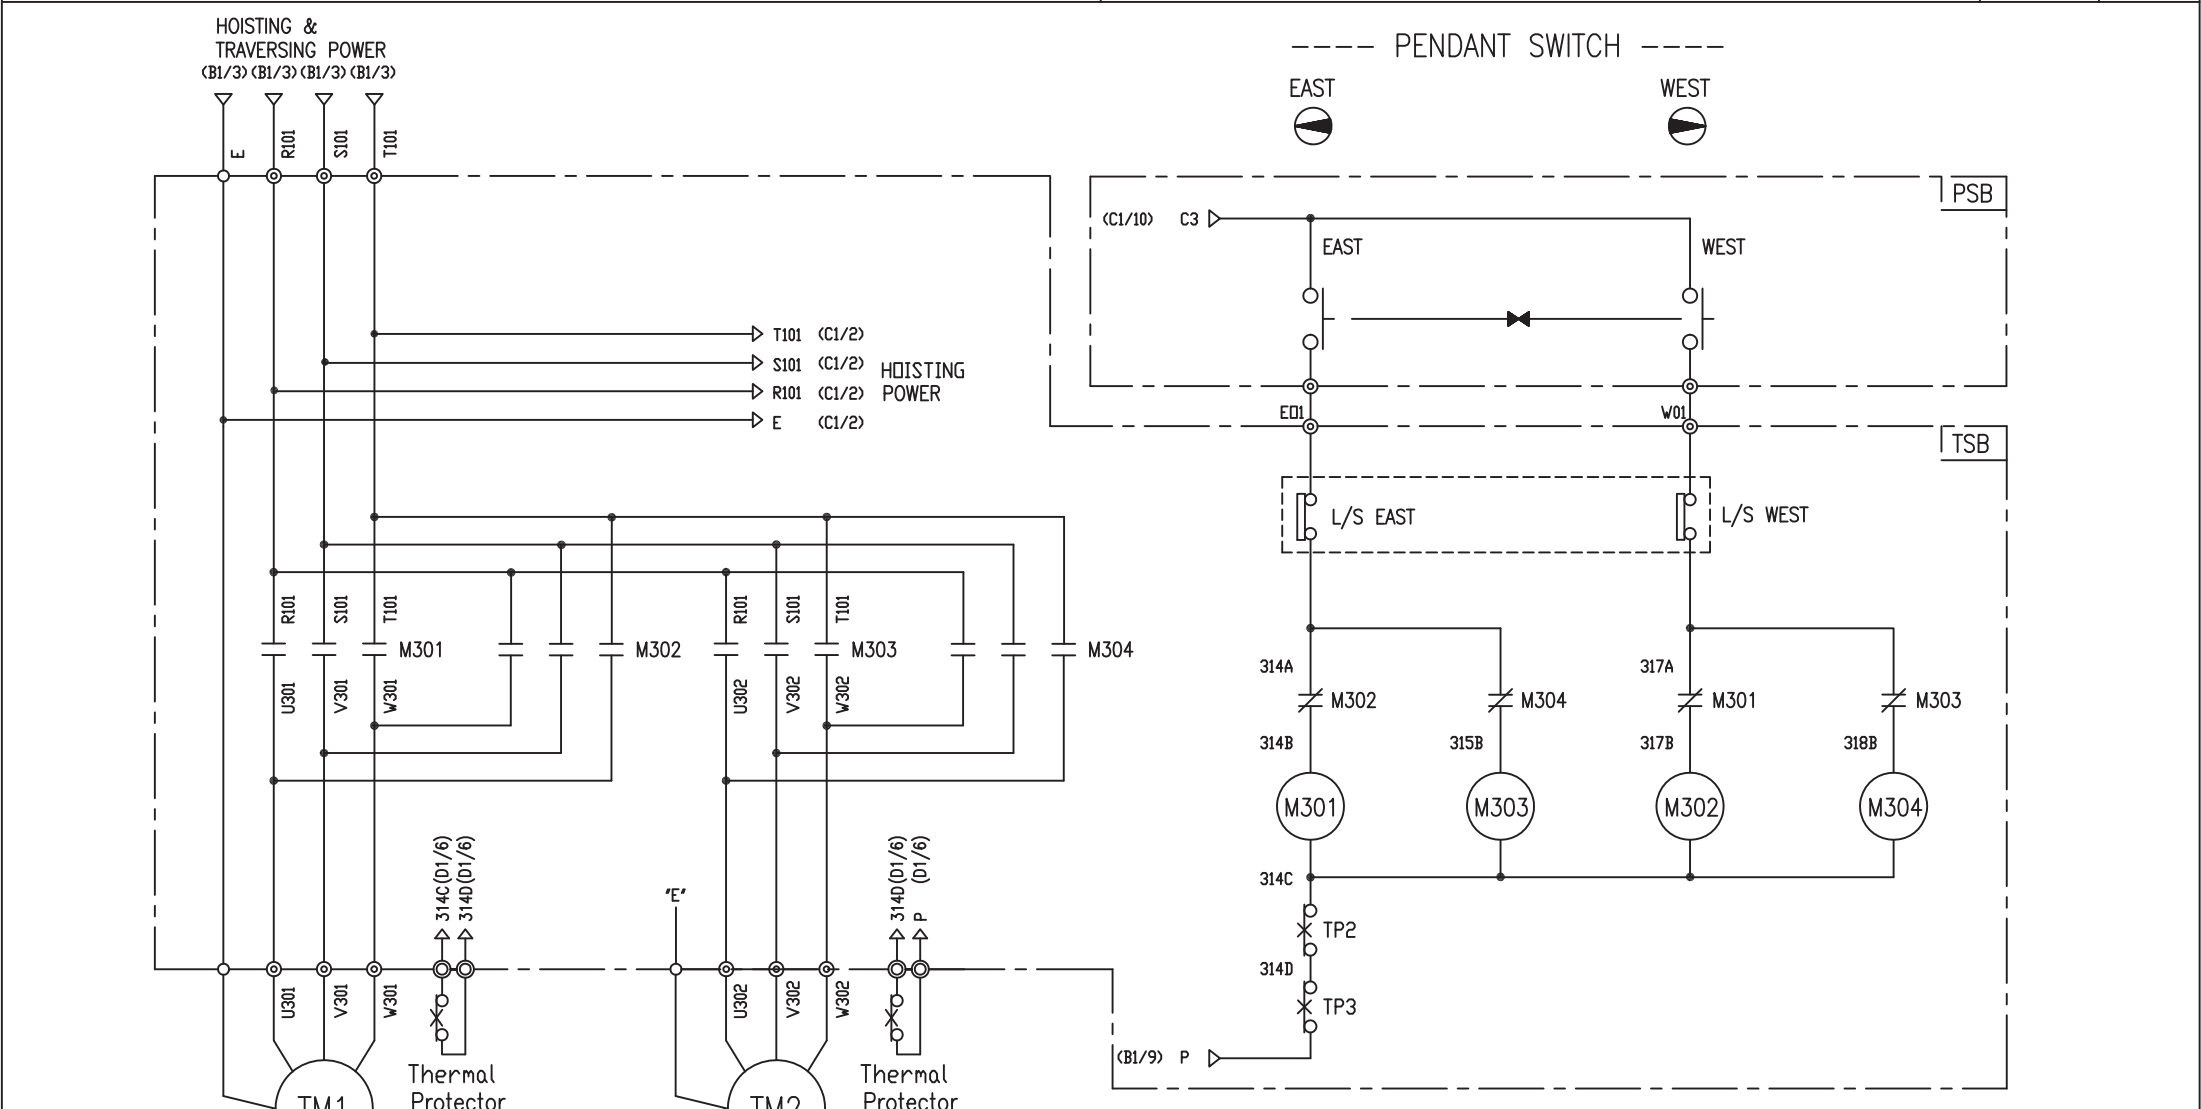

TM1

TRAVERSING MOTOR
MECHANICAL BRAKE

TM2

TRAVERSING MOTOR
MECHANICAL BRAKE

314C (01/6)

314D (01/6)

TP2

TP3

E'

U302

V302

W302

314D (01/6)

314D (01/6)

P

P

TP2

TP3

(B1/9) P

----- PENDANT SWITCH -----

EAST

WEST

C1/10

C3

EAST

WEST

ED1

W01

PSB

TSB

L/S EAST

L/S WEST

314A

314B

314C

314D

M302

M303

315B

TP2

TP3

317A

317B

318B

M301

M304

318B

1. ----- : MARKER OWNER SCOPE

2. ----- : Mechanical Interlock

TITLE TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM

WORK NO 607

WORK NAME DHDAM (HOOK한 거리 1M이상)

220V, 380V, 440V, 460V, 480V

PROJECTION

SCALE 1/1

Q' TY 1

DRAWN LEE.G.H

CHECKED

REVIEWED

APPROVED

2010.07.30


MODEL DHDAM

CODE NO

LK L K HOIST CO., LTD.

SPECIFICATION	MAGNET CONTACT	Thermal Protector	TRAVERSING MOTOR
SYMBOLS	M301, M302, M303, M304	TP2, TP3	TM1, TM2
DESCRIPTION	GMC12 DMC12	17AM032	0.4KW *4P(2set) 0.3KW *6P(2set)
MAKER	LS DONGA	Texas Instruments	LK


1	2	3	4	5	6	7	8	9	10		
TRAVERSING POWER CIRCUIT					TRAVERSING CONTROL CIRCUIT					ADDRESS NO.	D1

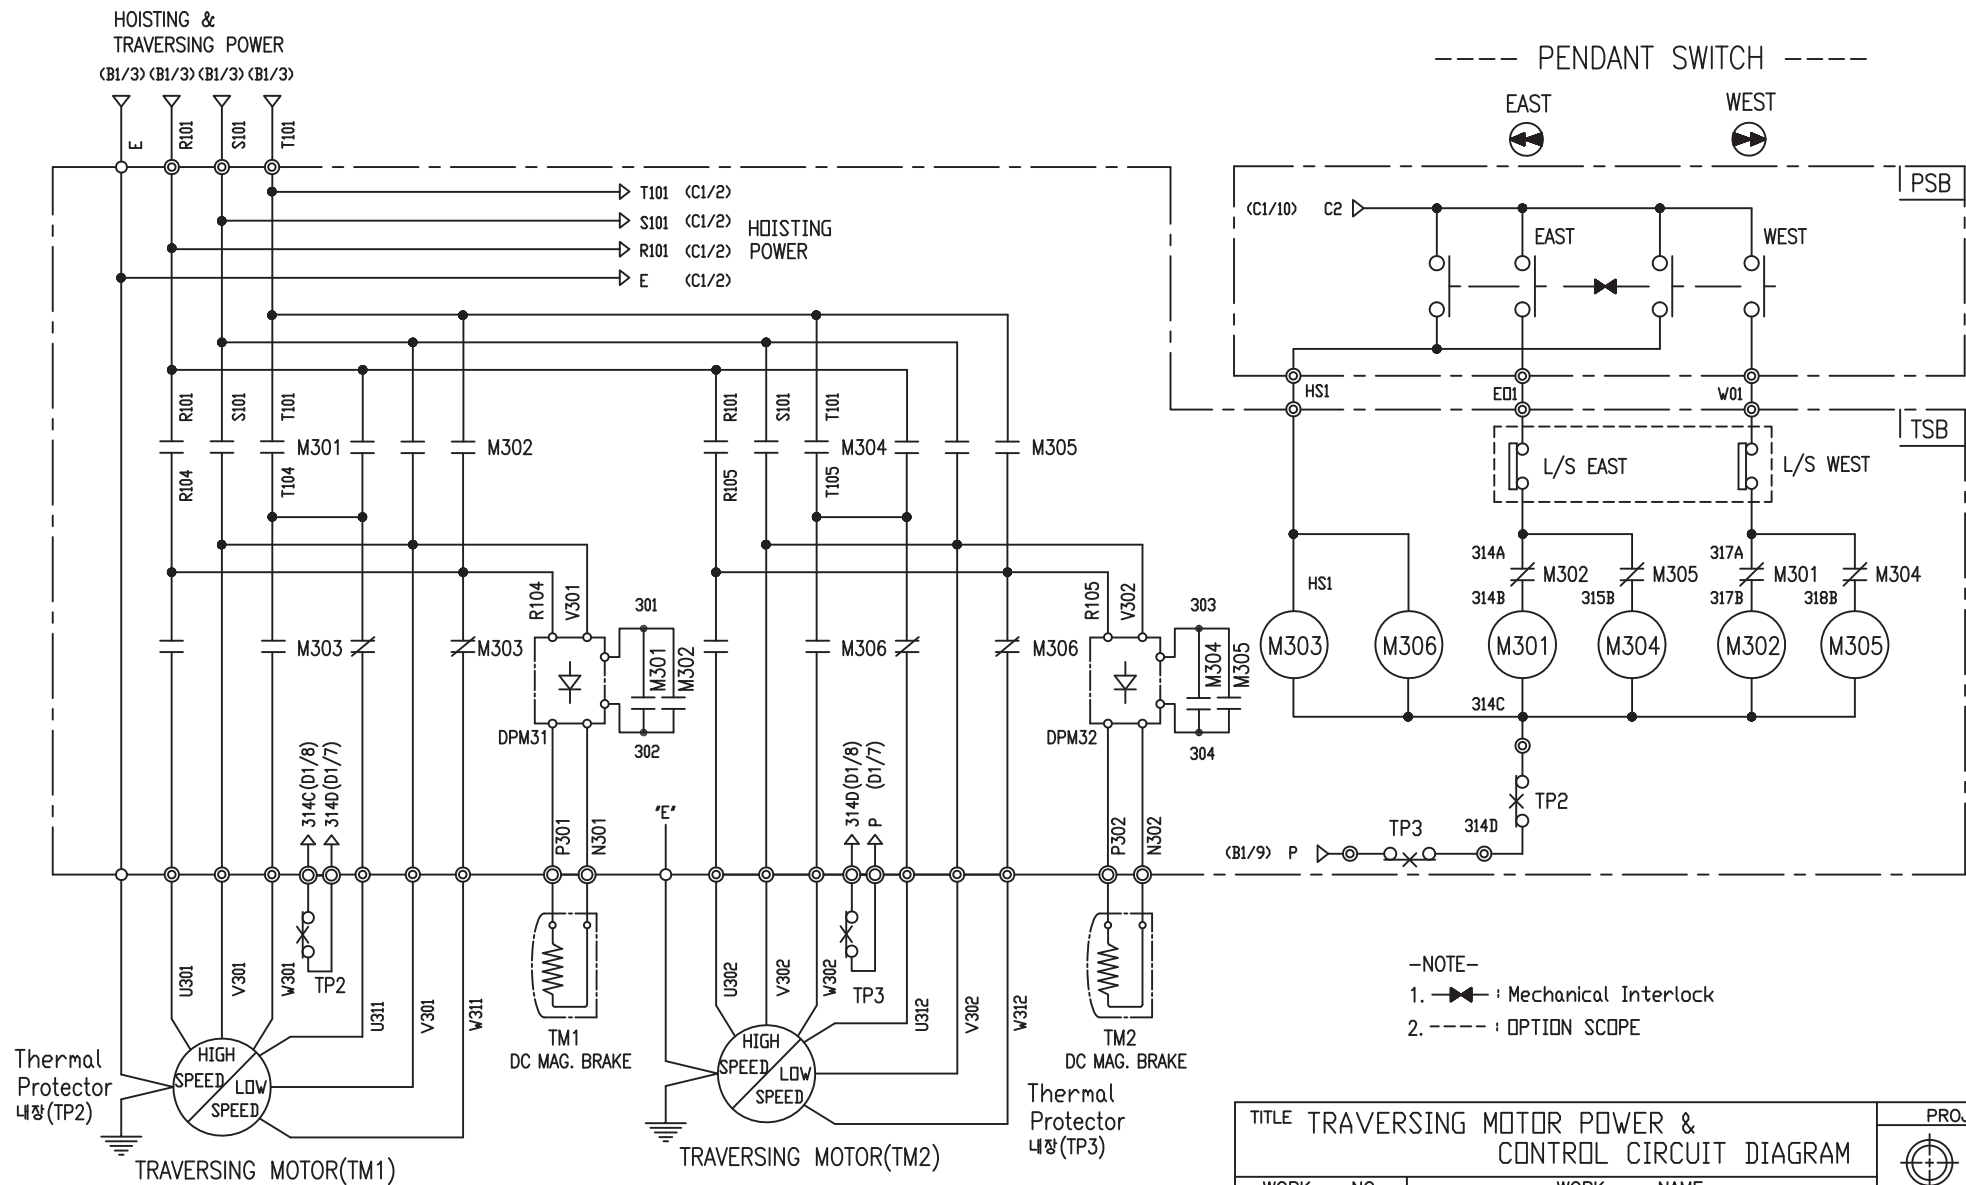

—NOTE—

1.  : Mechanical Interlock
2. ---- : OPTION SCOPE

SPECIFICATION	MAGNET CONTACT		Thermal Protector	SILICON RECTIFIER					TRAVERSING MOTOR
SYMBOLS	M301, M302, M303 M304, M305, M306		TP2, TP3	DPM31, DPM32					TM1, TM2
DESCRIPTION	GMC12	DMC12	17AM032	AC220V	AC380V	AC440V	AC460V	AC480V	0.4/0.14KW *4/12P (2set)
				DC99V	DC171V	DC198V	DC207V	DC216V	
MAKER	LS	DONGA	Texas Instruments	LK					LK

TITLE TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM					PROJECTION 	
WORK	NO	WORK NAME				
608		DHDAM (HOOK간 거리 1M이상)			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	DHDAM	
LEE.G.H				CODE NO		
2010.07.30						
 L K HOIST CO., LTD.						

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	1.8 - 4 - 46	
4. RATED POWER	1.8 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	1740 RPM	
12. FULL LOAD CURRENT	4.5 A	
13. STARTING CURRENT AT RATED VOLTAGE	22.2 A	
14. MINIMUM STARTING VOLTAGE	397 V	
15. EFFICIENCY AT 100% RATED LOAD	72.4 %	
16. POWER FACTOR AT 100% RATED LOAD	69.4 %	
17. STARTING TORQUE	246 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.4 - 4 - 46	
4. RATED POWER	0.4 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	460 V	60HZ
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 RPM	
12. FULL LOAD CURRENT	1.43 A	
13. STARTING CURRENT AT RATED VOLTAGE	6.6 A	
14. MINIMUM STARTING VOLTAGE	405 V	
15. EFFICIENCY AT 100% RATED LOAD	59 %	
16. POWER FACTOR AT 100% RATED LOAD	59.5 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6202DD OPL : 6004ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.3 - 6 - 46	
4. RATED POWER	0.3 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	1.4 A	
13. STARTING CURRENT AT RATED VOLTAGE	7.66 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	53 %	
16. POWER FACTOR AT 100% RATED LOAD	51 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.4/0.14 - 4/12 - 46	
4. RATED POWER	0.4/0.14 KW × 4/12 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1710 / 550 RPM	
12. FULL LOAD CURRENT	1.43 / 0.94 A	
13. STARTING CURRENT AT RATED VOLTAGE	7.1 / 4.7 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	62 / 49 %	
16. POWER FACTOR AT 100% RATED LOAD	56.5 / 41 %	
17. STARTING TORQUE	230 / 231 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	