




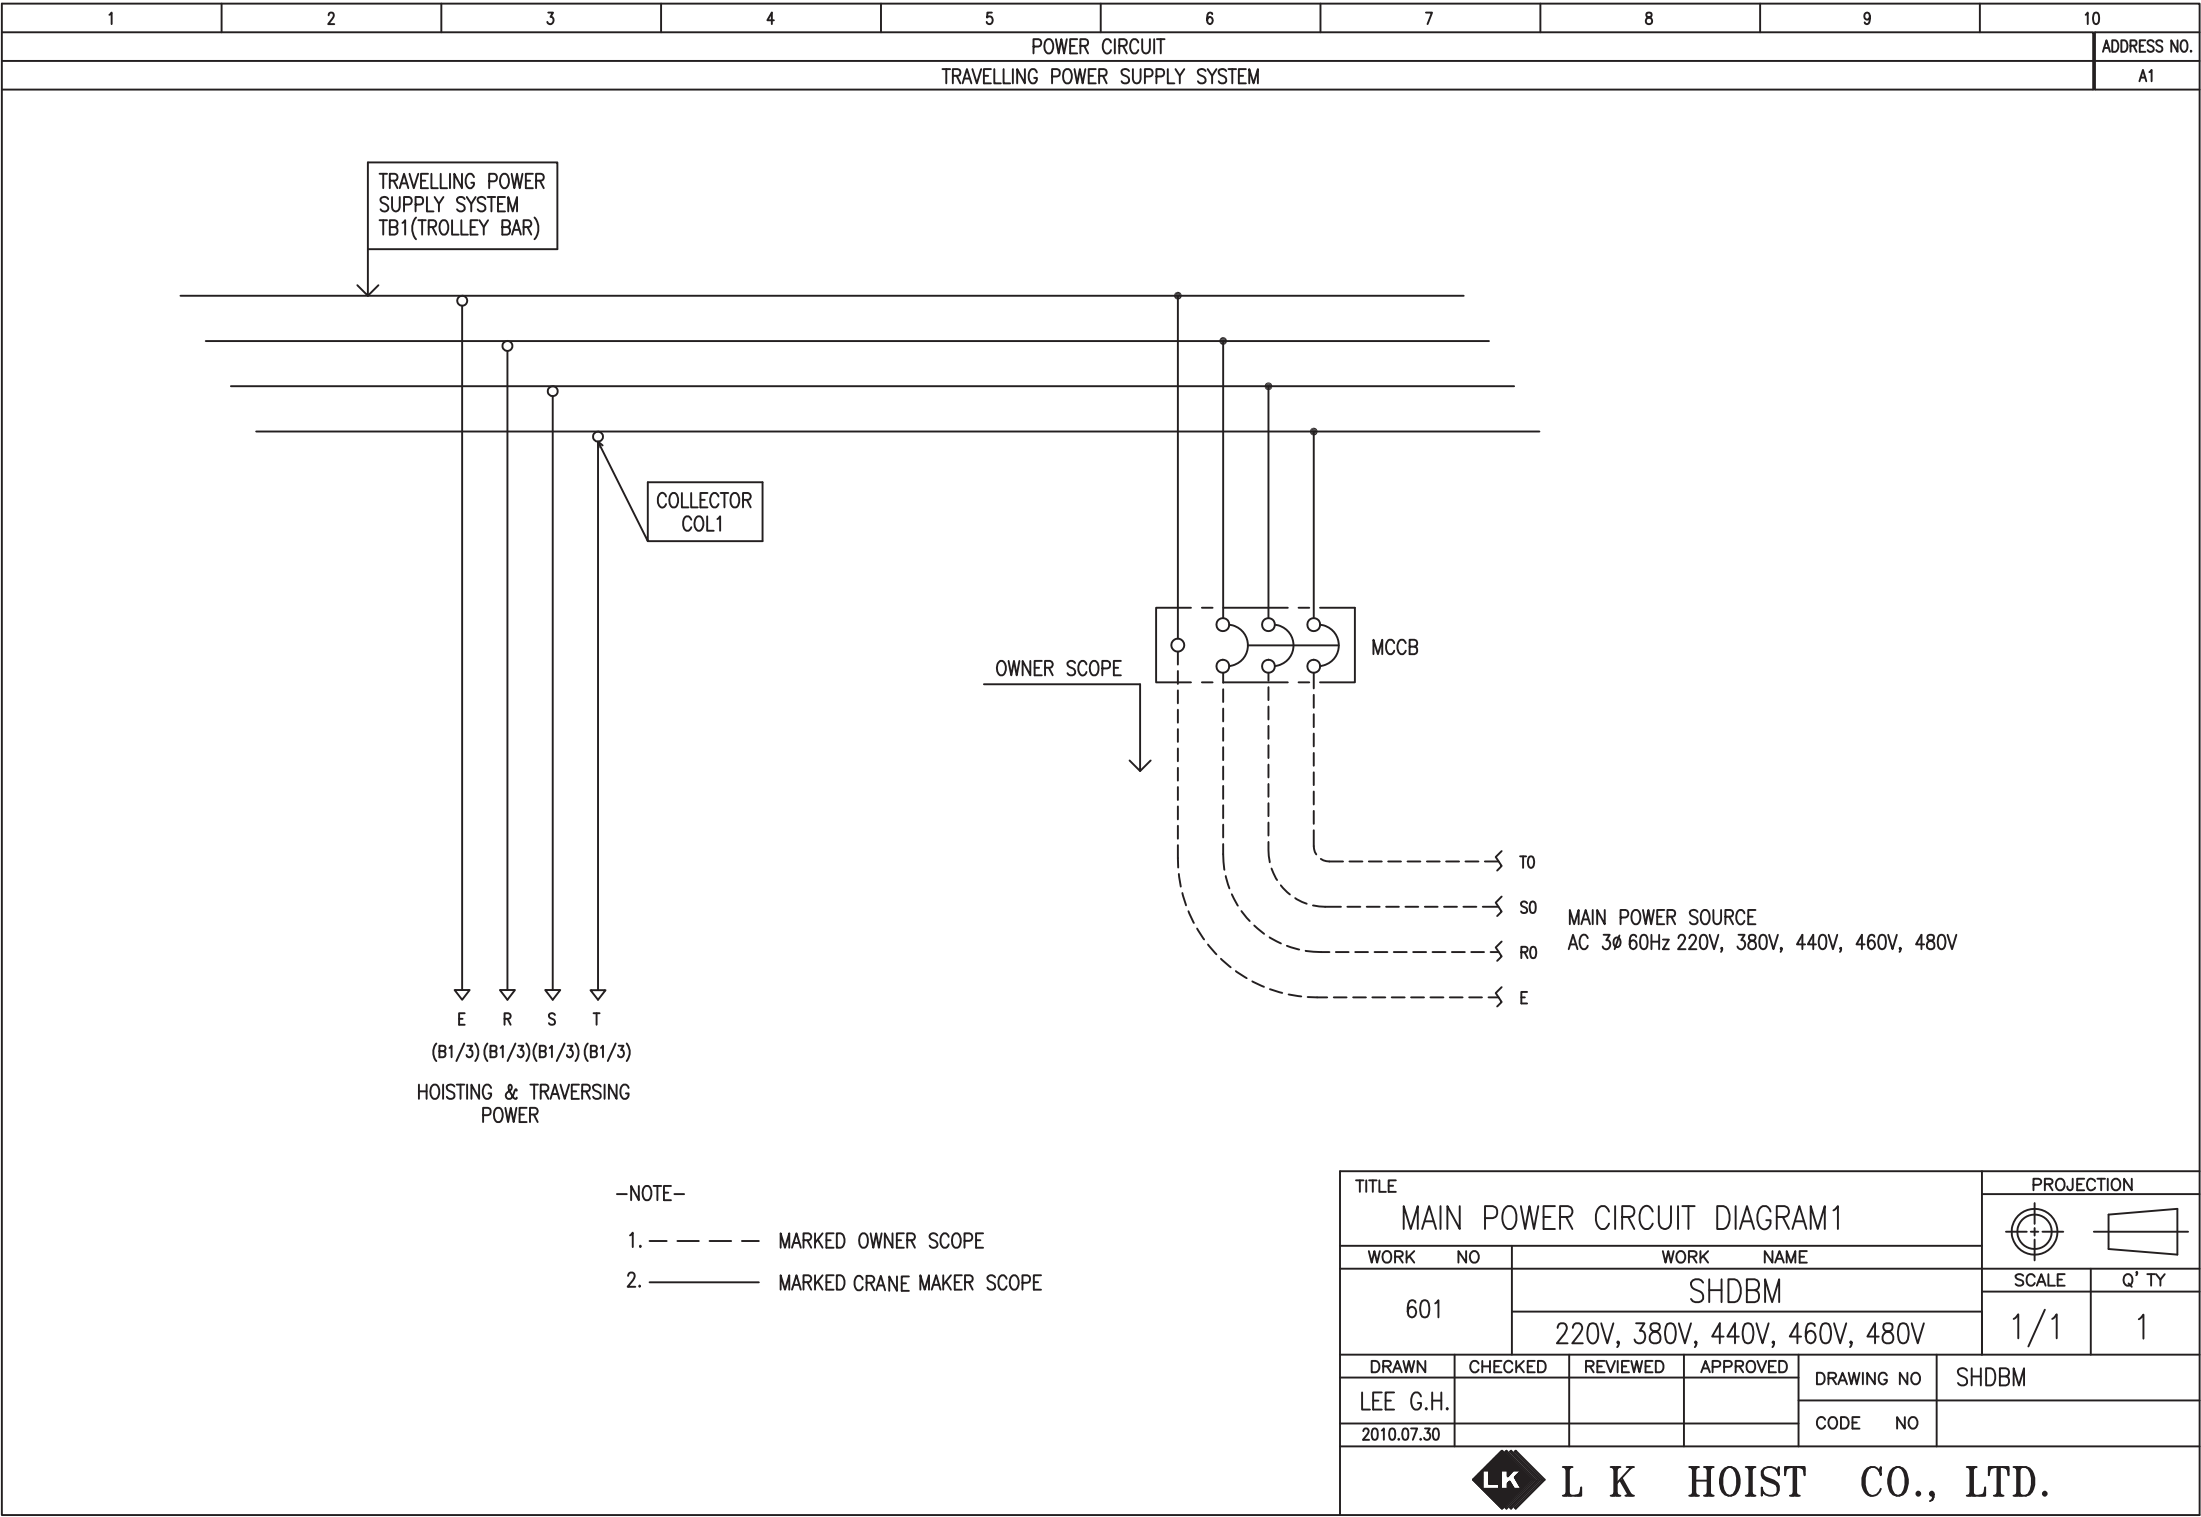

1	2	3	4	5	6	7	8	9	10
POWER CIRCUIT					CONTROL CIRCUIT				ADDRESS NO. B1

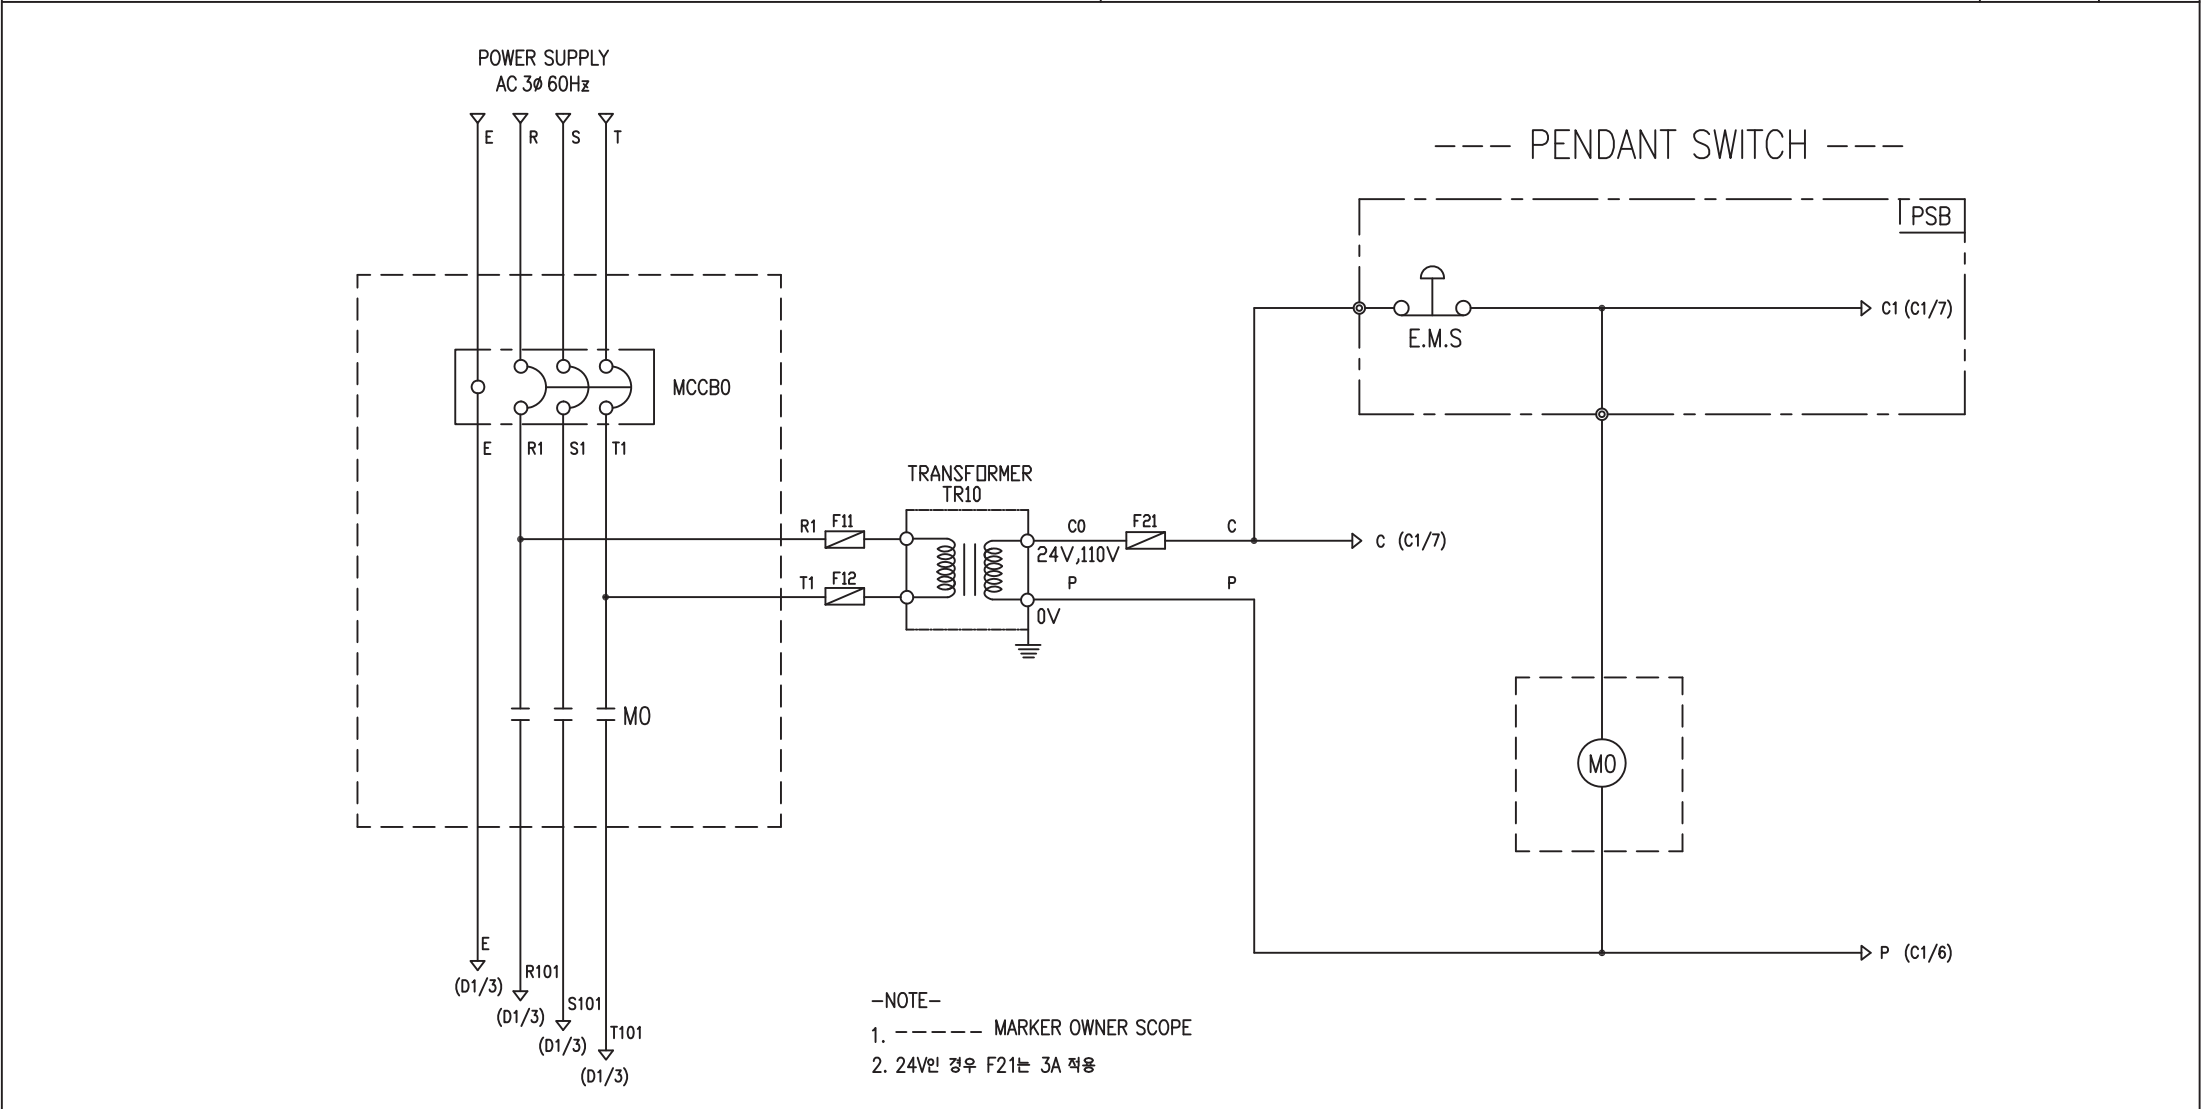

SPECIFICATION						TITLE						PROJECTION	
NO FUSE BREAKER						MAIN POWER & CONTROL CIRCUIT DIAGRAM						1/1	
MAGNET CONTACT						602						1	
TRANSFORMER						SHDBM						1	
FUSE						220V, 380V, 440V, 460V, 480V						1	
SYMBOLS						DRAWN						1	
MCCB0						CHECKED						1	
M0						REVIEWED						1	
TR10						APPROVED						1	
F11, F12, F21						MODEL						1	
DESCRIPTION						LEE.G.H						1	
220V 30A						2010.07.30						1	
380V 20A						CODE						1	
440V 20A						NO						1	
460V 20A						L K HOIST CO., LTD.						1	
480V 15A						L K HOIST CO., LTD.						1	
LS						L K HOIST CO., LTD.						1	
LS						L K HOIST CO., LTD.						1	
DONGA						L K HOIST CO., LTD.						1	
LK						L K HOIST CO., LTD.						1	
-						L K HOIST CO., LTD.						1	

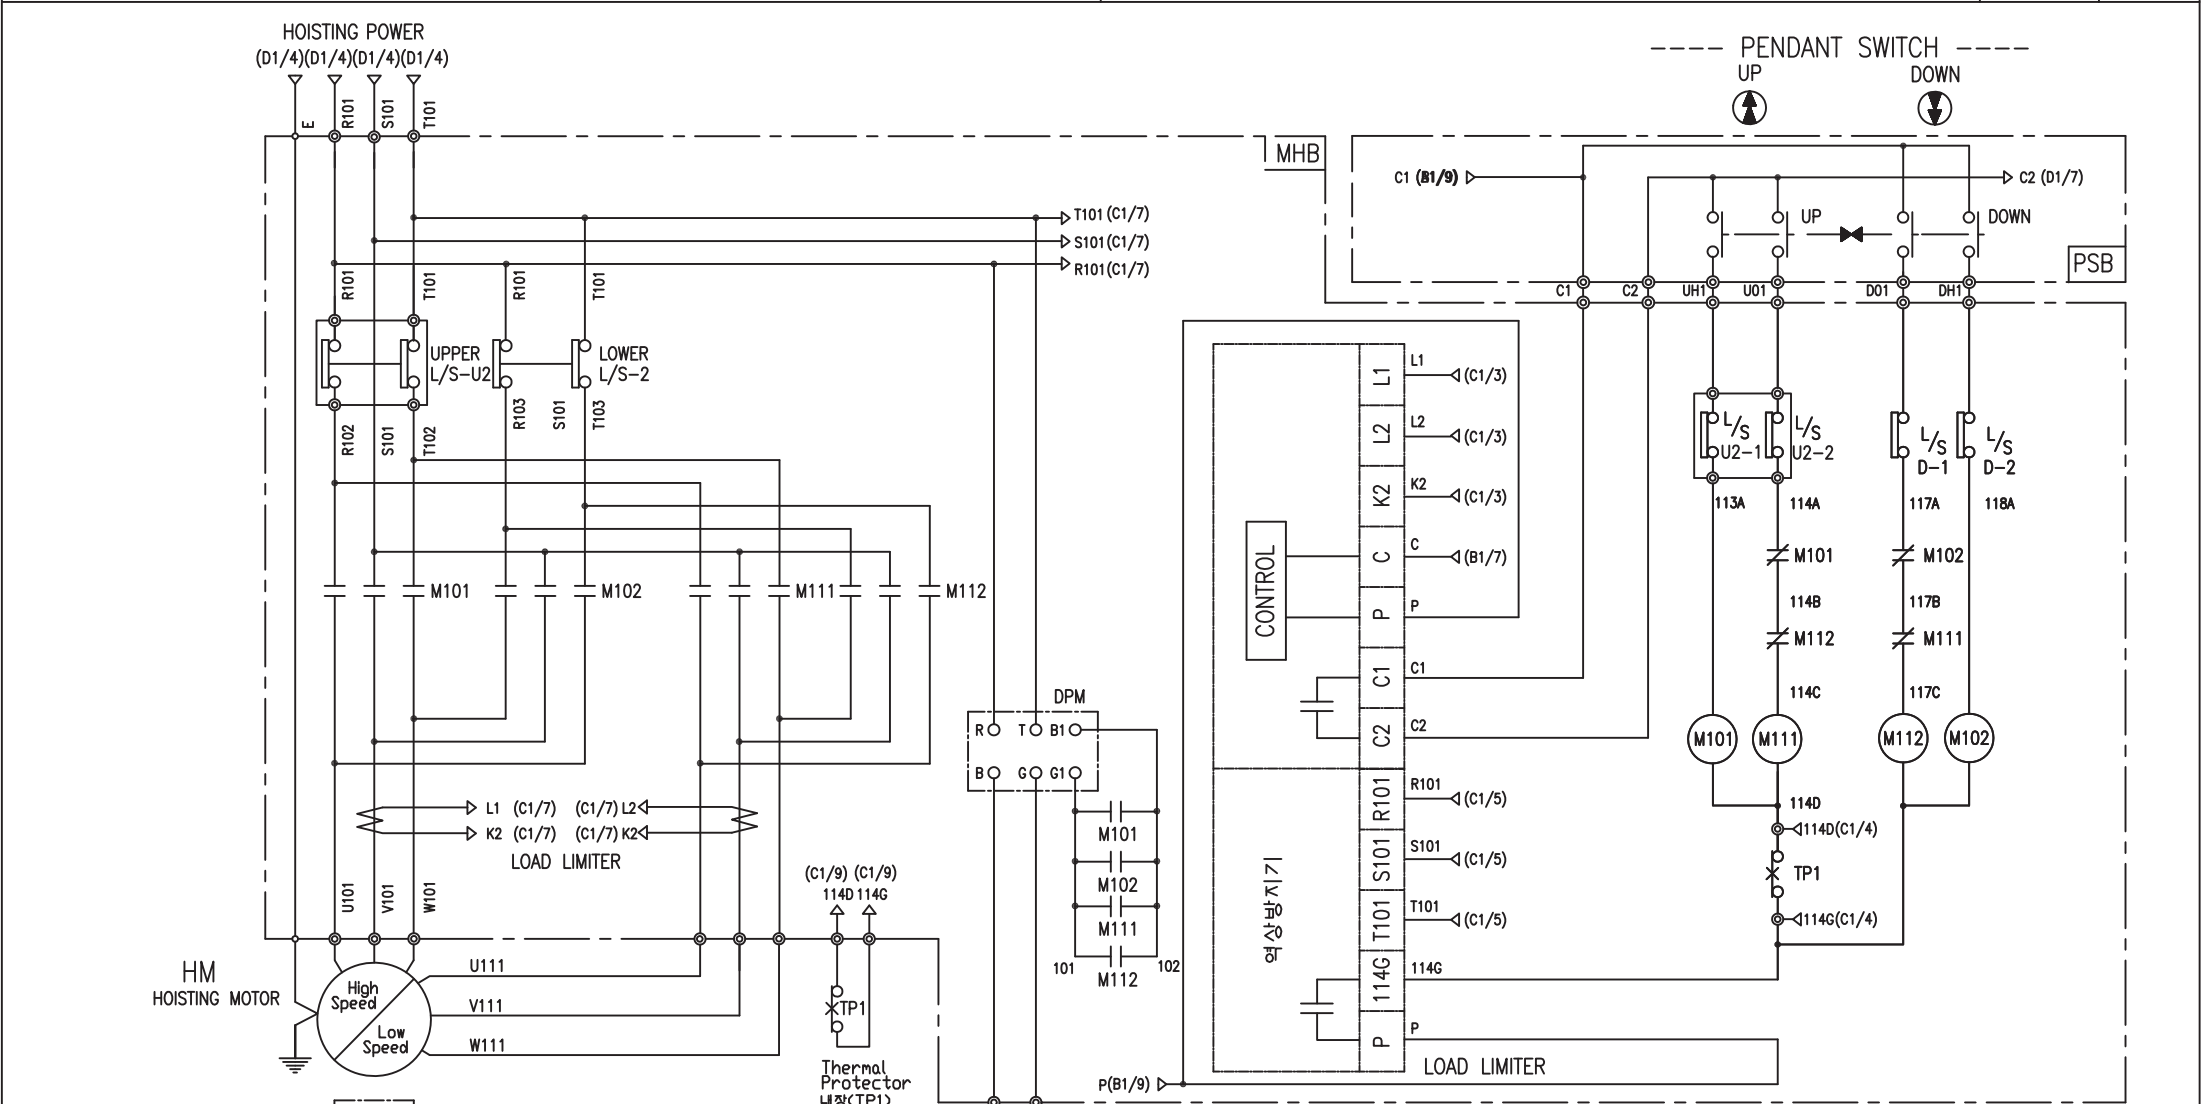

-NOTE-

1. : Mechanical Interlock

SPECIFICATION	MAGNET CONTACT	LOAD LIMITER	SILICON RECTIFIER				Thermal Protector	HOIST MOTOR
SYMBOLS	M101, M102 M103, M104	—	DPM				TP1	HM
			AC380V	AC440V	AC460V	AC480V		
DESCRIPTION	DMC12	LKDL-601	DC171V	DC198V	DC207V	DC216V	17AM032	1.8Kw * 2P/0.7Kw*6P
MAKER	DONG-A	LK	LK				Texas Instruments	LK

TITLE

HOIST POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

604

WORK NAME

SHDBM

380V, 440V, 460V, 480V

DRAWN

LEE.G.H

CHECKED

REVIEWED

APPROVED

MODEL

SHDBM

CODE NO

2010.07.30

PROJECTION

SCALE


1/1

Q' TY

1


LK

L K HOIST CO., LTD.

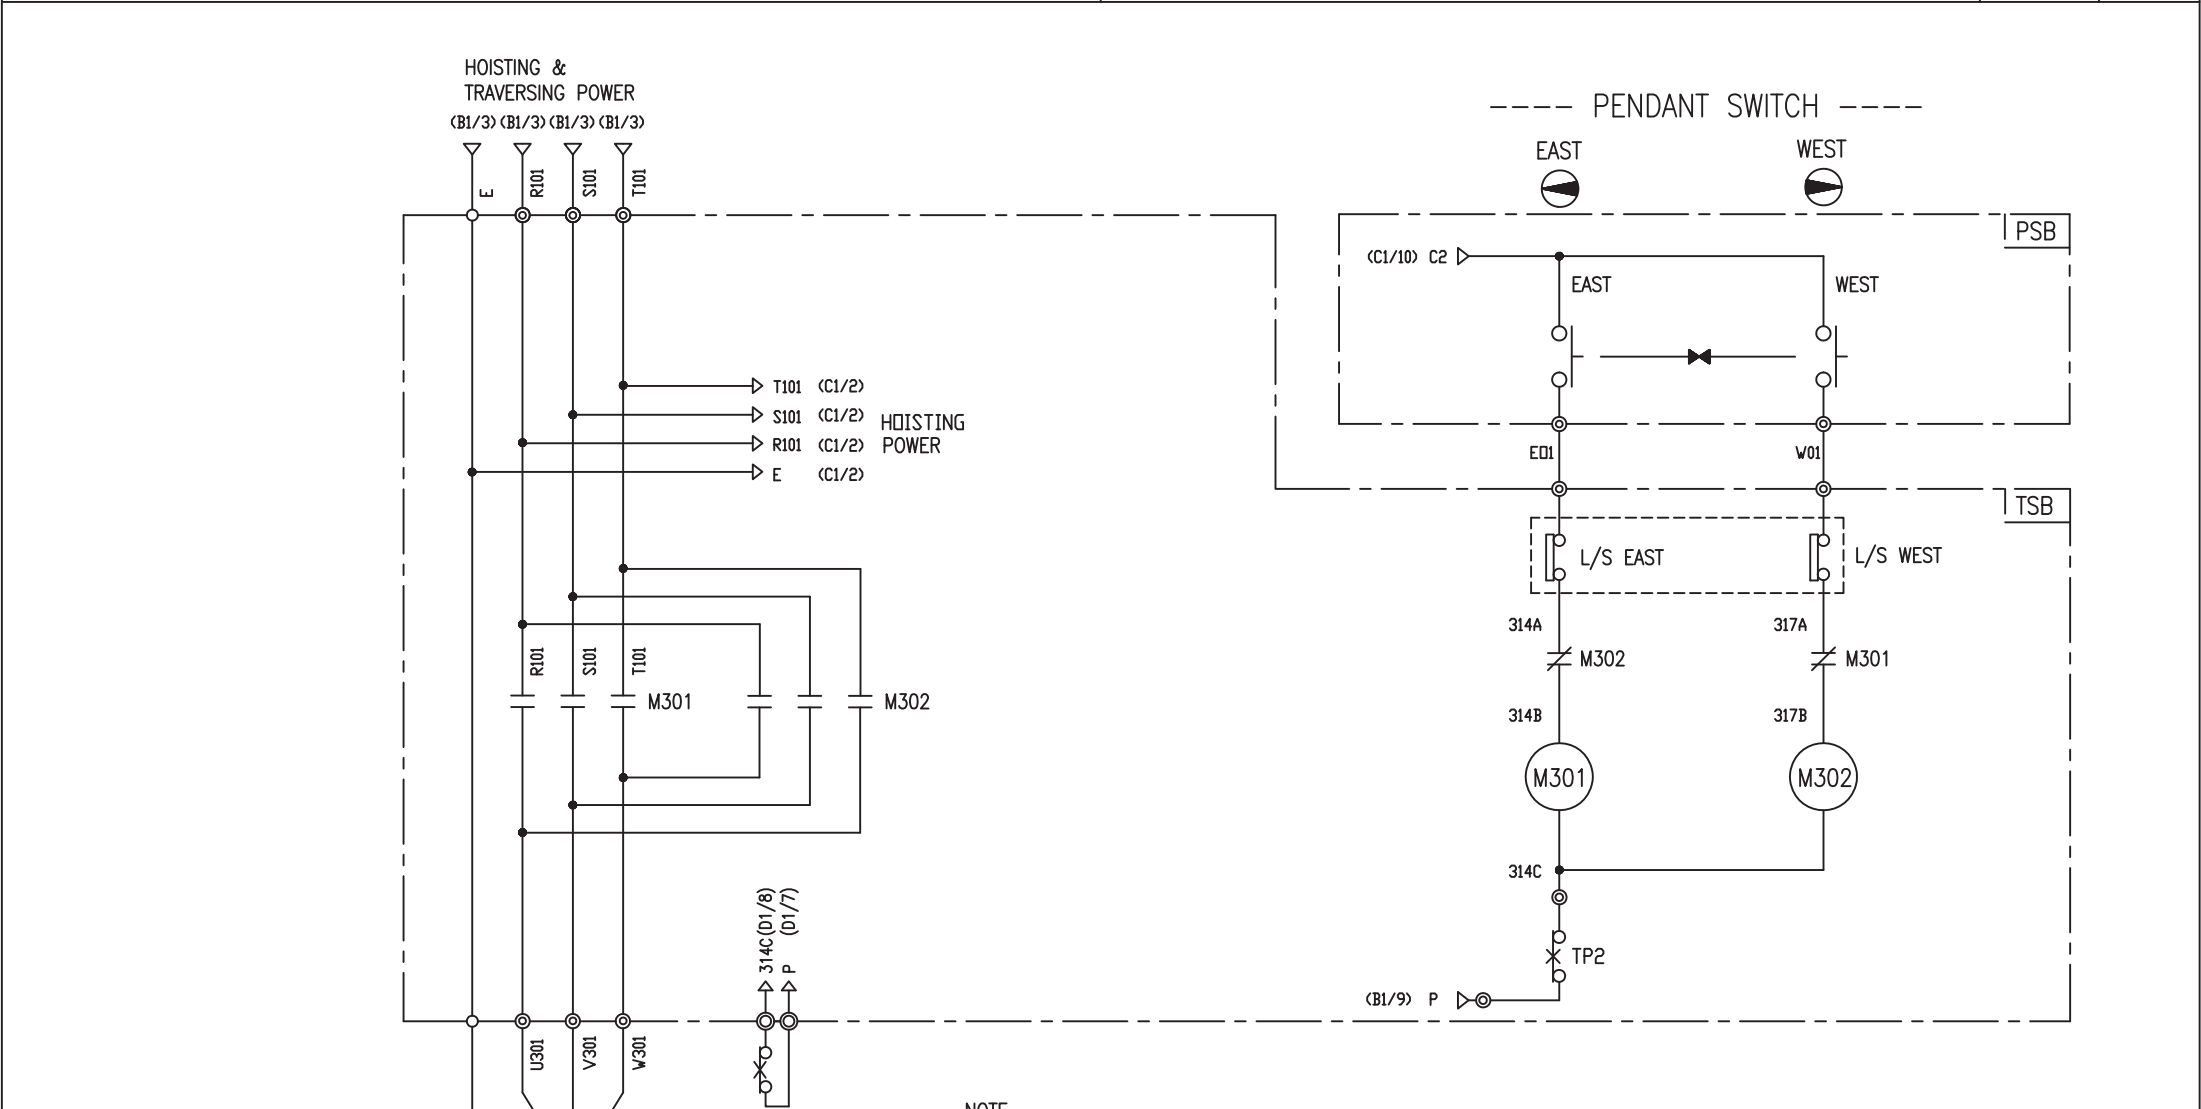

TITLE TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM				PROJECTION	
WORK NO		WORK NAME			
605		SHDBM		SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V		1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	MODEL	SHDBM
LEE.G.H				CODE NO	
2010.07.30					
L K HOIST CO., LTD.					

SPECIFICATION		MAGNET CONTACT		Thermal Protector		TRAVERSING MOTOR	
SYMBOLS		M301, M302		TP2		TM	
DESCRIPTION		GMC12	DMC12	17AM032		0.75KW *4P	0.4KW *6P
MAKER		LS	DONGA	Texas Instruments		LK	

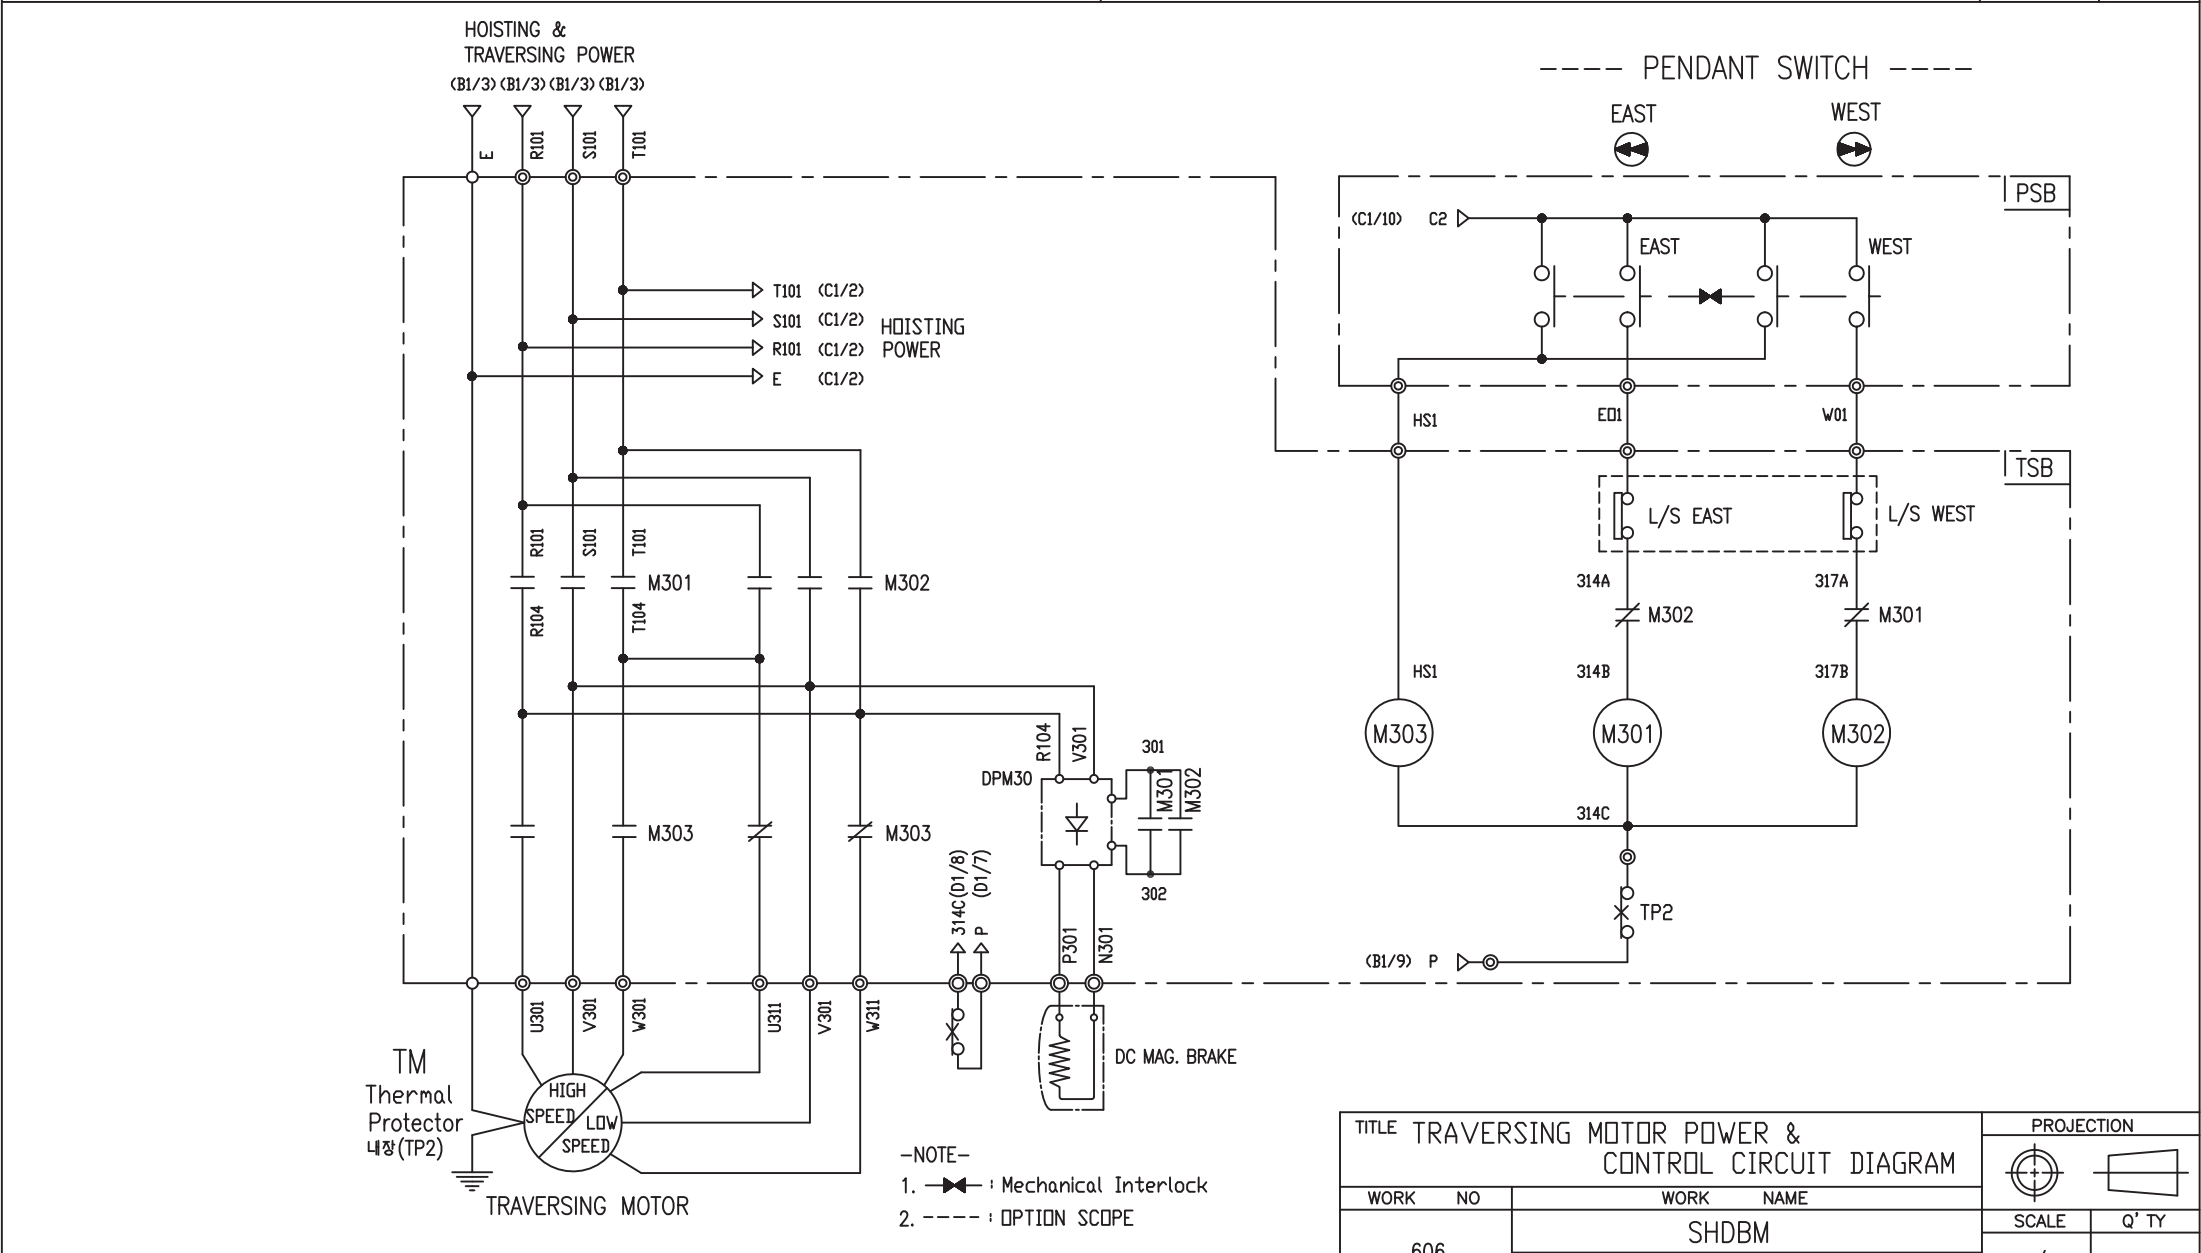

SPECIFICATION	MAGNET CONTACT		Thermal Protector	SILICON RECTIFIER					TRAVERSING MOTOR
SYMBOLS	M301, M302, M303		TP2	DPM30					TM
DESCRIPTION	GMC12	DMC12	17AM032	AC220V	AC380V	AC440V	AC460V	AC480V	0.75/0.25KW *4/12P
				DC99V	DC171V	DC198V	DC207V	DC216V	
MAKER	LS	DONGA	Texas Instruments	LK					LK

TITLE TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM

WORK NO606

WORK NAMESHDBM

220V, 380V, 440V, 460V, 480V

PROJECTION

SCALE1/1

Q' TY1

DRAWNLEE.G.H

CHECKED

REVIEWED

APPROVED

MODEL

SHDBM

2010.07.30

CODE NO

L K HOIST CO., LTD.

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	1.8/0.7 - 2/6 - 46	
4. RATED POWER	1.8/0.7 KW × 2/6 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	3440/1140 RPM	
12. FULL LOAD CURRENT	5.7/2.0 A	
13. STARTING CURRENT AT RATED VOLTAGE	30/11 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	64/64 %	
16. POWER FACTOR AT 100% RATED LOAD	64/64 %	
17. STARTING TORQUE	235 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75 - 4 - 46	
4. RATED POWER	0.75 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1670 RPM	
12. FULL LOAD CURRENT	2.3 A	
13. STARTING CURRENT AT RATED VOLTAGE	12.6 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.4 - 6 - 46	
4. RATED POWER	0.4 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	460 V 60HZ	
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	1.53 A	
13. STARTING CURRENT AT RATED VOLTAGE	8.4 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	249 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75/0.25 - 4/12 - 46	
4. RATED POWER	0.75/0.25 KW × 4/12 P	
5. RATED VOLTAGE AND FREQUENCY	460 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1670 / 550 RPM	
12. FULL LOAD CURRENT	2.3 / 1.44 A	
13. STARTING CURRENT AT RATED VOLTAGE	12.7 / 7.92 A	
14. MINIMUM STARTING VOLTAGE	414 V	
15. EFFICIENCY AT 100% RATED LOAD	65 / 48 %	
16. POWER FACTOR AT 100% RATED LOAD	63 / 45 %	
17. STARTING TORQUE	250 / 243 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	