


L K HOIST

ON DRAWING

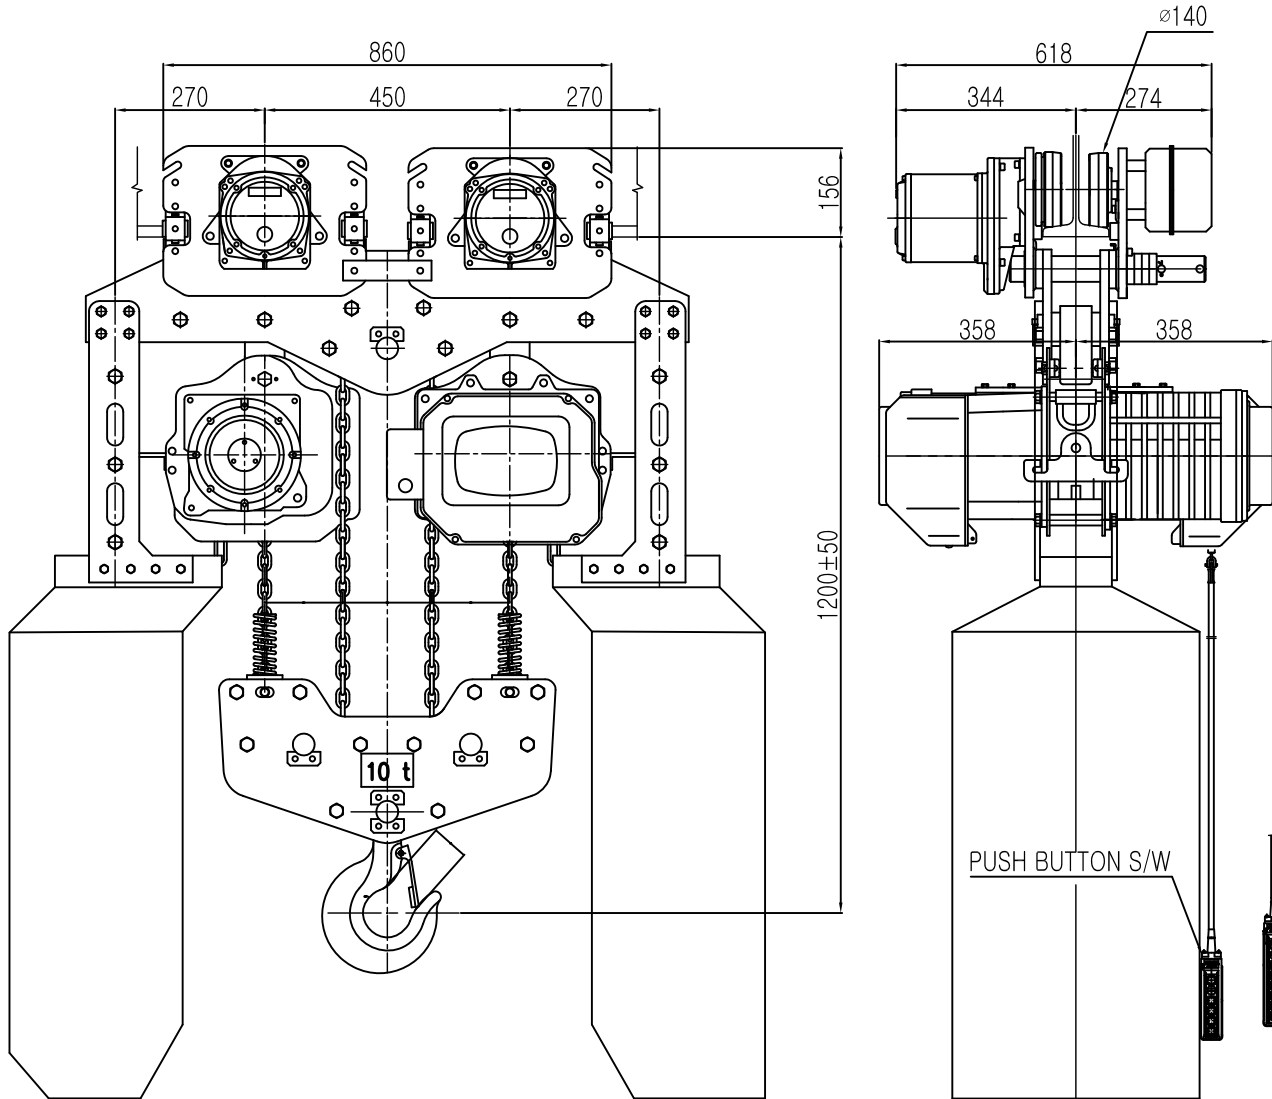

적용 I-BEAM)

1) 지점간거리 : I-250X125X7.5/12.5-1.2M

2) 지점간거리 : I-300X150X10/18.5-2.5M

3) 지점간거리 : I-450X175X13/26-6.0M

4) 지점간거리 : I-600X190X13/25-7.0M

SPECIFICATION

		LK-DAM-10W		
RATED LOAD	(TON)	10		
TESTING LOAD	(TON)	12.5		
LIFTING HEIGHT	(M)	50		
HOISTING	SPEED (M/MIN)	3.25		
	MOTOR (KW)	3.5kw x 4p (2SET)		
TRAVERSING	SPEED (M/MIN)	20	14	20/7
	MOTOR (KW)	0.75kw x 4p (2SET)	0.4kw x 6p (2SET)	0.75/0.25kw x 4/12p (2SET)
POWER SUPPLY	AC220.380.440.460.480Vx3ø x 60 Hz			
OPERATING METHOD	P.B type ON . FL			
LOAD CHAIN	ø11.2 X 34 (4FALL)			
WEIGHT	(KG)	1300KG		
I-BEAM 적용폭		125 ~ 190MM		

NOTE)

1)점검 설비를 갖출 것



2)인허가 서류를 완성검사시 제출 할 것

TITLE					PROJECTION	
ELECTRIC CHAIN HOIST DAM-10W						
WORK	NO	WORK NAME				
		LK-DAM-10W			SCALE	Q' TY
						1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE NO		
2010.08.01						
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED

ELEPHANT

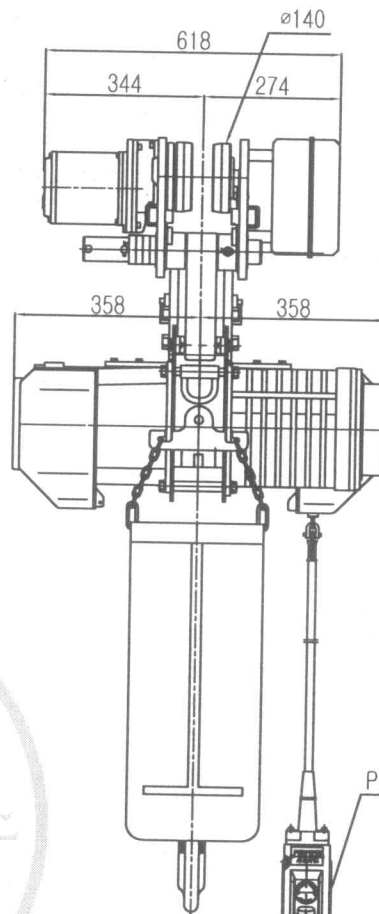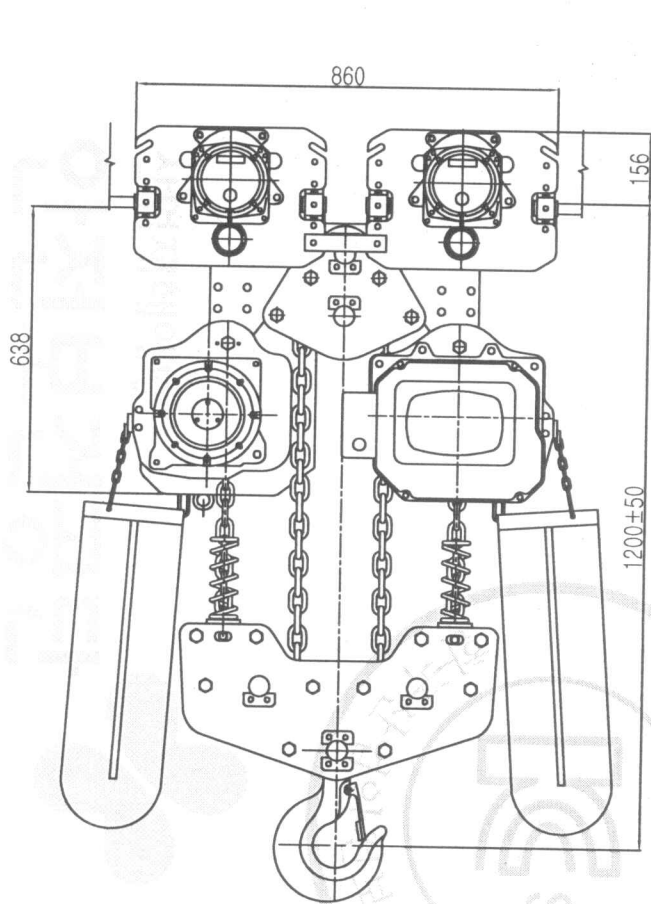

SPECIFICATION

		LK-DAM-10W		
RATED LOAD	(TON)	10		
TESTING LOAD	(TON)	12.5		
LIFTING HEIGHT	(M)	50		
HOISTING	SPEED (M/MIN)	3.25		
	MOTOR (KW)	3.5kw x 4p (2SET)		
TRAVERSING	SPEED (M/MIN)	20	14	20/7
	MOTOR (KW)	0.75kw x 4p (2SET)	0.4kw x 6p (2SET)	0.75/0.25kw x 4/12p (2SET)
POWER SUPPLY	AC220.380.440.460.480Vx3ø x 60 Hz			
OPERATING METHOD	P.B type ON . FL			
LOAD CHAIN	ø11.2 X 34 (4FALL)			
WEIGHT	(KG)	1300KG		
I-BEAM 적용폭		125 ~ 190MM		

NOTE)

- 1)점검 설비를 갖추어 것
- 2)인허가 서류를 완성검사시 제출 할 것

적용 I-BEAM)



- 1) 지점간거리 : I-250X125X7.5/12.5-1.2M
- 2) 지점간거리 : I-300X150X10/18.5-2.5M
- 3) 지점간거리 : I-450X175X13/26-6.0M
- 4) 지점간거리 : I-600X190X13/25-7.0M

REV. NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

TITLE						PROJECTION	
ELECTRIC CHAIN HOIST DAM-10W							
WORK NO	WORK NAME					SCALE	Q' TY
	LK-DAM-10W						1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
김 창 기				CODE NO			
2010.08.01							
L K HOIST CO., LTD.							

물품명제 및 배포금지

L K HOIST

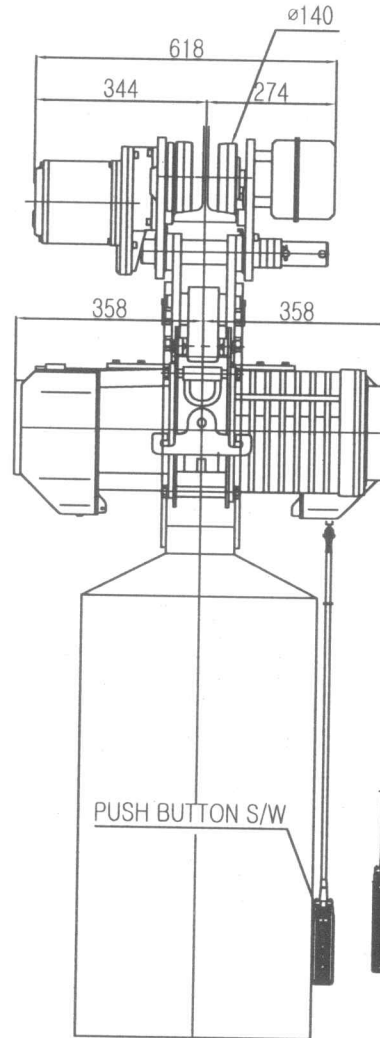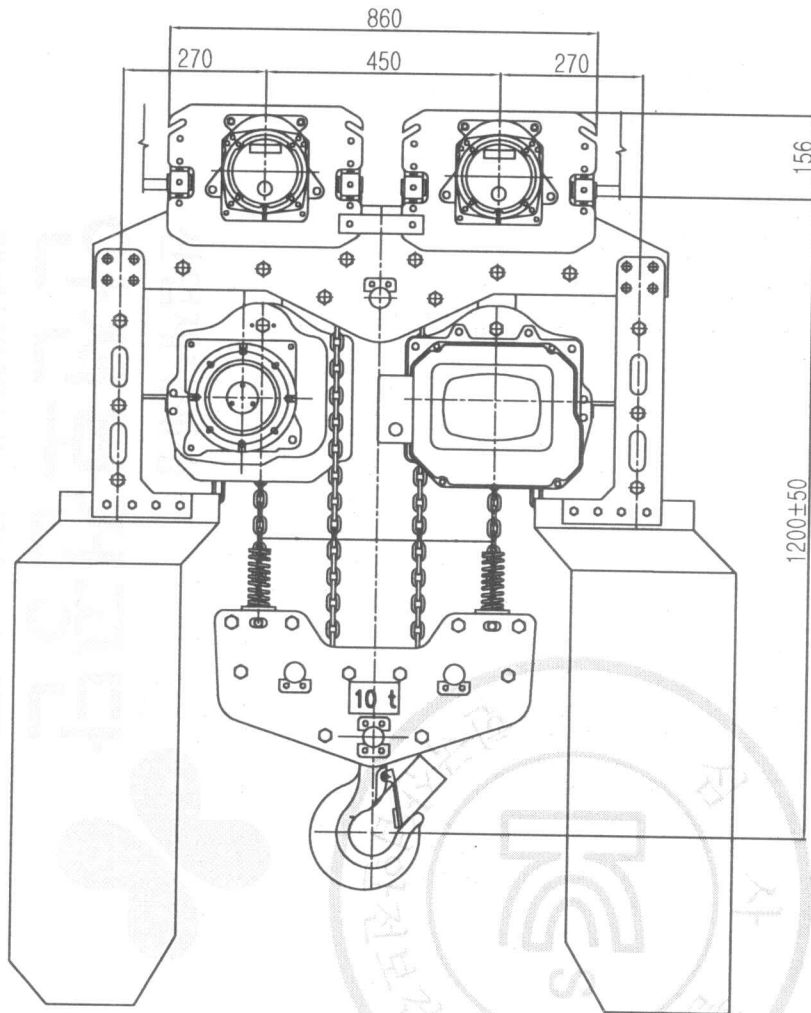

NO	DESCRIPTION	SIZE	MAT'L	Q'TY	WT (kg)	REMARKS

SPECIFICATION

LK-DAM-10W						
RATED LOAD (TON)	10					
TESTING LOAD (TON)	12.5					
LIFTING HEIGHT (M)	50					
HOISTING	SPEED (M/MIN) 3.25					
	MOTOR (KW) 3.5kw x 4p (2SET)					
TRAVERSING	SPEED (M/MIN) 20 14 20/7					
	MOTOR (KW) 0.75kw x 4p (2SET) 0.4kw x 6p (2SET) 0.75/0.25kw x 4/12p (2SET)					
POWER SUPPLY	AC220,380,440,460,480Vx3φ x 60 Hz					
OPERATING METHOD	P.B type ON, FL					
LOAD CHAIN	φ11.2 X 34 (4FALL)					
WEIGHT (KG)	1300KG					
I-BEAM 적용폭	125 ~ 190MM					

NOTE)

- 1)점검 설비를 갖추어 것
- 2)인허가 서류를 완성검사시 제출 할 것


적용 I-BEAM)

- 1) 지점간거리 : I-250X125X7.5/12.5-1.2M
- 2) 지점간거리 : I-300X150X10/18.5-2.5M
- 3) 지점간거리 : I-450X175X13/26-6.0M
- 4) 지점간거리 : I-600X190X13/25-7.0M

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

TITLE						PROJECTION	
ELECTRIC CHAIN HOIST DAM-10W							
WORK NO	WORK NAME					SCALE	Q'TY
	LK-DAM-10W						1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
김창기				CODE NO			
2010.08.01							
L K HOIST CO., LTD.							

ELEPHANT

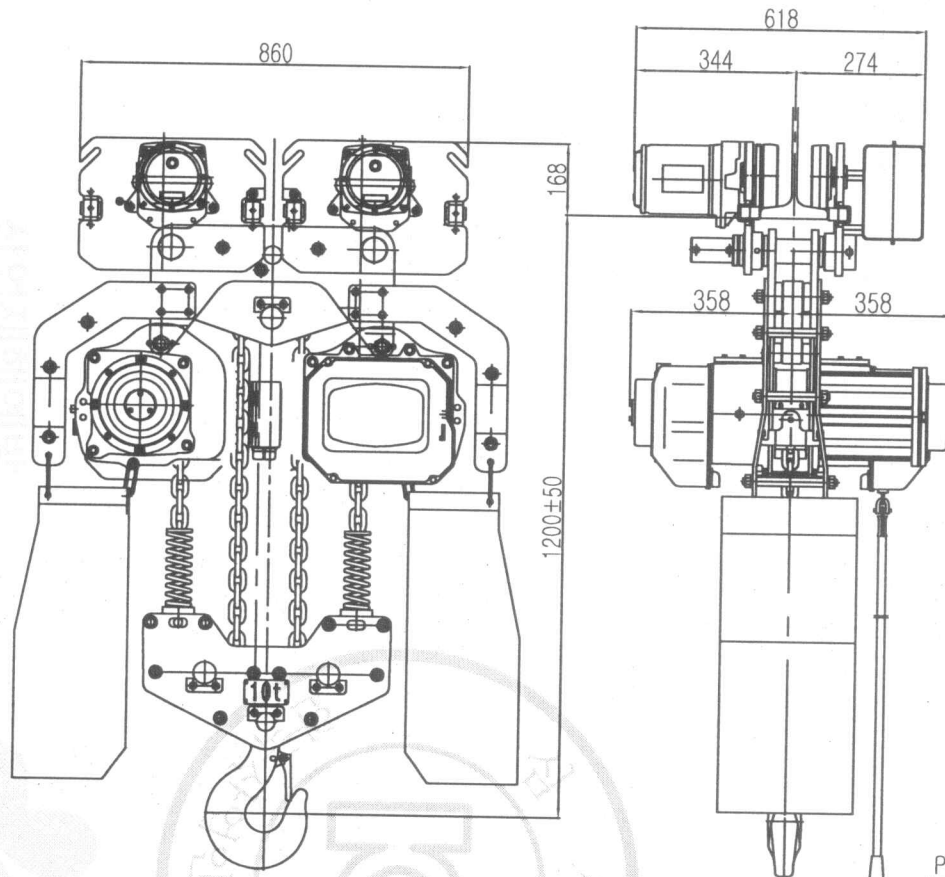

SPECIFICATION

		LK-DAM-10W		
RATED LOAD (TON)		10		
TESTING LOAD (TON)		12.5		
LIFTING HEIGHT (M)		50		
HOISTING	SPEED (M/MIN)	3.25		
	MOTOR (KW)	3.5kw x 4p (2SET)		
TRAVERSING	SPEED (M/MIN)	20	14	20/7
	MOTOR (KW)	0.75kw x 4p (2SET)	0.4kw x 6p (2SET)	0.75/0.25kw x 4/12p (2SET)
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON . FL		
LOAD CHAIN		ø11.2 X 34 (4FALL)		
WEIGHT (KG)		1300KG		
I-BEAM 적용폭		125 ~ 190MM		


NOTE

- 1)점검 설비를 갖추어 것
- 2)인허가 서류를 완성검사시 제출 할 것

적용 I-BEAM

- 1) 지점간거리 : I-250X125X7.5/12.5-1.2M
- 2) 지점간거리 : I-300X150X10/18.5-2.5M
- 3) 지점간거리 : I-450X175X13/26-6.0M
- 4) 지점간거리 : I-600X190X13/25-7.0M

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

TITLE				PROJECTION	
ELECTRIC CHAIN HOIST DAM-10W					
WORK	NO	WORK		NAME	
		LK-DAM-10W		SCALE	Q' TY
					1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO	
김 창 기					
2010.08.01				CODE NO	
 L K HOIST CO., LTD.					

제품복제 및 배포금지