


L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

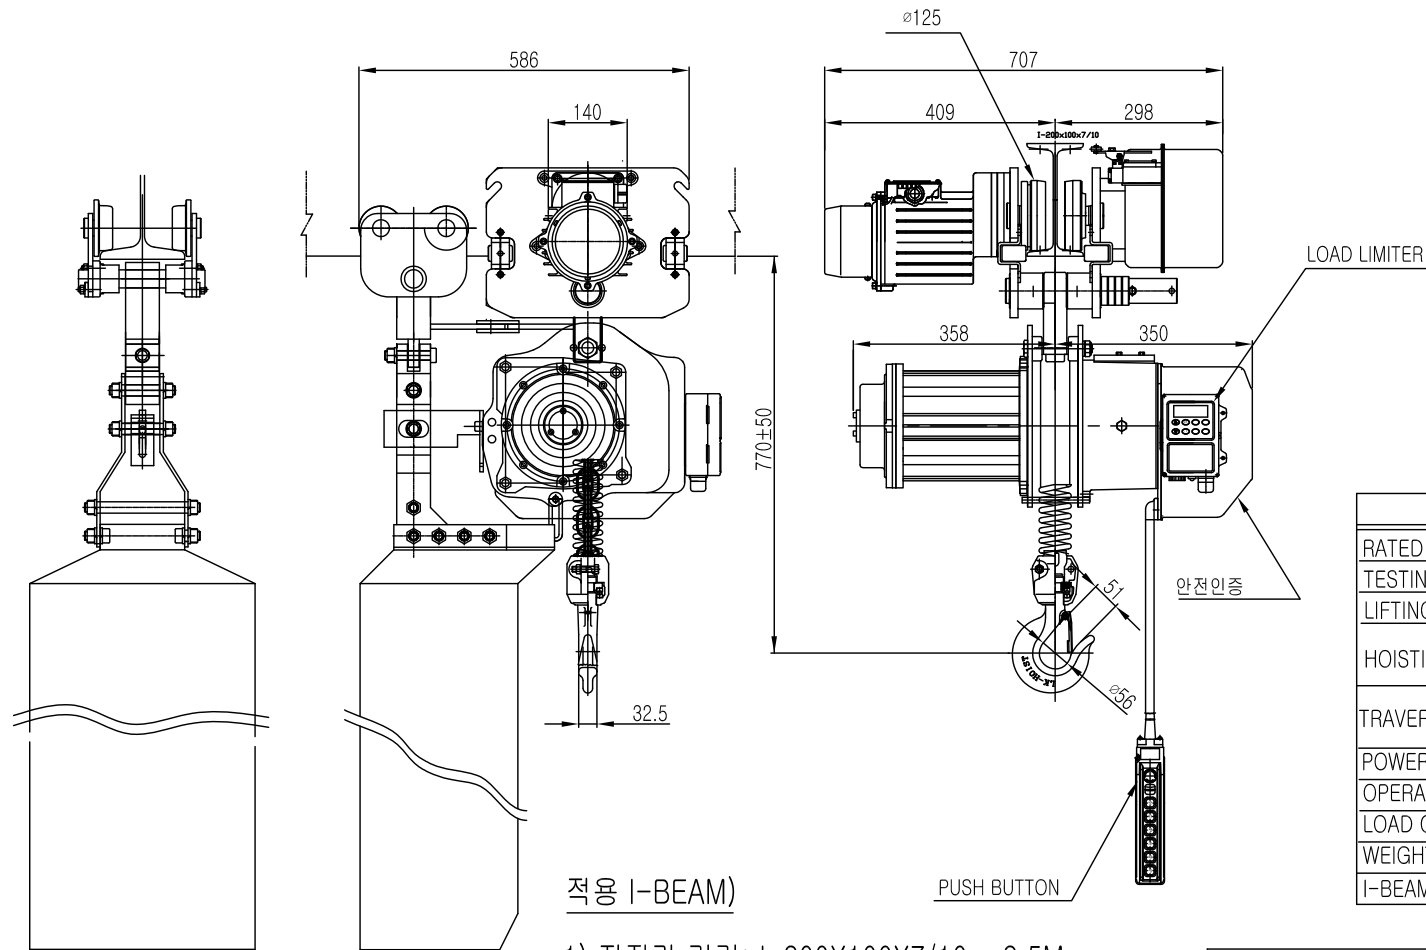

SPECIFICATION

		LK-DASD-2.5S	
RATED LOAD	(TON)	2.5	
TESTING LOAD	(TON)	3.125	
LIFTING HEIGHT	(M)	50	
HOISTING	SPEED (M/MIN)	6.5	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	20	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT	(KG)	330KG	
I-BEAM 적용폭		100 ~ 190MM	

적용 I-BEAM)


- 1) 지점간 거리: I-200X100X7/10 - 2.5M
- 2) 지점간거리 : I-250X125X7.5/12.5-4.5M
- 3) 지점간거리 : I-300X150X10/18.5-7.0M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

TITLE					PROJECTION	
ELECTRIC CHAIN HOIST LK-EDAD-2.5S						
WORK	NO	WORK NAME				
4		LK-DASD-2.5S				
		SCALE		Q' TY		
		1/1		1		
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기						
2013.10.28				CODE NO		
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED


L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

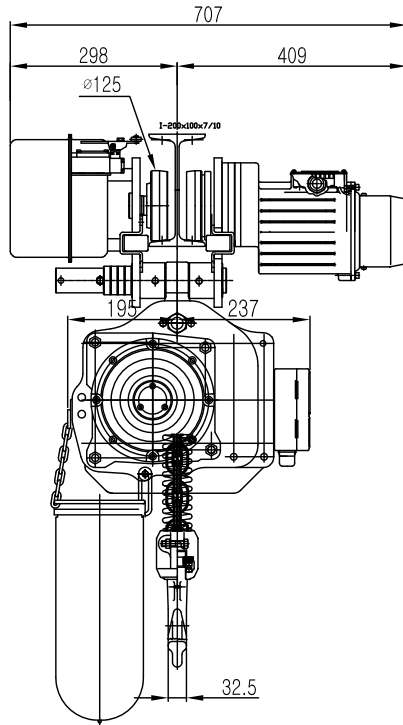

적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 2.5M
- 2) 지점간거리 : I-250X125X7.5/12.5-4.5M
- 3) 지점간거리 : I-300X150X10/18.5-7.0M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

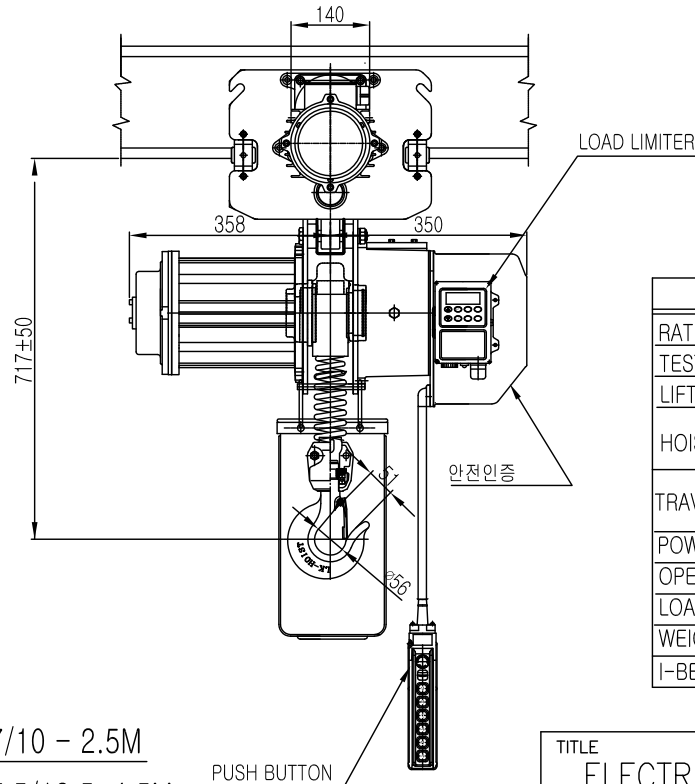

SPECIFICATION

		LK-EDAM-2.5S	
RATED LOAD (TON)		2.5	
TESTING LOAD (TON)		3.125	
LIFTING HEIGHT (M)		50	
HOISTING	SPEED (M/MIN)	6.5	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	20	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT (KG)		330KG	
I-BEAM 적용폭		100 ~ 190MM	

TITLE						PROJECTION	
ELECTRIC CHAIN HOIST LK-EDAM-2.5S							
WORK NO	WORK NAME					SCALE	Q' TY
4						1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO			
김 창 기				CODE NO			
2013.10.28							




L K HOIST CO., LTD.

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED


L K HOIST

NO	DESCRIPTION	MAT' L	Q' TY	WT (kg)	REMARKS

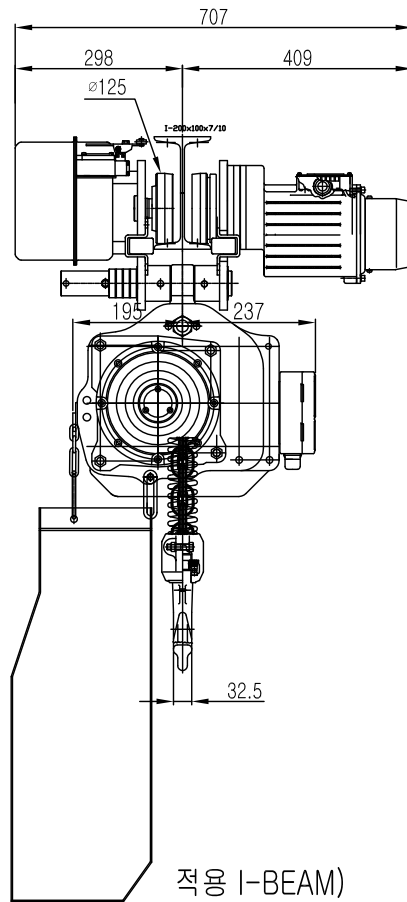


적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 2.5M
- 2) 지점간거리 : I-250X125X7.5/12.5-4.5M
- 3) 지점간거리 : I-300X150X10/18.5-7.0M
- 4) 지점간거리 : I-450X175X13/26-12M
- 5) 지점간거리 : I-600X190X13/25-15M

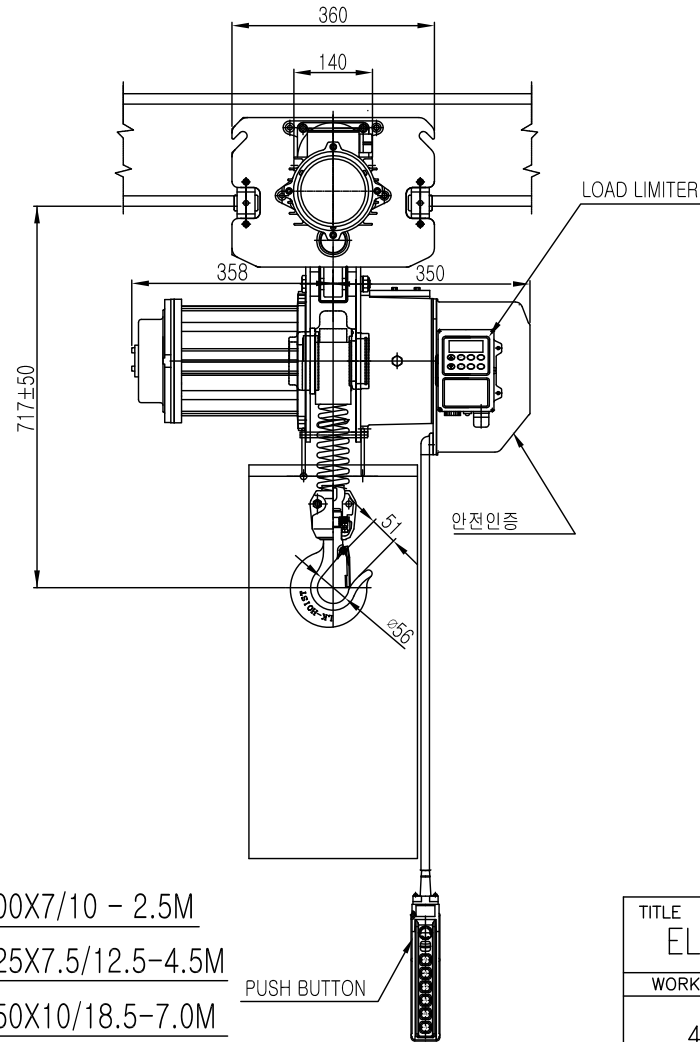

SPECIFICATION

		LK-DASD-2.5S	
RATED LOAD (TON)		2.5	
TESTING LOAD (TON)		3.125	
LIFTING HEIGHT (M)		50	
HOISTING	SPEED (M/MIN)	6.5	
	MOTOR (KW)	3.5kw x 4p	
TRAVERSING	SPEED (M/MIN)	20	14
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz	
OPERATING METHOD		P.B type ON . FL	
LOAD CHAIN		ø11.2 X 34(1FALL)	
WEIGHT (KG)		330KG	
I-BEAM 적용폭		100 ~ 190MM	

TITLE ELECTRIC CHAIN HOIST LK-DASD-2.5S					PROJECTION 	
WORK NO		WORK NAME			SCALE	Q' TY
4		LK-DASD-2.5S			1/1	1
DRAWN	CHECKED	REVIEWED	APPROVED	DRAWING NO		
김 창 기				CODE NO		
2013.10.28						
 L K HOIST CO., LTD.						

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED