



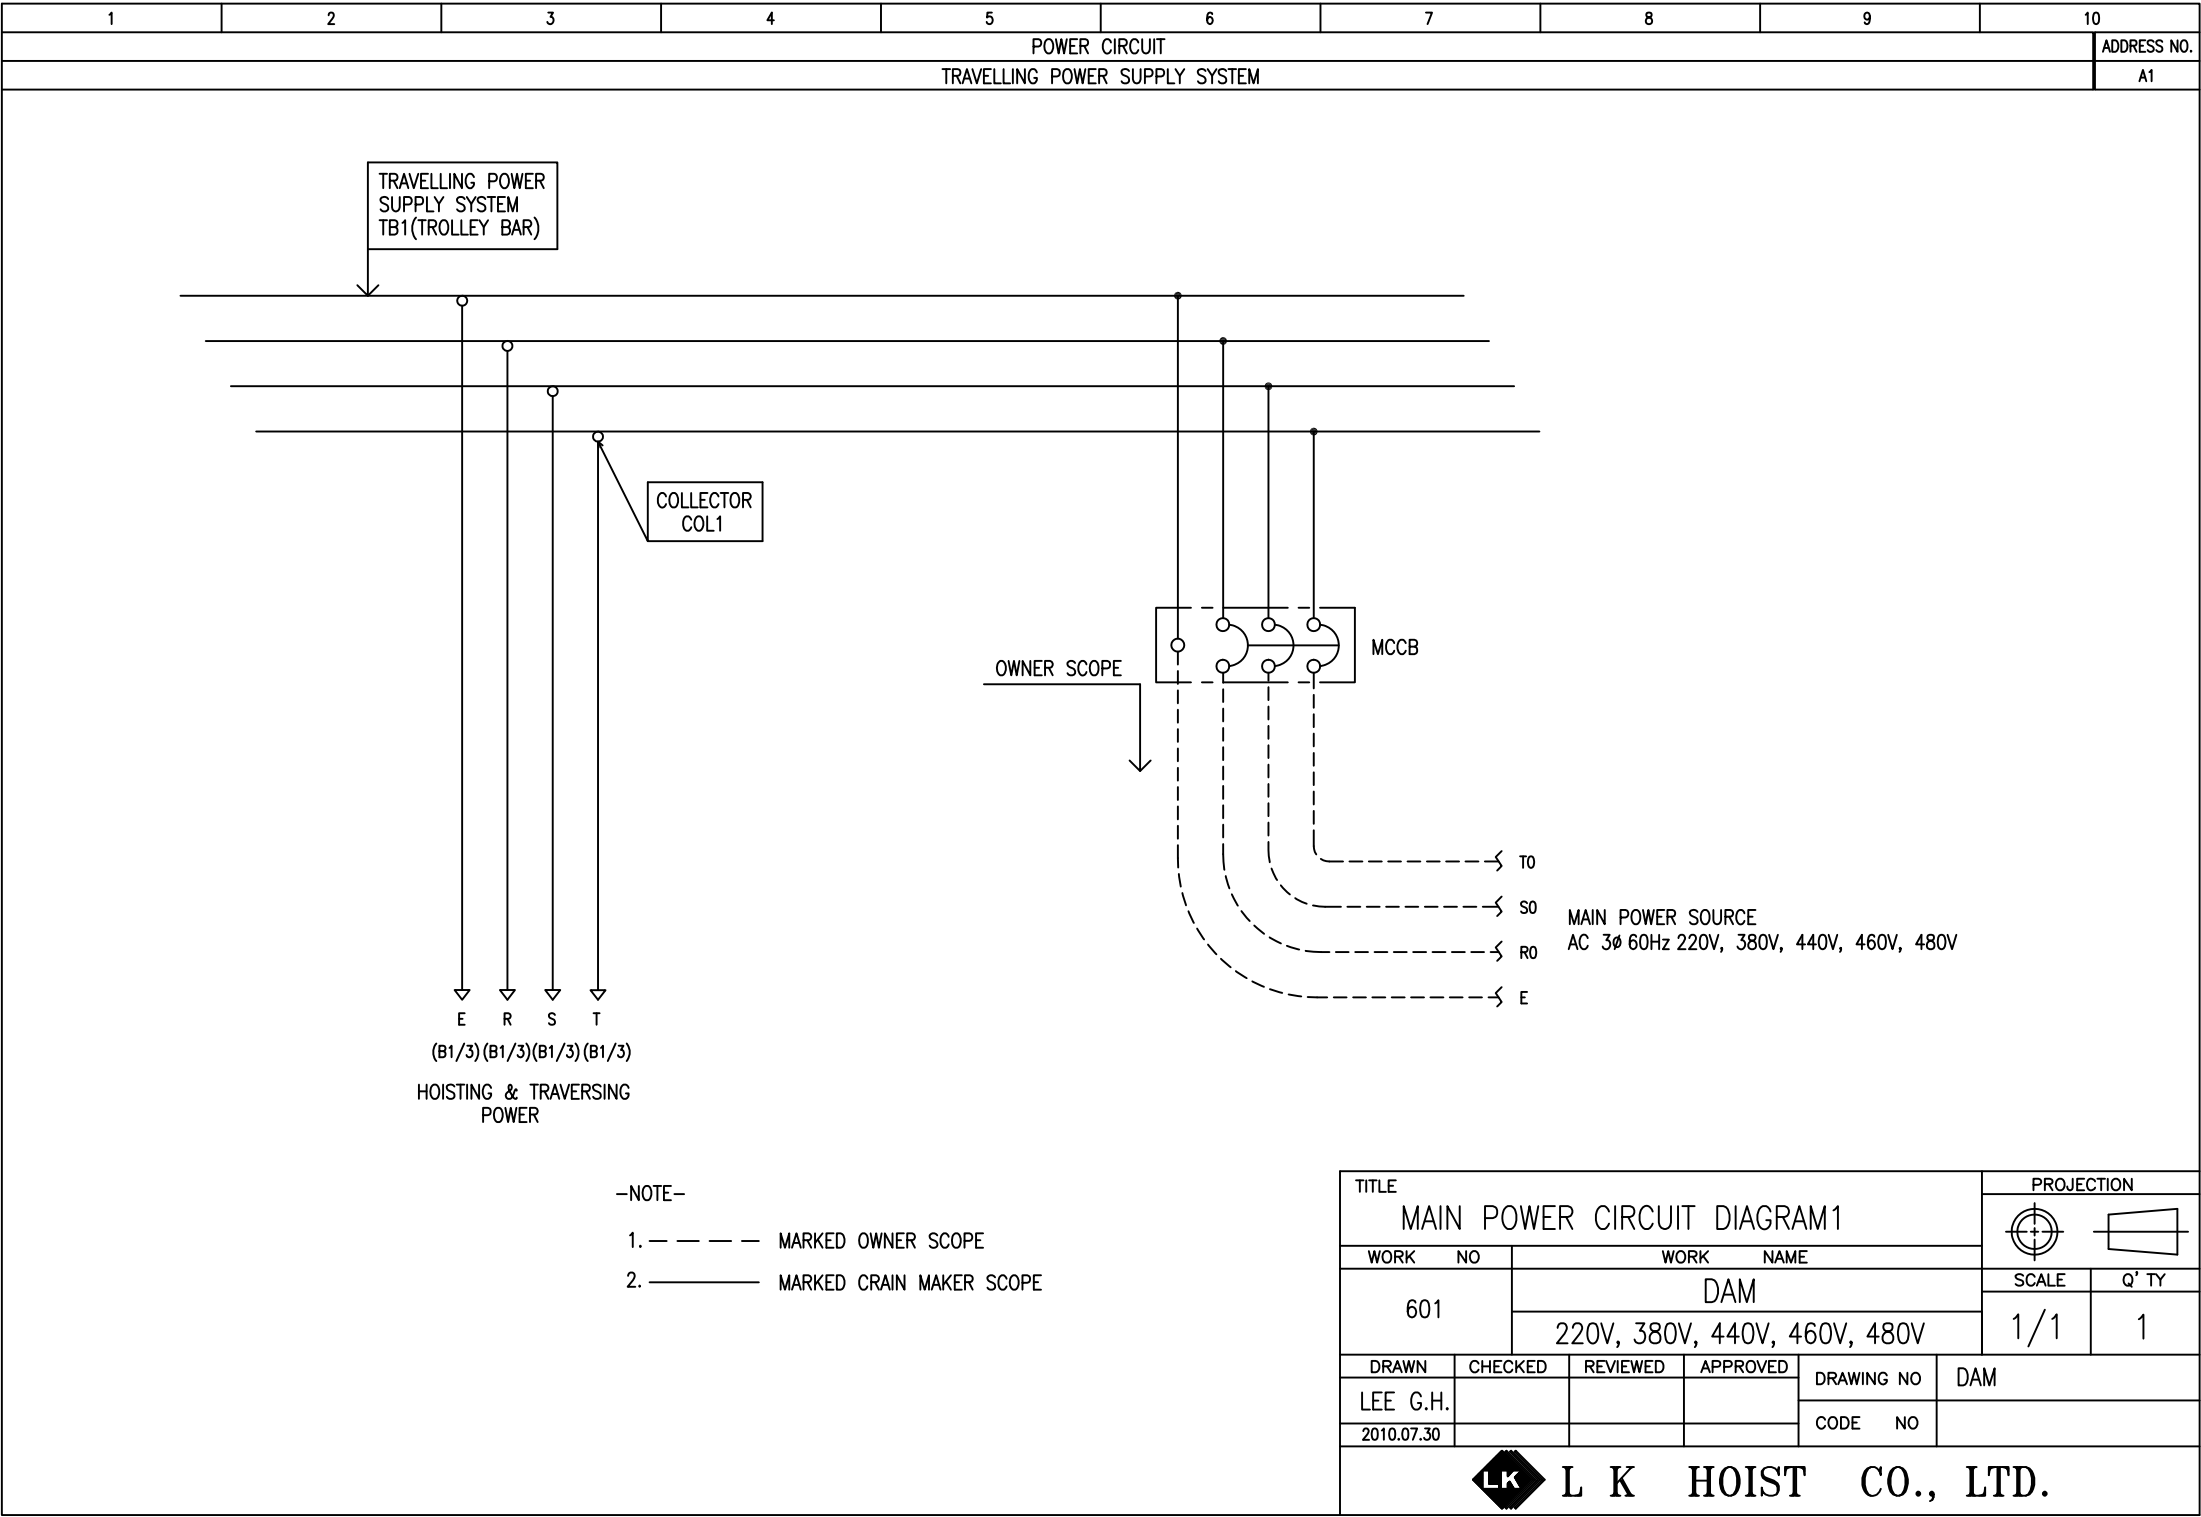


1	2	3	4	5	6	7	8	9	10		
POWER CIRCUIT					CONTROL CIRCUIT					ADDRESS NO.	B1

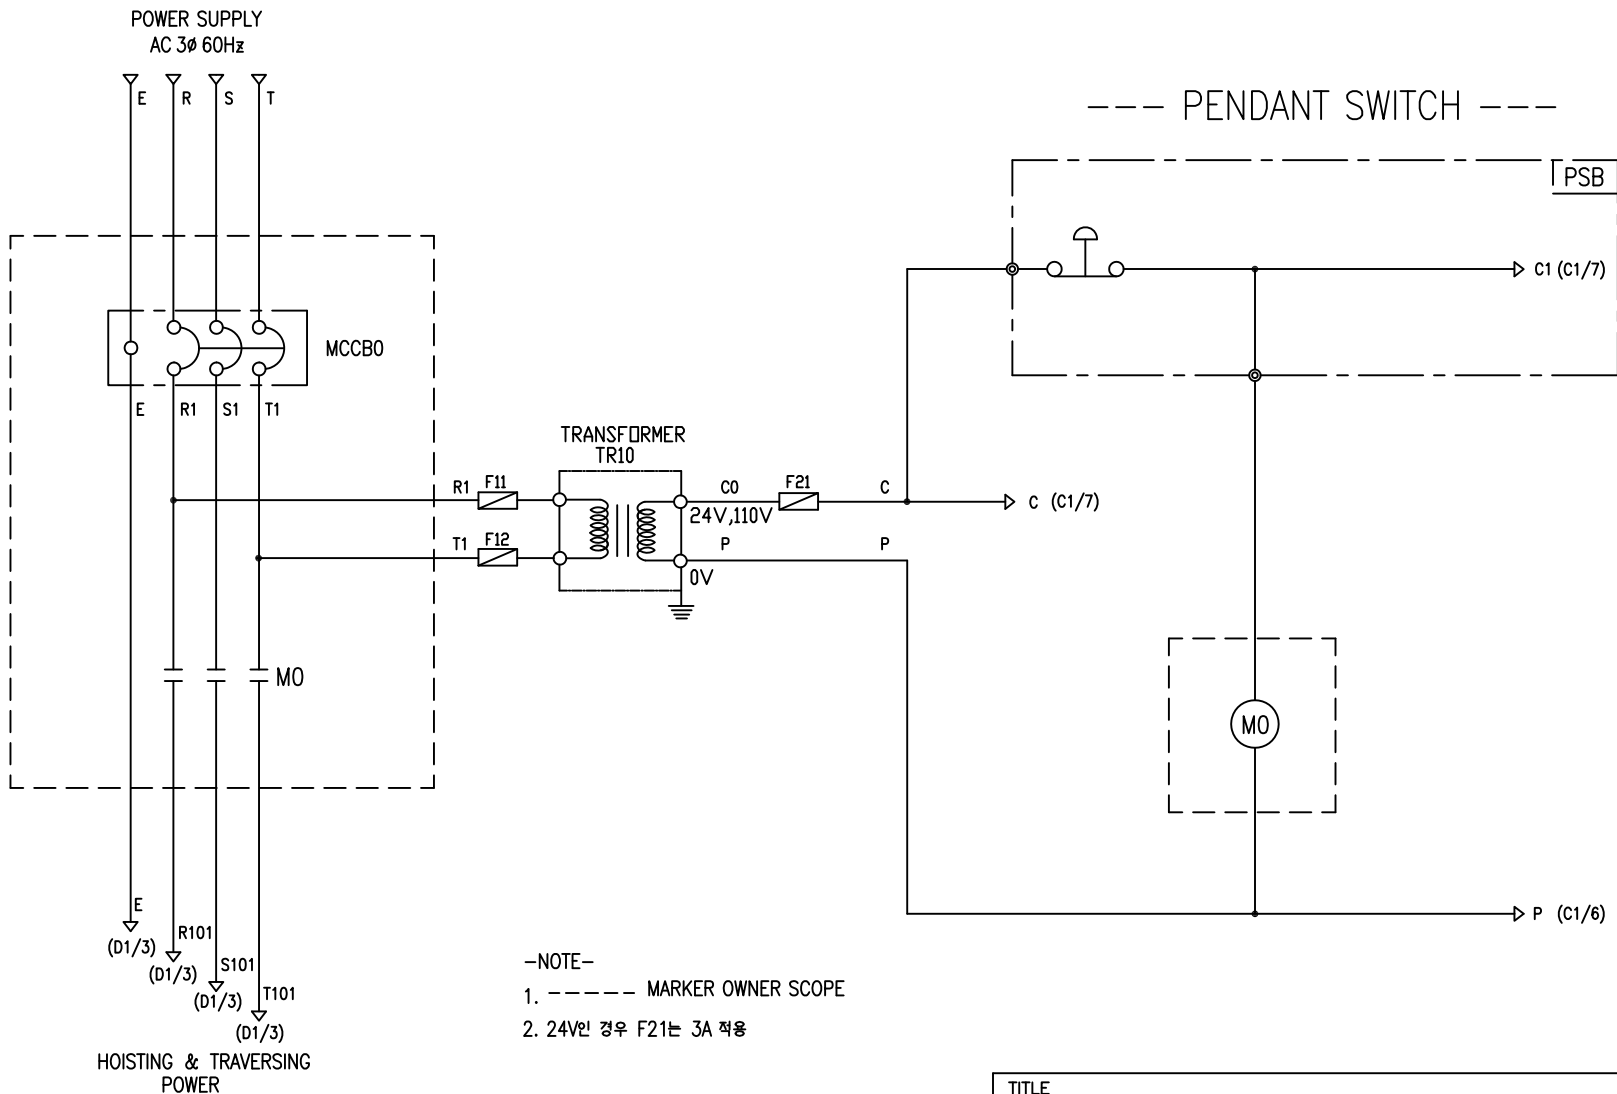


-NOTE-

1. ----- MARKER OWNER SCOPE
2. 24V인 경우 F21는 3A 적용

SPECIFICATION	NO FUSE BREAKER		MAGNET CONTACT		TRANSFORMER	FUSE
SYMBOLS	MCCB0		M0		TR10	F11, F12, F21
DESCRIPTION	220V	50A	GMC22	DMC-22	60VA	1A
	380V	30A				
	440V	20A				
	460V	20A				
	480V	20A				
MAKER	LS		LS	DONGA	LK	—

TITLE					PROJECTION	
MAIN POWER & CONTROL CIRCUIT DIAGRAM						
WORK	NO	WORK			NAME	
602		DAM			SCALE	Q' TY
		220V, 380V, 440V, 460V, 480V			1/1	1
DRAWN	CHECKED	REVISED	APPROVED	MODEL	DAM	
LEE.G.H				CODE	NO	
2010.07.30						
 L K HOIST CO., LTD.						

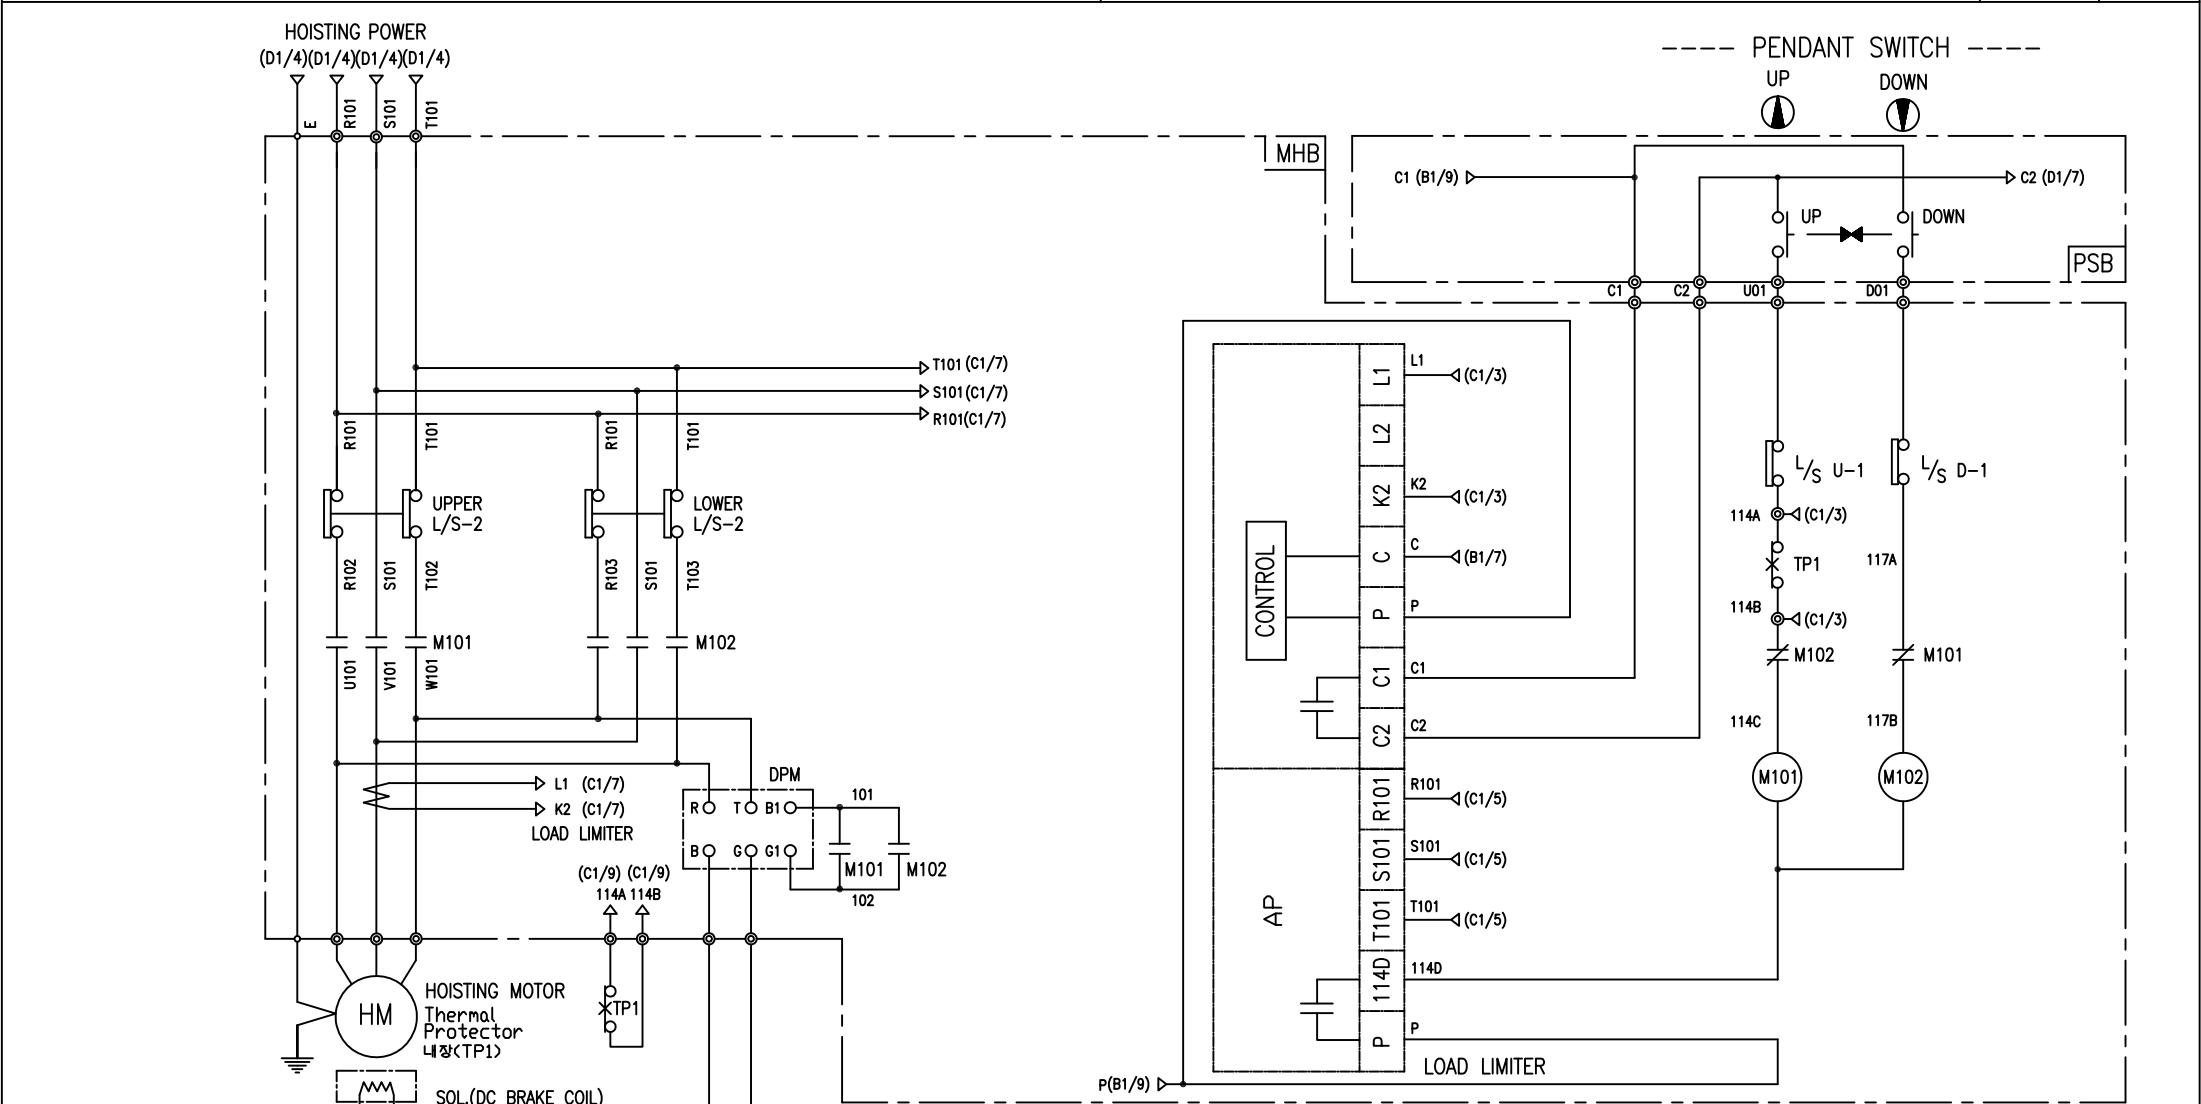

SPECIFICATION	MAGNET CONTACT		LOAD LIMITER	SILICON RECTIFIER				Thermal Protector	HOIST MOTOR
SYMBOLS	M101, M102		—	DPM				TP1	HM
DESCRIPTION	DMC-22	GMC-22	LKDL-601	AC220V	AC440V	AC460V	AC480V	17AM032	3.5Kw * 4P
				DC99V	DC198V	DC207V	DC216V		
MAKER	DONG-A	LS	LK	LK				Texas Instruments	LK

TITLE

HOIST POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

603

WORK NAME

DAM

220V, 440V, 460V, 480V

PROJECTION

SCALE

1/1

Q' TY

1

DRAWN

LEE.G.H

2010.07.30

CHECKED

REVIEWED


APPROVED

MODEL

DAM

LK

L K HOIST CO., LTD.

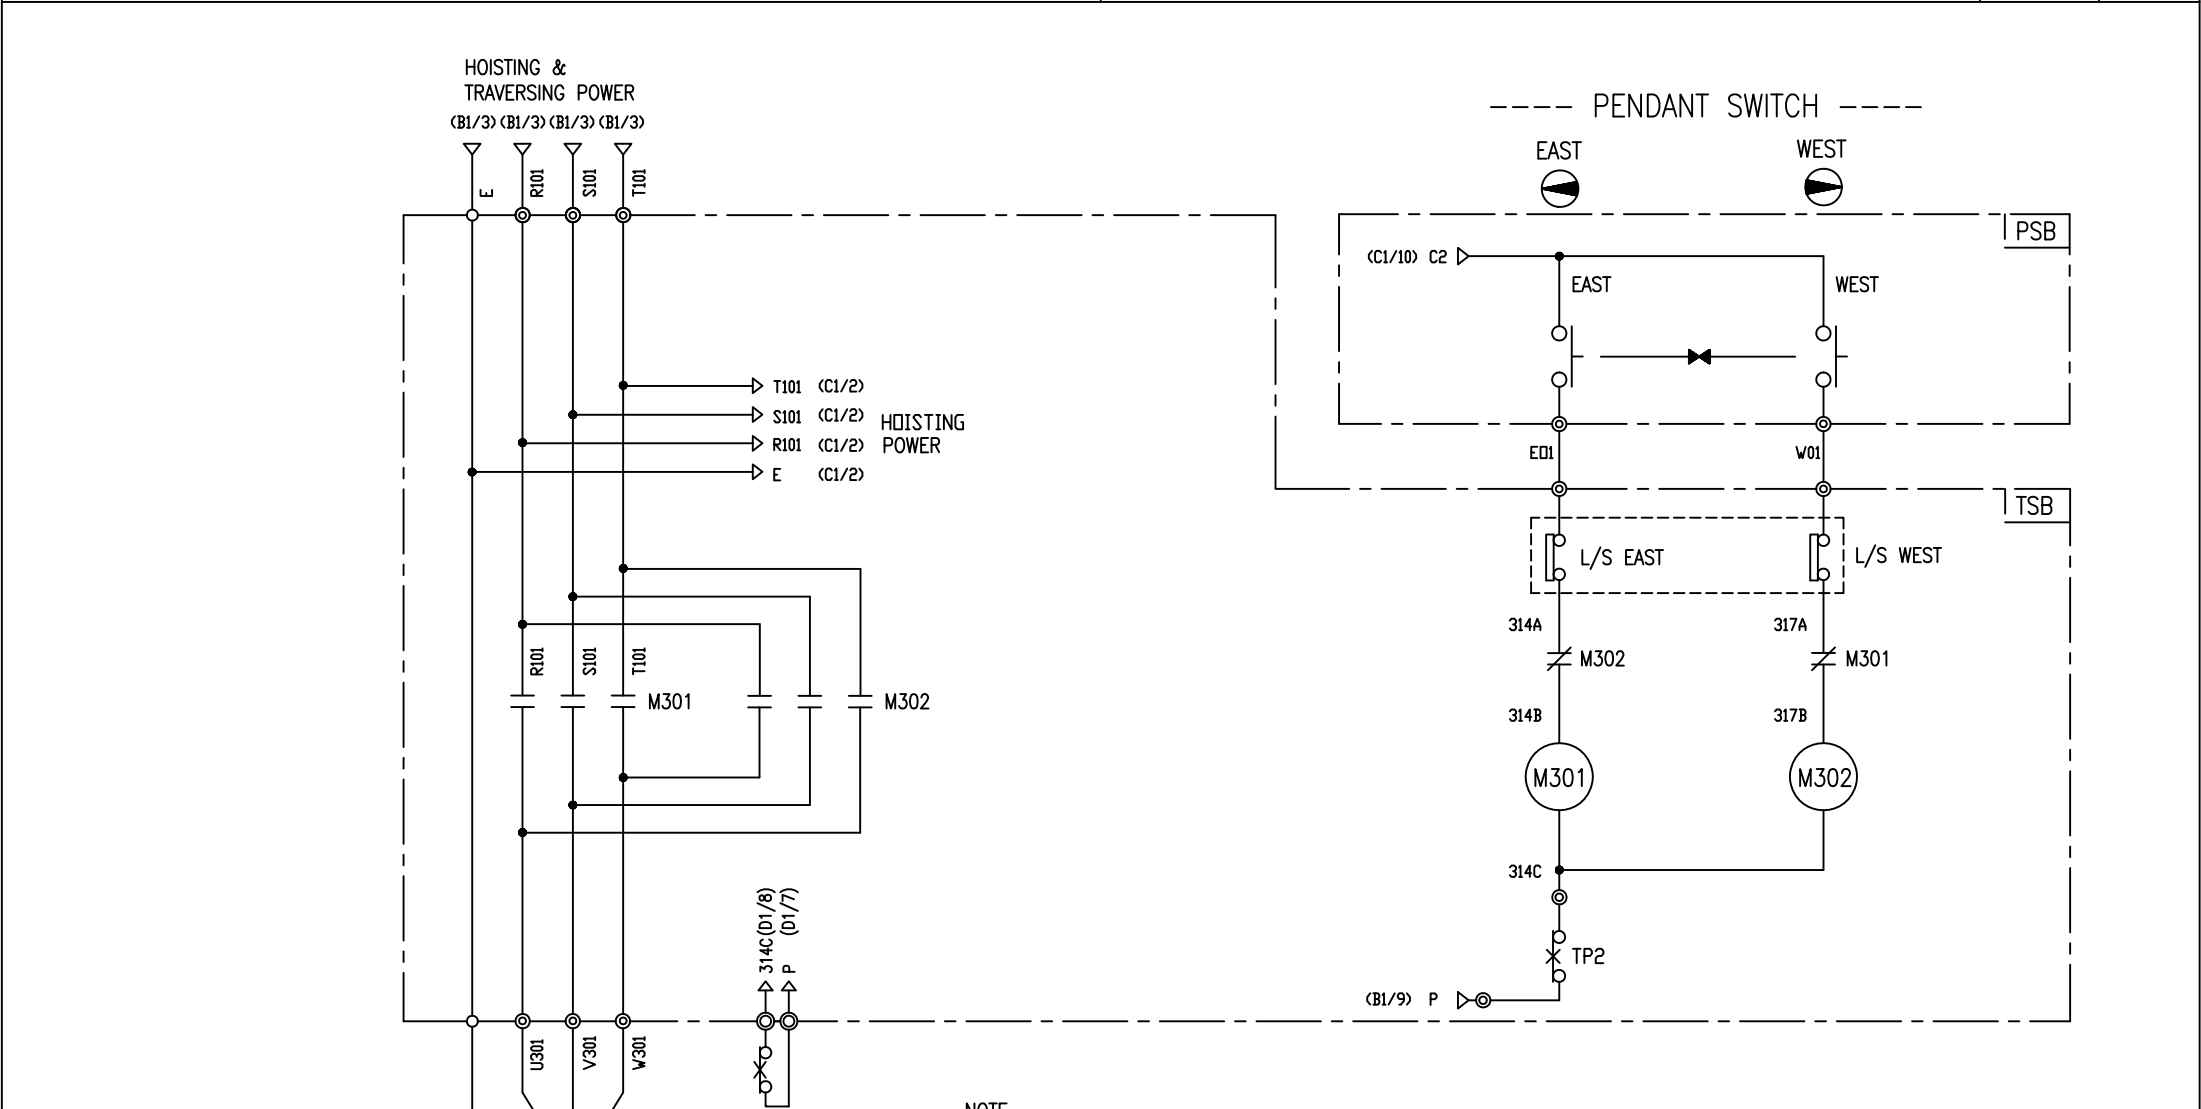

SPECIFICATION				MAGNET CONTACT		Thermal Protector		TRAVERSING MOTOR	
SYMBOLS				M301, M302		TP2		TM	
DESCRIPTION				GMC12	DMC12	17AM032		0.75KW *4P	0.4KW *6P
MAKER				LS	DONGA	Texas Instruments		LK	

TITLE

TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

605

WORK NAME

DAM

220V, 380V, 440V, 460V, 480V

DRAWN

LEE.G.H

CHECKED

REVIEWED

APPROVED

MODEL


DAM

CODE NO

2010.07.30

L K HOIST CO., LTD.

PROJECTION	
SCALE	Q' TY
1/1	1

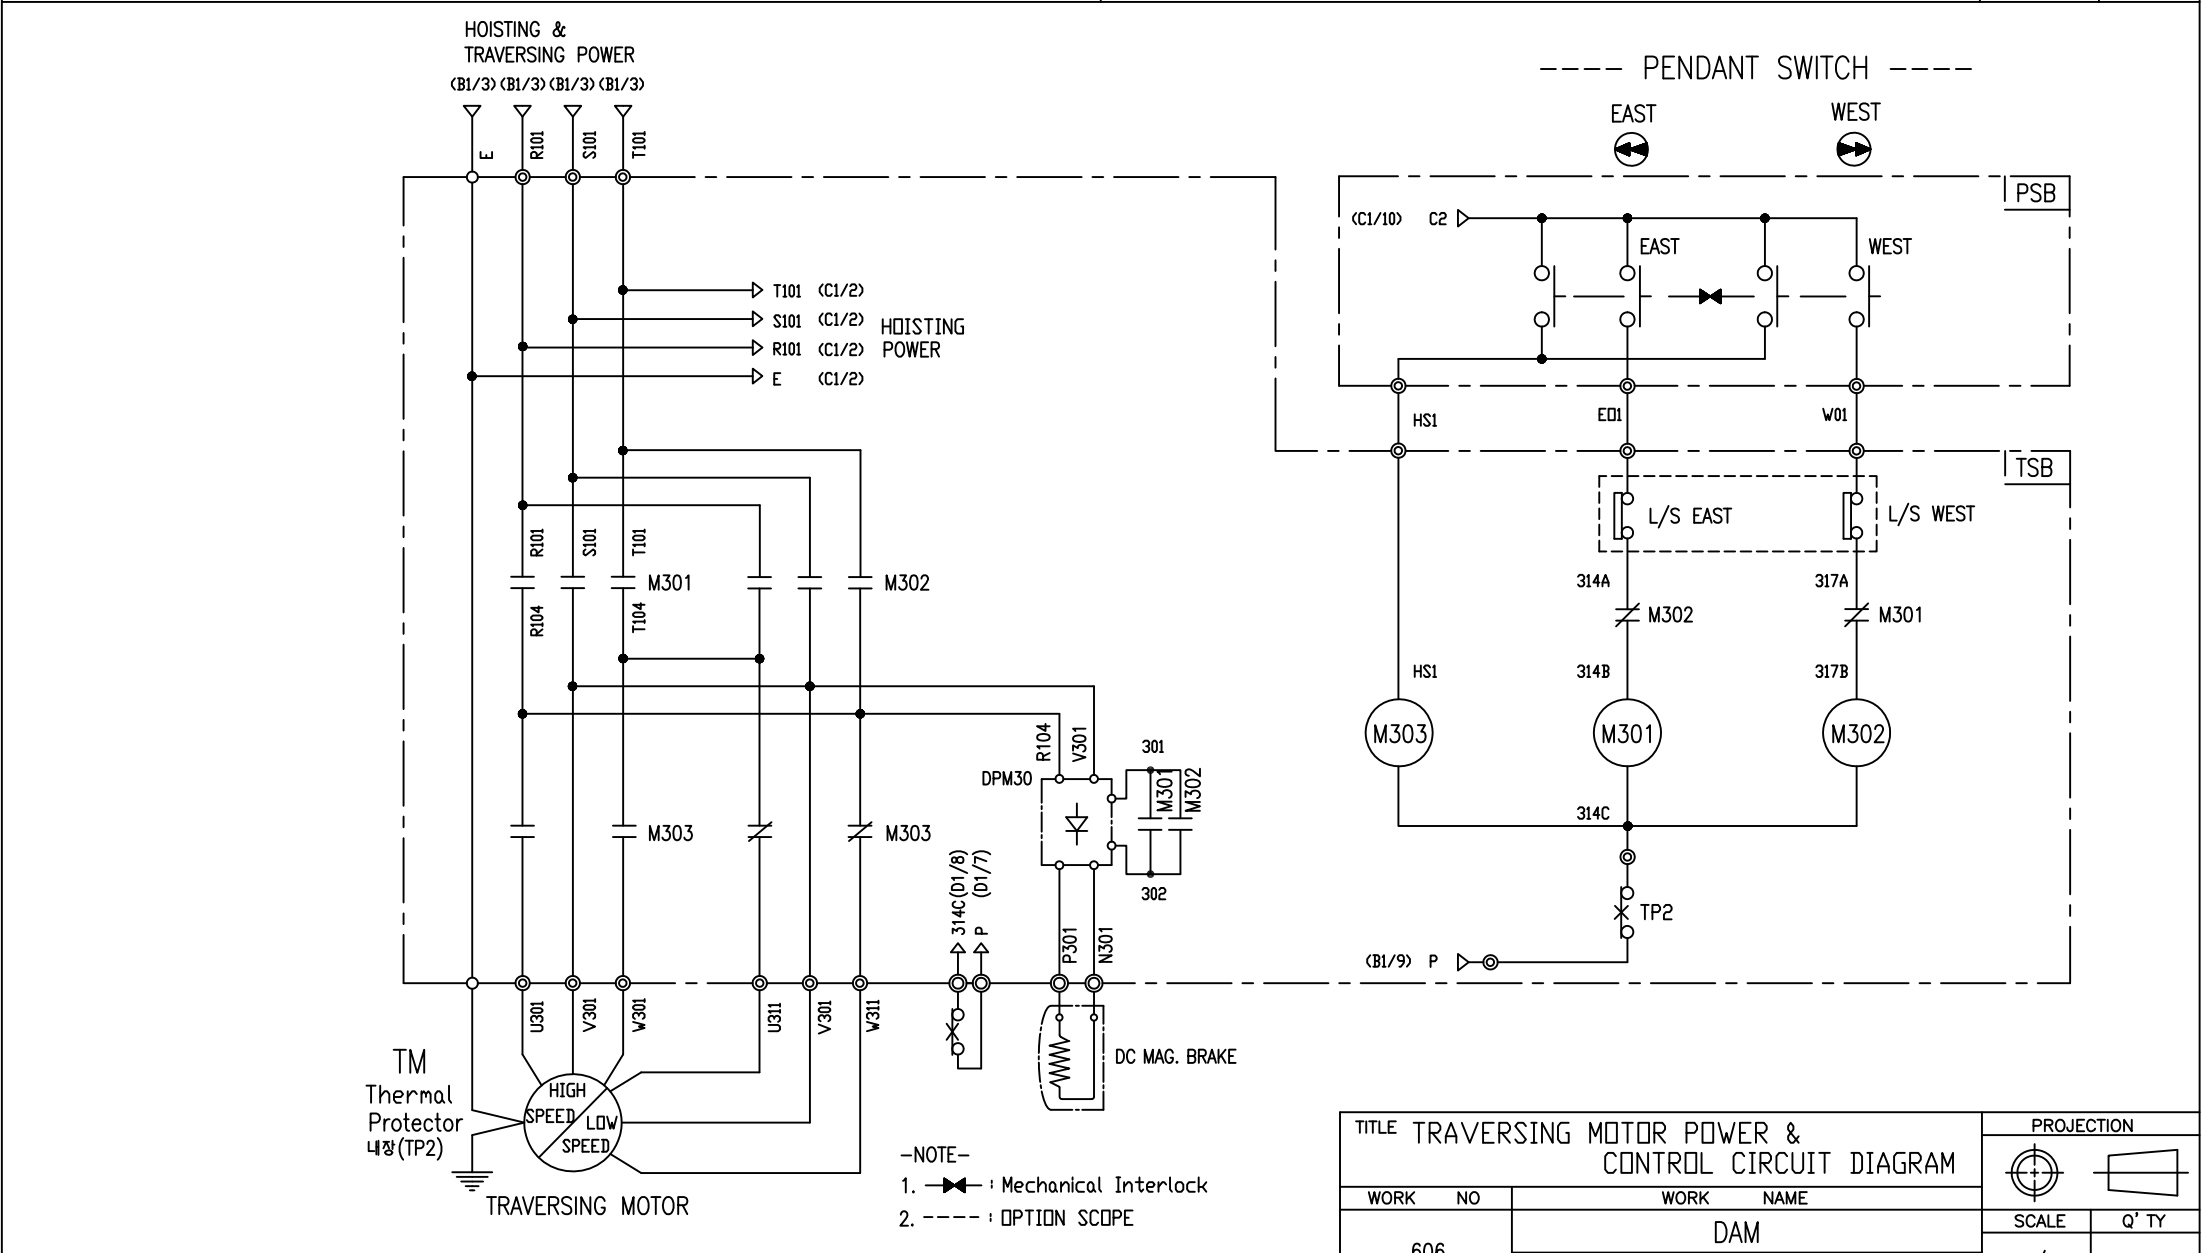

SPECIFICATION	MAGNET CONTACT		Thermal Protector	SILICON RECTIFIER					TRAVERSING MOTOR
SYMBOLS	M301, M302, M303		TP2	DPM30					TM
DESCRIPTION	GMC12	DMC12	17AM032	AC220V	AC380V	AC440V	AC460V	AC480V	0.75/0.25KW *4/12P
				DC99V	DC171V	DC198V	DC207V	DC216V	
MAKER	LS	DONGA	Texas Instruments	LK					LK

TITLE

TRAVERSING MOTOR POWER & CONTROL CIRCUIT DIAGRAM

WORK NO

606

WORK NAME

DAM

220V, 380V, 440V, 460V, 480V

PROJECTION

SCALE

Q' TY

1/1

1

DRAWN

LEE.G.H

2010.07.30

CHECKED

REVIEWED

APPROVED

MODEL

DAM

CODE NO

LK

L K HOIST CO., LTD.

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	HOISTING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	3.5 - 4 - 22	
4. RATED POWER	3.5 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	220 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	30 MIN	
8. LOCATION	IN-DOOR , OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	80℃	
11. FULL LOAD SPEED	1740 RPM	
12. FULL LOAD CURRENT	17.2 A	
13. STARTING CURRENT AT RATED VOLTAGE	85.1 A	
14. MINIMUM STARTING VOLTAGE	198 V	
15. EFFICIENCY AT 100% RATED LOAD	73.5 %	
16. POWER FACTOR AT 100% RATED LOAD	72.7 %	
17. STARTING TORQUE	240 %	
18. TYPE OF ENCLOSURE	전폐형(IP-54)	
19. TYPE OF BEARING	PL : 6205DD OPL : 6008ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75 - 4 - 22	
4. RATED POWER	0.75 KW × 4 P	
5. RATED VOLTAGE AND FREQUENCY	220 V 60HZ	
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1670 RPM	
12. FULL LOAD CURRENT	4.8 A	
13. STARTING CURRENT AT RATED VOLTAGE	26.4 A	
14. MINIMUM STARTING VOLTAGE	198 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.4 - 6 - 22	
4. RATED POWER	0.4 KW × 6 P	
5. RATED VOLTAGE AND FREQUENCY	220 V	60HZ
6. ROTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1140 RPM	
12. FULL LOAD CURRENT	3.2 A	
13. STARTING CURRENT AT RATED VOLTAGE	17.5 A	
14. MINIMUM STARTING VOLTAGE	198 V	
15. EFFICIENCY AT 100% RATED LOAD	65 %	
16. POWER FACTOR AT 100% RATED LOAD	63 %	
17. STARTING TORQUE	250 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPERATURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	

SPECIFICATION FOR ELECTRIC MOTORS	INTERNAL IDENTIFICATION NO.	PAGE : REV :
SCHEDULE OF TECHNICAL DATA		
1. SERVICE	TRAVERSING	
2. MANUFACTURE	LK HOIST CO. LTD	
3. MOTOR MODEL NO	0.75/0.25 - 4/12 - 22	
4. RATED POWER	0.75/0.25 KW × 4/12 P	
5. RATED VOLTAGE AND FREQUENCY	220 V	60HZ
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE	
7. RATING	15 MIN	
8. LOCATION	OUTDOOR	
9. INSULATION CLASS	B	
10. DESIGN TEMPERATURE RISE (BY RESISTANCE)	100℃	
11. FULL LOAD SPEED	1670 / 550 RPM	
12. FULL LOAD CURRENT	4.8 / 3.0 A	
13. STARTING CURRENT AT RATED VOLTAGE	26.4 / 16.5 A	
14. MINIMUM STARTING VOLTAGE	198 V	
15. EFFICIENCY AT 100% RATED LOAD	65 / 48 %	
16. POWER FACTOR AT 100% RATED LOAD	63 / 46 %	
17. STARTING TORQUE	249 / 245 %	
18. TYPE OF ENCLOSURE	전폐형	
19. TYPE OF BEARING	PL : 6008DD OPL : 6207ZZ	
20. MOUNTING	VERTICAL	
21. MAXIMUM AMBIENT TEMPURE	40℃	
22. BEARING LUBRICATION	GREASE	
23. STARTING METHOD	FULL VOLTAGE	