
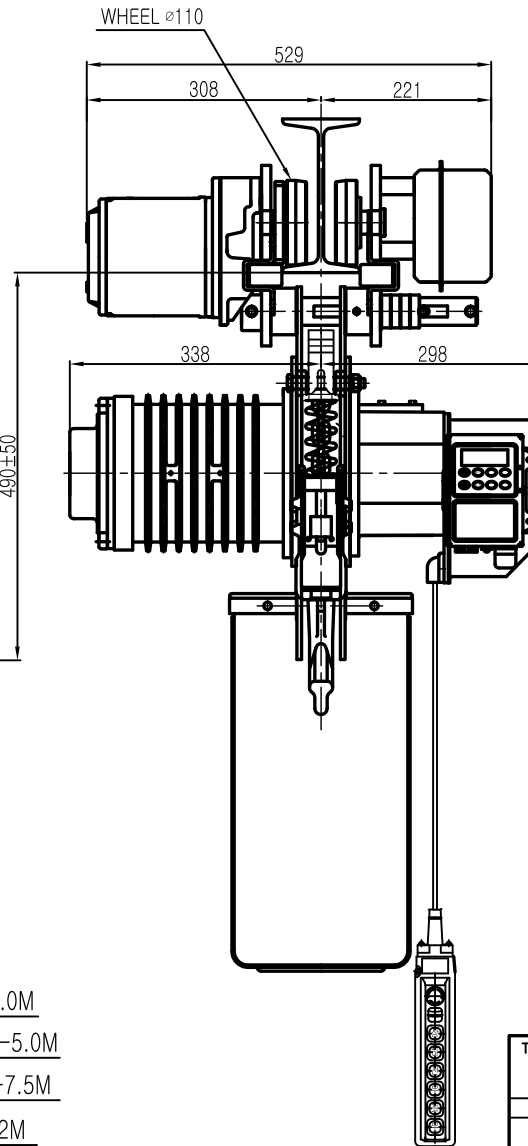


ON 3MD

L K HOIST

NO	DESCRIPTION	SIZE	MAT' L	Q' TY	WT (kg)	REMARKS

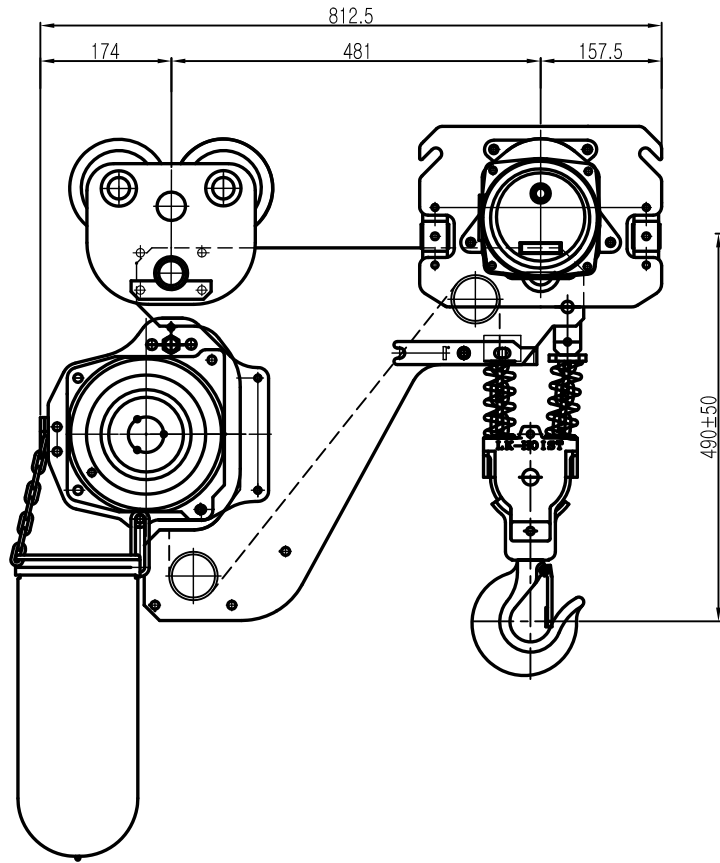

SPECIFICATION

		LK-SHDBM-2W		
RATED LOAD (TON)		2.0		
TESTING LOAD (TON)		2.5		
LIFTING HEIGHT (M)		50		
HOISTING	SPEED (M/MIN)	4.1/1.3		
	MOTOR (KW)	1.8/0.7kw x 2/6p		
TRAVERSING	SPEED (M/MIN)	21	14	21/7
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p	0.75/0.25kw x 4/12p
POWER SUPPLY		AC220,380,440,460,480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON . FL		
LOAD CHAIN		ø7.1 X 21 (2FALL)		
WEIGHT (KG)		300		
I-BEAM 적용폭		100 ~ 190MM		

NOTE)

- 1)점검 설비를 갖출 것
2)인허가 서류를 완성검사시 제출 할 것

적용 I-BEAM)

- 1) 지점간 거리: I-200X100X7/10 - 3.0M
2) 지점간거리 : I-250X125X7.5/12.5-5.0M
3) 지점간거리 : I-300X150X10/18.5-7.5M
4) 지점간거리 : I-450X175X13/26-12M
5) 지점간거리 : I-600X190X13/25-15M


TITLE					ELECTRIC CHAIN HOIST		PROJECTION	
WORK NO		WORK NAME						
DRAWN		LK-SHDBM-2W						
						SCALE	Q' TY	
						N S	1	
	CHECKED	REVIEWED	APPROVED	DRAWING NO				
김 창 기				CORD NO				
2010.08.01								
 L K HOIST CO., LTD.								

REV.NO	DATE	REVISION	DESCRIPTION	DRAWN	CHECKED	APPROVED

ON GMD

L K HOIST

NO	DESCRIPTION	SIZE	MAT' L	Q' TY	WT (kg)	REMARKS

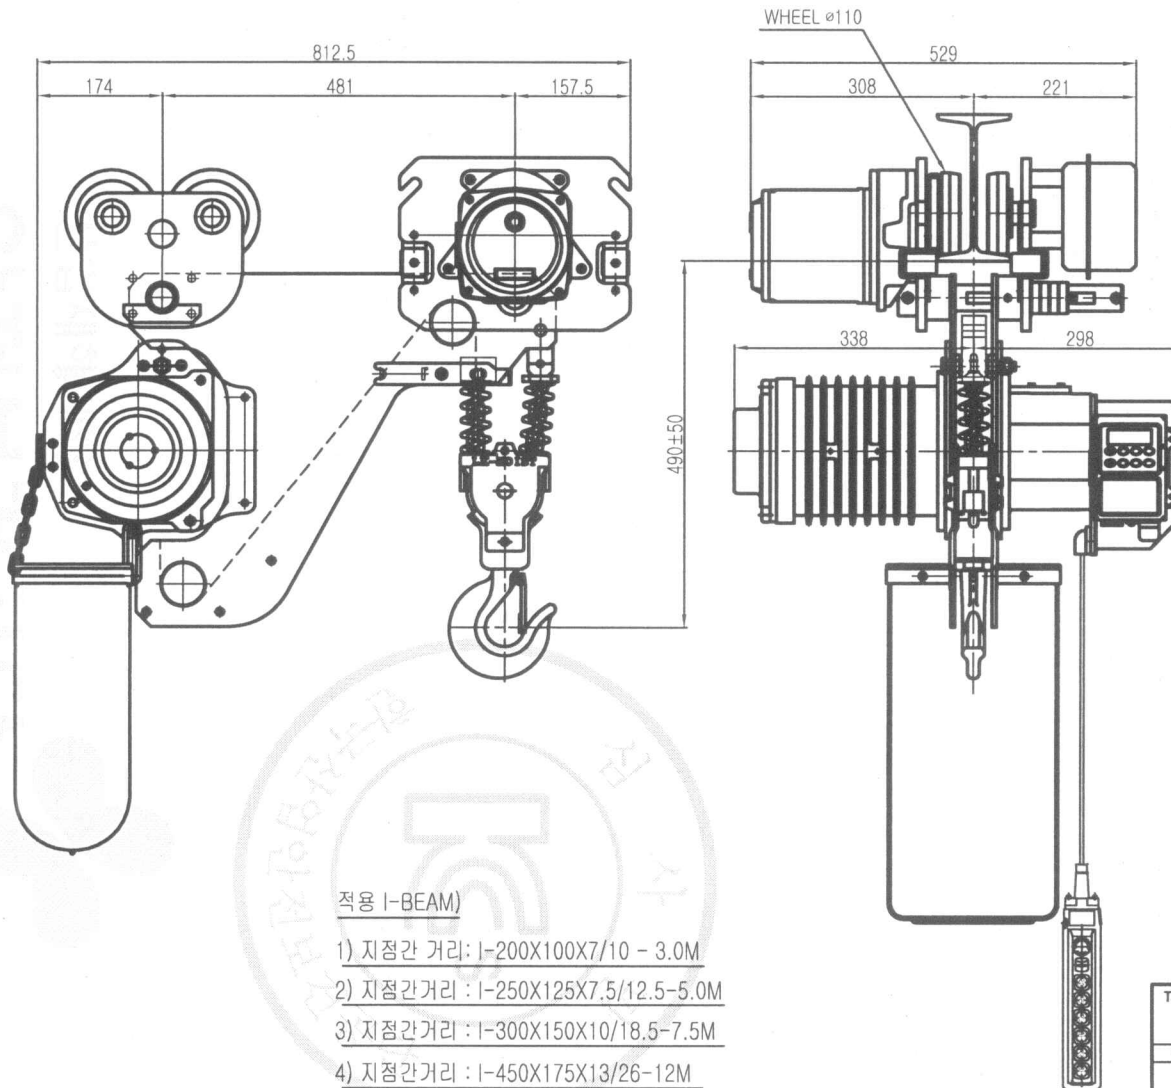

SPECIFICATION

		LK-SHDBM-2W		
RATED LOAD (TON)		2.0		
TESTING LOAD (TON)		2.5		
LIFTING HEIGHT (M)		50		
HOISTING	SPEED (M/MIN)	4.1/1.3		
	MOTOR (KW)	1.8/0.7kw x 2/6p		
TRAVERSING	SPEED (M/MIN)	21	14	21/7
	MOTOR (KW)	0.75kw x 4p	0.4kw x 6p	0.75/0.25kw x 4/12p
POWER SUPPLY		AC220.380.440.460.480Vx3ø x 60 Hz		
OPERATING METHOD		P.B type ON , FL		
LOAD CHAIN		ø7.1 X 21 (2FALL)		
WEIGHT (KG)		300		
I-BEAM 적용폭		100 ~ 190MM		

NOTE)

- 1)점검 설비를 갖추실 것
- 2)인허가 서류를 완성검사시 제출할 것

TITLE				ELECTRIC CHAIN HOIST		PROJECTION	
WORK NO		WORK NAME					
DRAWN		LK-SHDBM-2W				SCALE	Q' TY
						N S	1
	CHECKED	REVIEWED	APPROVED	DRAWING NO			
김 창 기				CORD NO			
2010.08.01							
LK L K HOIST CO., LTD.							

REV.NO	DATE	REVISION DESCRIPTION	DRAWN	CHECKED	APPROVED